

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







## SPECIFICATION CONTROL DRAWING

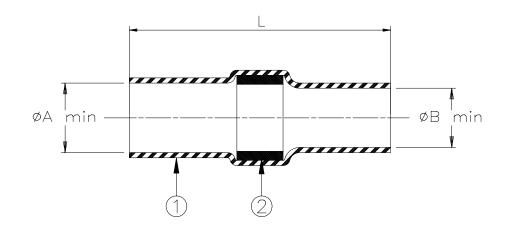

	I	Product Dimensio	Braid Dimensions		
Product Name	L	øΑ	øB	øD	ød
	max	min	min	max	min
D-106-2012	50.0	12.0	12.5	12.0	6.4
	(1.970)	(0.470)	(0.490)	(0.470)	(0.250)


## **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyolefin high density.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI-J-STD-006. FLUX: TYPE ROL1 per ANSI-J-STD-004.

- <u>APPLICATION</u>
  1. This part is designed to attach braided ground straps to the gross shield of a cable or a shielded backshell adapter, rated for 125°C minimum, meeting the dimensional criteria listed, and having tin or silver plated surfaces.
- 2. Temperature range: -55°C to +135°C.
- 3. Install using Raychem-approved convection heating tools.

For best results, prepare the cable as shown:



\* A trademark of Raychem Corporation.

Davaham		HERMOFIT DEVICES	300 Cons	Corporation stitution Drive ark, CA 94025	SOLDERSLEEVE* DEVICE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO: D-106-2012				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	drawing		n reserves the right to amend this at any time. Users should evaluate bility of the product for their ion.		DCR NUMBER: D990010		REPLACES: D-106-2009/2040	
DRAWN BY: M. FORON	DΑ	DATE: 5-Jan-9	99	PROD. REV. C	DOC ISSUE:	SCALE: None	SIZE:	SHEET: 1 of 1