

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







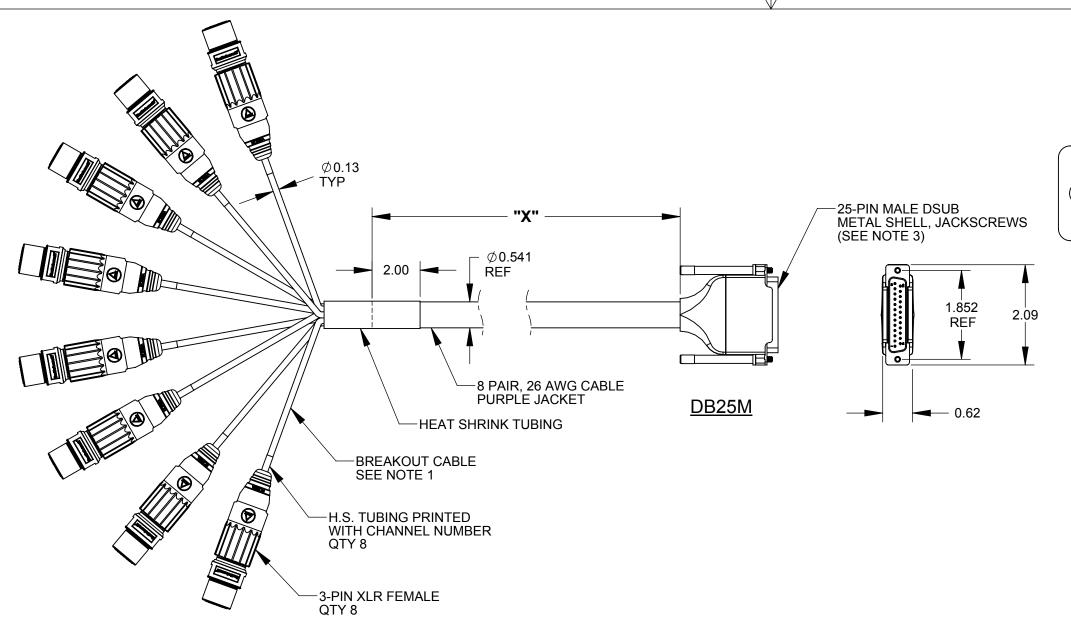

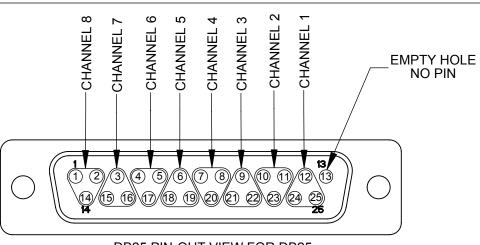

## DB25 PIN-OUT VIEW FOR DB25

DB25 AND XLR FEMALE WIRING CHART									
XLR	CABLE	PIN 2	PIN 3	PIN 1					
(CHANNEL)	(COLOR)	(RED)	(BLACK)	(BARE)					
1	BROWN	24	12	25					
2	RED	10	23	11					
3	ORANGE	21	9	22 8					
4	YELLOW	7	20						
5	GREEN	18	6	19					
6	BLUE	4	17	5					
7	PURPLE	15	3	16					
8	GRAY	1	14	2					

PART NO.	CABLE LENGTH " <b>X</b> "						
DB25M02XLRF	2.00 FT +/- 1.50 IN						
DB25M03XLRF	3.00 FT +/- 1.50 IN						
DB25M10XLRF	10.00 FT +/- 1.50 IN						

## **CUSTOMER DRAWING**

					-									
						THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.								
					UNLESS OTHERWISE SPECIFIED	SIZE	W	IDTH	MULT		LBS/M		TEMPER	
					1. ALL DIMENSIONS IN INCHES	FINISH			MATERIAL					
D	26795	7-8-11	то	TJK	- TWO PLACE DECIMALS ±0.02	SPEC No.			SPEC No.					
С	26637	10/11/10	RS	TJK	- THREE PLACE DECIMALS ±0.005				SCALE 2:1	- -Swilehereff				.GD®
В	25891	9/9/08	SRC	TJK		DATE DRAWN BY CHKD		APVD						
^	25716	10/03/07	JGK	TJK		U/12/06   JGK		RS	TJK					
Α	257 10	10/03/07	JGK	IJK				11/8/10	11/9/10		SHEET	1 0	)F 1	
REV	ECO NUMBER	DATE	BY	APVD		NAME				PART No.				REV
REVISIONS		DO NOT SCALE DRAWING	DB25M TO 8 FEMALE XLR, RoHS			D	B25M_	XLI	₹F					

## NOTES:

- 1. BREAKOUT CABLE LENGTH: 18.00 +/- 0.75 INCHES. SEE TABLE FOR COLOR.
- 2. THIS PRODUCT COMES COILED AND PACKAGED IN BAG.
- 3. JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (2) AND #M3 THREAD (2) JACKSCREWS.
- 4. MATERIALS:

XLR FEMALE CONNECTOR:

HANDLE - ZINC ALLOY, NICKEL PLATED

HOUSING AND LATCH - ZINC ALLOY, NICKEL PLATED

INSULATOR - THERMOPLASTIC, GREEN

SOCKET CONTACTS - SPECIAL COPPER ALLOY, SILVER PLATED

H.S. TUBING - THERMOPLASTIC

DSUB - COPPER ALLOY, NICKEL PLATED WITH GOLD PINS

JACKSCREWS - STAINLESS STEEL

5. THIS PRODUCT IS ROHS COMPLIANT.