



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# SparkFun ESP32 Thing Motion Shield

DEV-14430 **RoHS**

**Notice.** This product requires other products in order to function properly. See essential products.

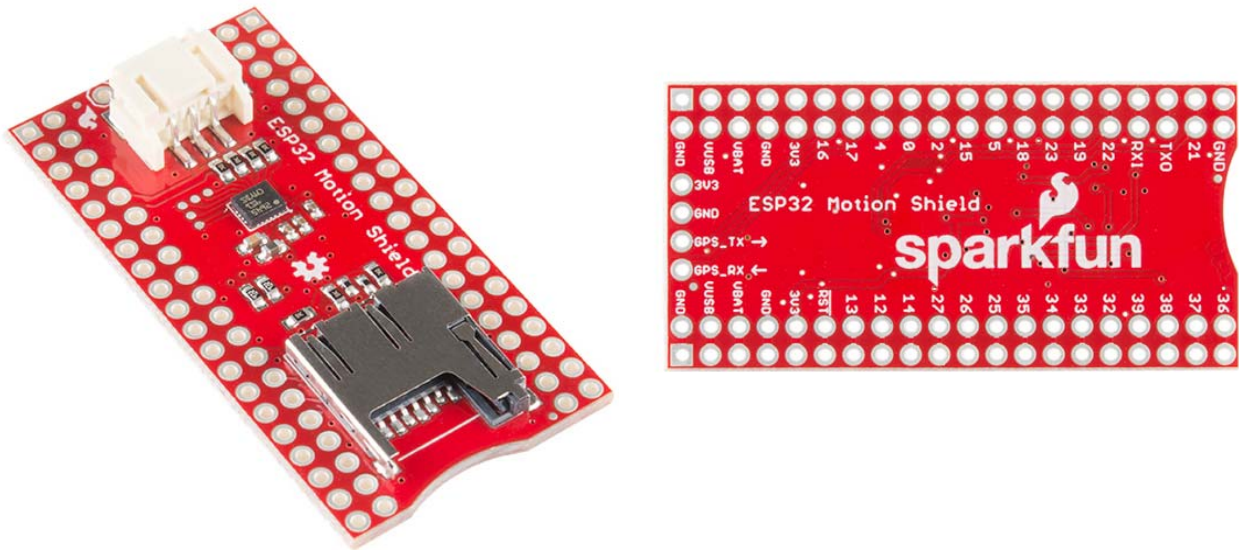

The SparkFun ESP32 Thing Motion Shield is a versatile, motion-sensing addition to our ESP32 Thing. With the Motion Shield's onboard LSM9DS1 IMU, small movement changes can easily be detected, while larger movements and time traveled can be detected with the addition of a GPS module via a large JST port. In addition, we have added breakout pins to attach any serial device, as well as a microSD card slot to log all of your data. All you need to do is solder on headers, and your ESP32 Thing Motion Shield will be ready to detect any type of movement!

The LSM9DS1 is one of only a handful of ICs that can measure three key properties of movement — angular velocity, acceleration and heading — in a single IC. By measuring these three properties, you can gain a great deal of knowledge about an object's movement and orientation. The LSM9DS1 measures each of these movement properties in three dimensions. That means it produces nine pieces of data: acceleration in x/y/z, angular rotation in x/y/z and magnetic force in x/y/z.

Each sensor in the LSM9DS1 onboard the Thing Motion Shield supports a wide spectrum of ranges: the accelerometer's scale can be set to  $\pm 2$ , 4, 8 or 16 g; the gyroscope supports  $\pm 245$ , 500 and 2000  $^{\circ}/s$ ; and the magnetometer has full-scale ranges of  $\pm 4$ , 8, 12 or 16 gauss.



## FEATURES

- 3 acceleration channels, 3 angular rate channels, 3 magnetic field channels
- $\pm 2/\pm 4/\pm 8/\pm 16$  g linear acceleration full scale
- $\pm 4/\pm 8/\pm 12/\pm 16$  gauss magnetic full scale
- $\pm 245/\pm 500/\pm 2000$  dps angular rate full scale
- SPI / I<sup>2</sup>C serial interfaces
- Operating Voltage: 3.3V
- microSD Card Slot
- JST Connector for GPS UART

