



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 160W to 165W Medical AC-DC External Power Supplies

### Features

- ◆ CEC, ErP and EISA<sup>(1)</sup> level V Compliant Models
- ◆ Wide Range AC Input
- ◆ Medical Certifications
- ◆ > 87% Average Efficiency



### Key Market Segments & Applications



Medical



RoHS

### Specifications


Model		DTM165PWxxx-C
Input Voltage range	VAC	90 - 264VAC (47 - 63Hz)
Inrush Current	A	<130A at 230VAC input, 25°C ambient cold start
Input Current	A	2.5A at 90VAC, Full Load
Power Factor	-	Meets EN61000-3-2. >0.9 PF
Leakage Current (264VAC 60Hz)	uA	<300uA
Hold Up Time (Typ)	ms	>10ms
Temperature Coefficient	%/°C	±0.05%/°C
Voltage Accuracy	%	±1%
Adjustment Range	V	None
Minimum Load	A	None
Total Regulation	%	12V to 19V Models:±5%, >19V models ±3%
Ripple & Noise	%	1%
Short Circuit Protection	-	<160% - hiccup mode
Overvoltage Protection	V	120 - 150% of nominal (Cycle input power to reset)
Efficiency	%	>87% average efficiency
Operating Temperature	°C	0 to +60°C, derate linearly 50% load from 40 to 60°C
Storage Temperature	°C	-10 to +80°C
Humidity (non condensing)	%RH	0 - 90%RH
Cooling	-	Convection
Withstand Voltage	VAC	Input to Ground 1.5kVAC, Input to Output 4kVAC (Reinforced)(2 x MOPPs) (Output is isolated from Ground)
Vibration (non operating)	-	23.52m/s <sup>2</sup> (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)
Shock	-	< 196.1 m/s <sup>2</sup> (20G)
Safety Agency Certification	-	UL60601-1, EN60601-1, IEC60601-1, CE Mark
Efficiency Level	-	CEC, ErP, EISA level V
Offload Power Consumption	W	< 0.5W
Conducted & Radiated EMI	-	EN55011, FCC Part 18 Class B
Immunity	-	EN55011:2007+A2:2007
Weight (Typ)	g	790
Size (WxLxH)	in	3.35 x 6.7 x 1.73"
Cable Length	mm	1050mm
AC Input Connector	-	IEC 320-C14 (Accepts IEC 320-C13)
Output Connector	-	Kycon KPPx-4P or equivalent Pins 1 & 2: -Vout, Pins 3 & 4: +Vout
Warranty	yrs	Two Years

(1) EISA - Energy Independence and Security Act of 2007

## Output Ratings

Model	Output (V)	Maximum Output (A)	Maximum Power (W)
DTM165PW120C	12	13.333	160
DTM165PW150C	15	10.67	160
DTM165PW190C	19	8.42	160
DTM165PW240C	24	6.88	165
DTM165PW280C	28	5.89	165
DTM165PW360C	36	4.58	165
DTM165PW480C	48	3.44	165

## Outline Drawing

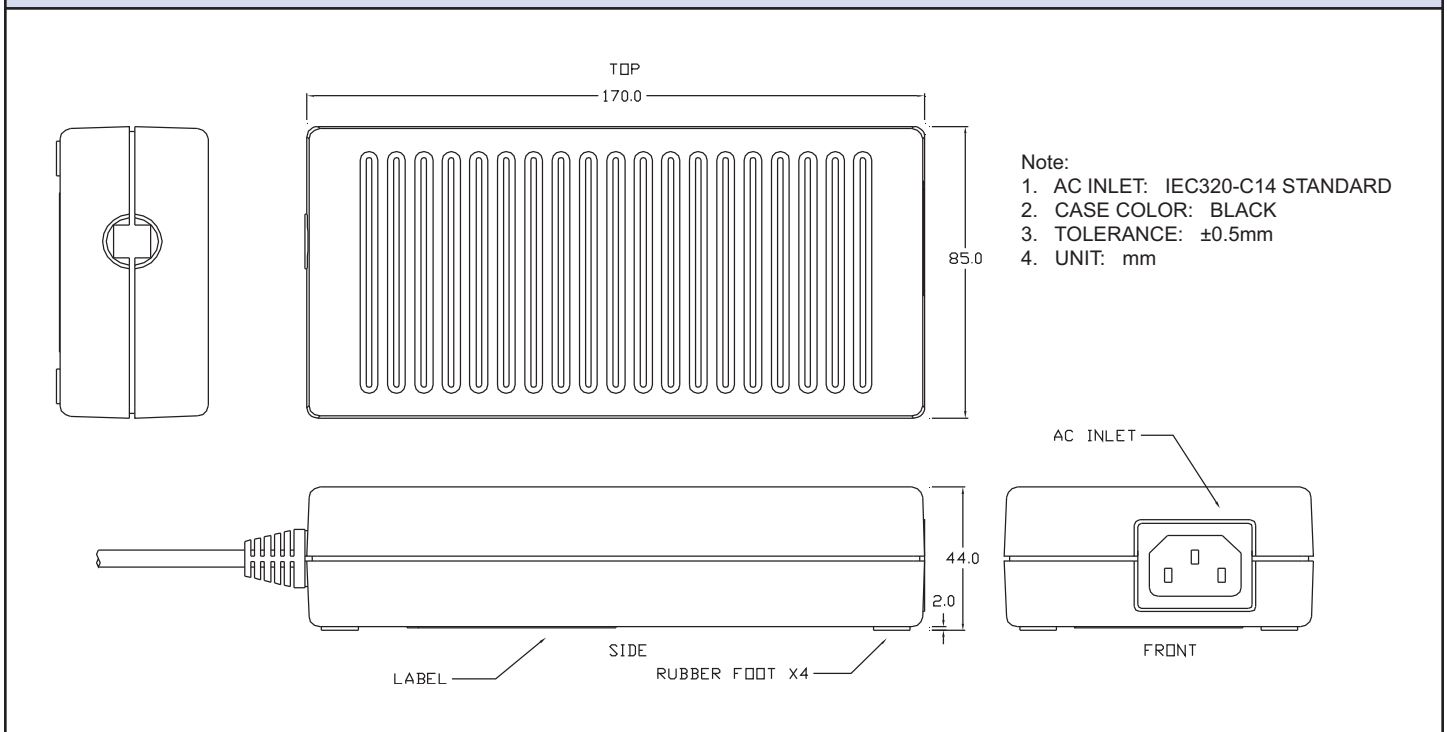

## Other AC-DC Products

DT62-D	62W CEC Compliant Adapters
DTM65-C	40W to 65W Medical Adapters
DT80-D	80W CEC Compliant Adapters
DT100 / 150-C/D	100W & 150W CEC Compliant Adapters
DTM110-C	90W to 110W Medical Adapters

For Additional Information, please visit [us.tdk-lambda.com/lp/products/dt-c-series.htm](http://us.tdk-lambda.com/lp/products/dt-c-series.htm)

