



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Snap Action Switch

Double Pole General Purpose

E19, E20, G20



Features

- Choice of 3 current ratings
- Long life coil spring, snap action mechanism
- Agency approved extended life versions available
- RoHS compliant
- High temperature versions available – contact factory

Typical Applications

- Household appliances
- Automated assembly lines
- Brake switch on utility vehicles
- Industrial and accessible door openers
- Vending machines

Part Number Breakdown

E19-00A0

Example: E19-00A0 is a 15 A, normally open DPDT pole switch with a standard ratio button actuator.

Series Type		Type ¹		Circuitry		Actuator ¹	
E19	Double pole 15 A	0	Standard ratio actuator or button	0	Double Throw	A	Button
E20	Double pole 20 A	5	High ratio actuator	1	Normally Open	H	Lever
G20	Double pole 0.1 A			2	Normally Closed	J	Button with ferrule
						K	Roller
						M	Button with extra over-travel and ferrule

¹See Actuator Specifications section for available actuator/type combinations

Electrical Specifications per UL1054 – Min 6000 Operations

Series	Operations	Current Rating
E19	6000 operations; 100,000 available – contact factory	15 A, 125 / 250 VAC ¾ HP, 125 VAC / 1 ½ HP, 250 VAC
E20	6000 operations	20 A, 125 / 250 VAC 1 HP, 125 VAC / 2 HP, 250 VAC
G20	100,000 operations	0.1 A, 125 VAC

Commonly Stocked Distributor Parts








E19-00A0	E19-00M0	E20-00H0	E20-50K0
E19-00H0	E19-50H0	E20-00K0	
E19-00J0	E19-50K0	E20-00M0	
E19-00K0	E20-00A0	E20-50H0	

Note: Part numbers with a leading 0 are functionally no different than without a leading 0 (ex.: 0E19-00A0 is the same switch as E19-00A0)










Actuator Specifications⁴

E19/G20 Series

Actuator		Max Operating Force g (lb)	Max Pre-Travel mm (in)	Operating Point ⁵ mm (in)	Min Over-Travel mm (in)	Max Movement Differential mm (in)	Actuation Length ⁶ mm (in)
A		850 (1.87)	1.27 (0.050)	7.24 ± 0.76 (0.285 ± 0.030)	2.03 (0.080)	0.38 (0.015)	N/A
H		205 (0.45)	6.99 (0.275)	7.92 ± 1.57 (0.312 ± 0.062)	4.75 (0.187)	2.36 (0.093)	38.10 (1.500)
H	High ratio 	130 (0.28)	10.16 (0.400)	7.14 ± 1.57 (0.281 ± 0.062)	4.75 (0.187)	3.56 (0.140)	44.45 (1.750)
J		850 (1.87)	1.27 (0.050)	17.02 ± 0.76 (0.670 ± 0.030)	2.30 (0.080)	0.38 (0.015)	N/A
K		212 (0.47)	6.35 (0.250)	18.24 ± 1.57 (0.718 ± 0.062)	4.75 (0.187)	2.36 (0.093)	35.33 (1.391)
K	High ratio 	150 (0.33)	7.92 (0.312)	17.45 ± 1.57 (0.687 ± 0.062)	4.75 (0.187)	3.56 (0.140)	41.78 (1.645)
M		850 (1.87)	1.27 (0.050)	20.62 ± 0.76 (0.812 ± 0.030)	5.54 (0.218)	0.38 (0.015)	N/A

E20 Series

Actuator		Max Operating Force g (lb)	Max Pre-Travel mm (in)	Operating Point ⁵ mm (in)	Min Over-Travel mm (in)	Max Movement Differential mm (in)	Actuation Length ⁶ mm (in)
A		1280 (2.82)	2.54 (0.100)	6.30 ± 0.76 (0.248 ± 0.030)	1.27 (0.050)	0.38 (0.015)	N/A
H		425 (0.94)	8.38 (0.330)	11.89 ± 1.57 (0.468 ± 0.062)	3.96 (0.156)	1.27 (0.050)	20.85 (0.821)
H	High ratio 	285 (0.63)	15.24 (0.600)	11.10 ± 1.57 (0.437 ± 0.062)	3.96 (0.156)	2.03 (0.080)	27.20 (1.071)
J		1280 (2.82)	2.54 (0.100)	6.30 ± 0.76 (0.248 ± 0.030)	1.27 (0.050)	0.38 (0.015)	N/A
K		425 (0.94)	8.84 (0.348)	21.84 ± 1.57 (0.860 ± 0.062)	3.96 (0.156)	1.14 (0.045)	17.48 (0.688)
K	High ratio 	312 (0.69)	13.34 (0.525)	21.03 ± 1.57 (0.828 ± 0.062)	3.71 (0.146)	1.91 (0.075)	22.91 (0.902)
M		1280 (2.82)	2.54 (0.100)	19.66 ± 0.76 (0.774 ± 0.030)	4.78 (0.188)	0.38 (0.015)	N/A

⁴Contact factory regarding combinations not shown

⁵Measured above reference line; refer to dimensional drawing below


⁶Actuator tolerances ± 0.791 mm (0.031"); E14 H and K actuators are shorter and formed up 11° at the button

Material Specifications

Case	General Purpose Phenolic
Actuating Button	Thermoplastic
Common Terminal	Copper Alloy
NO and NC Terminal	Copper Alloy (E13, G13) Copper (E14)
Moving Blade	Copper Alloy (E13, G13) Copper (E14)
Spring	Stainless Steel
Auxiliary Actuators	Cold-Rolled Steel (Nickel-Plated)
Roller	Sintered Stainless Steel
Contacts	Gold Crosspoint (G13) Silver Alloy (E13, E14)

Environmental Specifications

Temperature Rating	105 °C (221 °F) standard 150 °C (302 °F) available
Flammability Rating	UL94HB

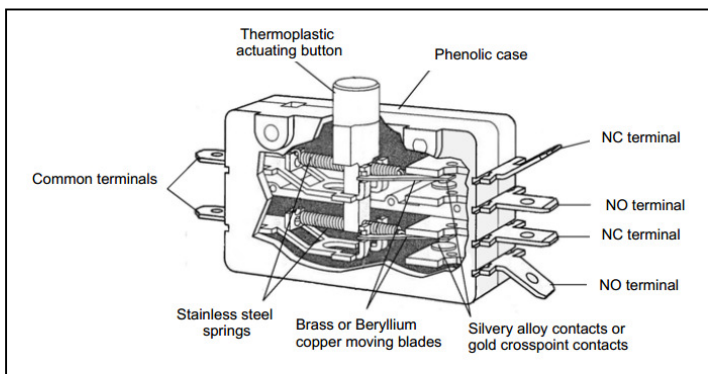

Dimensions – see page 3

Dimensions – mm (inches)

