



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Industrial PoE Managed Switches

EH7506/EH7508/EH7512 Series



Feature Highlights

- Up to 8 10/100 BASE-T(X) ports and 4 10/100/1000 BASE-T(X) Combo ports
- Up to 8 802.3af or 802.3at complaint PoE ports
- ERPS Ring (recovery time < 20ms @ 40 switches), STP/RSTP for network redundancy
- Remote management over Web browser, Telnet console, serial console, and Windows Utility
- CE/FCC/UL and NEMA TS-2 for Traffic control applications certified
- Profinet CC-B compatible, GSDML file provided

Product Description

The EH7512 Series is a highly reliable and fault-tolerant Industrial Managed PoE Ethernet Switch. It equips up to eight 10/100BASE-T(X) RJ-45 ports and up to four 10/100/1000BASE-T(X)/FX RJ-45 and SFP ports. With its high performance switching capacity, EH7512 Series provides network redundant self-recovery mechanism is less than 20ms on full load which allows you to scheme a reliable Ethernet network by building a redundant ring topology as your back-up solution. With a Multifunctional web dashboard, EH7512 Series offers intelligent features such as Quality of service (QoS), Virtual LAN (VLAN), IGMP, Port mirroring and security.

The EH7512 Series is designed for Industrial rugged applications. It equips a 5-pins terminal block to provide dual redundant power inputs with Reverse Polarity Protection and two sets of relay which allows field engineers to build up a stand-alone fault alarm system. Its IP30 housing protection, wide operating temperature of -20 to 70°C and DIN-Rail mounting capacities are liable to do most industrial filed applications.

General Specifications

Technology

Standards	IEEE802.3af / 802.3at for Power-over-Ethernet IEEE802.3 for 10BASE-T IEEE802.3u for 100BASE-T(X) and 100BASE-FX IEEE802.3ab for 1000BASE-T(X) IEEE802.3z for 1000BASE-X IEEE802.3x for Flow Control IEEE802.1D-2004 for Spanning Tree Protocol IEEE802.1w for Rapid STP IEEE802.1Q for VLAN Tagging IEEE802.1p for Class of Service IEEE8021X for Authentication IEEE802.3ad for Port Trunk with LACP
Protocols	IPv4, IPv6, IGMPv1/v2/v3, IGMP Snooping, GARP,GMRP, GVRP, SNMPv1/v2c/v3, SNMP Inform, ICMP, Telnet, SSH, DHCP Server/Relay/Client, DHCP Option 66/67/82, BootP, RARP, TFTP, NTP Server/Client, SNTP, SMTP, SMTP (Gmail), RMON, HTTP, HTTPS, Syslog, MRP (Client), LLDP, IEEE 1588 PTP V1/V2, IEEE 1588 Hardware Transparent Clock, 802.1x, EAP, RADIUS, TACACS+, Mirror port, QoS, ACL, Serial Console, U-Ring, STP, RSTP, MSTP, Redundancy Compatible Ring, Profinet, Ethernet/IP, Modbus/TCP
MIB	MIB II, IF-MIB, SNMPv2 MIB, BRIDGE-MIB, RMON MIB Group 1,2,3,9, RFC RFC 1157, RFC 1213, RFC 1215, RFC 1493, RFC 1643, RFC 1757, RFC 2011, RFC 2012, RFC 2013, RFC 2233, RFC 2571, RFC 2742, RFC 2819, RFC 2863, RFC 3411, RFC 3412, RFC 3413, RFC 3414, RFC 3415,
Flow Control	IEEE802.3x for Flow Control, back pressure flow control

Switch Properties

Priority Queues	8
Max. Number of Available VLANs	256
VLAN ID Range	VID 1 to 4094
Static IGMP Groups	256
Dynamic IGMP Groups	256
MAC Table Size	16K
Packet Buffer Size	12 Mbit

Interface

RJ45 Ports	10/100/1000BASE-T(X) or 10/100 BASE-T(X) auto negotiation speed
Fiber Ports	100BASE-FX / 1000BASE-X SFP slot
LED Indicators	PWR1, PWR2, Alarm, Run, Ring, Ring Master, RJ-45 Link/Speed, SFP Link, PoE
Console	RS232 (RJ45 connector)
Relay Output	2 relay outputs with current carrying capacity of 2A @30VDC
DIP Switches	Ring Control
Button	Reset Button

Power Management

Input Voltage	9-48 VDC or 18~30VAC for Non-PoE models 45-57 VDC for 802.3af mode 51-57 VDC for 802.3at mode
Input Current	Max. 1.5A @ 18VAC Max. 2.0A @ 9VDC (without PD) Max. 3.2A @ 45VDC (Support up to 8 ports at 15.4W per PoE port) Max. 5.5A @ 51VDC (Support up to 8 ports at 30W per PoE port)
Connector	Removable 5-pin Terminal Block for power input
Reverse Polarity Protection	Present (DC only)

Physical Characteristics


Housing	IP30 protection, metal housing
Dimension	60.3mm x 137.9mm x 164mm (W x D x H)
Weight	approx 1.2 kg (Max.)
Installation	DIN-Rail, Wall Mount (Optional Kit)

Environmental Limits

Operating Temperature	-20°C~70°C (-4°F~158°F)
Storage Temperature	-40°C~85°C (-40°F~185°F)
Ambient Relative Humidity	5%~95% non-condensing

Regulatory Approvals				
Safety	UL60950-1 2nd Ed. /CSA C22.2 No.60950-1-07 2nd Ed. / EN60950-1 / CB			
EMC	FCC Part 15, Subpart B, Class A / EN 61000-6-4:2007+A1:2011 / EN 61000-6-2:2005			
Test	Item	Value	Level	
IEC 61000-4-2	ESD	Contact Discharge	±6KV	3
		Air Discharge	±8KV	3
IEC 61000-4-3	RS	Radiated(Enclosure)	10 (V/m)	3
IEC 61000-4-4	EFT	AC Power Port	±2.0 KV	3
		DC Power Port	±2.0 KV	3
		Signal Port	±1.0 KV	3
IEC 61000-4-5	Surge	AC Power Port	Line-to-Line ±1.0KV	3
		AC Power Port	Line-to-Earth ±2.0KV	3
		DC Power Port	Line-to-Line ±1.0KV	3
		DC Power Port	Line-to-Earth ±2.0KV	3
		Signal Port	Line-to-Earth ±1.0KV	3
IEC 61000-4-6	CS	Conducted(Enclosure)	10 Vrms	3
IEC 61000-4-8	PFMF	(Enclosure)	30(A/m)	4
IEC 61000-4-11	Dip	AC Power Port	-	-
Shock	IEC 60068-2-27			
Drop	IEC 60068-2-32			
Vibration	IEC 60068-2-64			
Traffic Control	NEMA TS-2			
RoHS	Yes			
MTBF	11 years			
Warranty	5 years			

EH7506/EH7508/EH7512 mechanical dimensions (unit=mm)

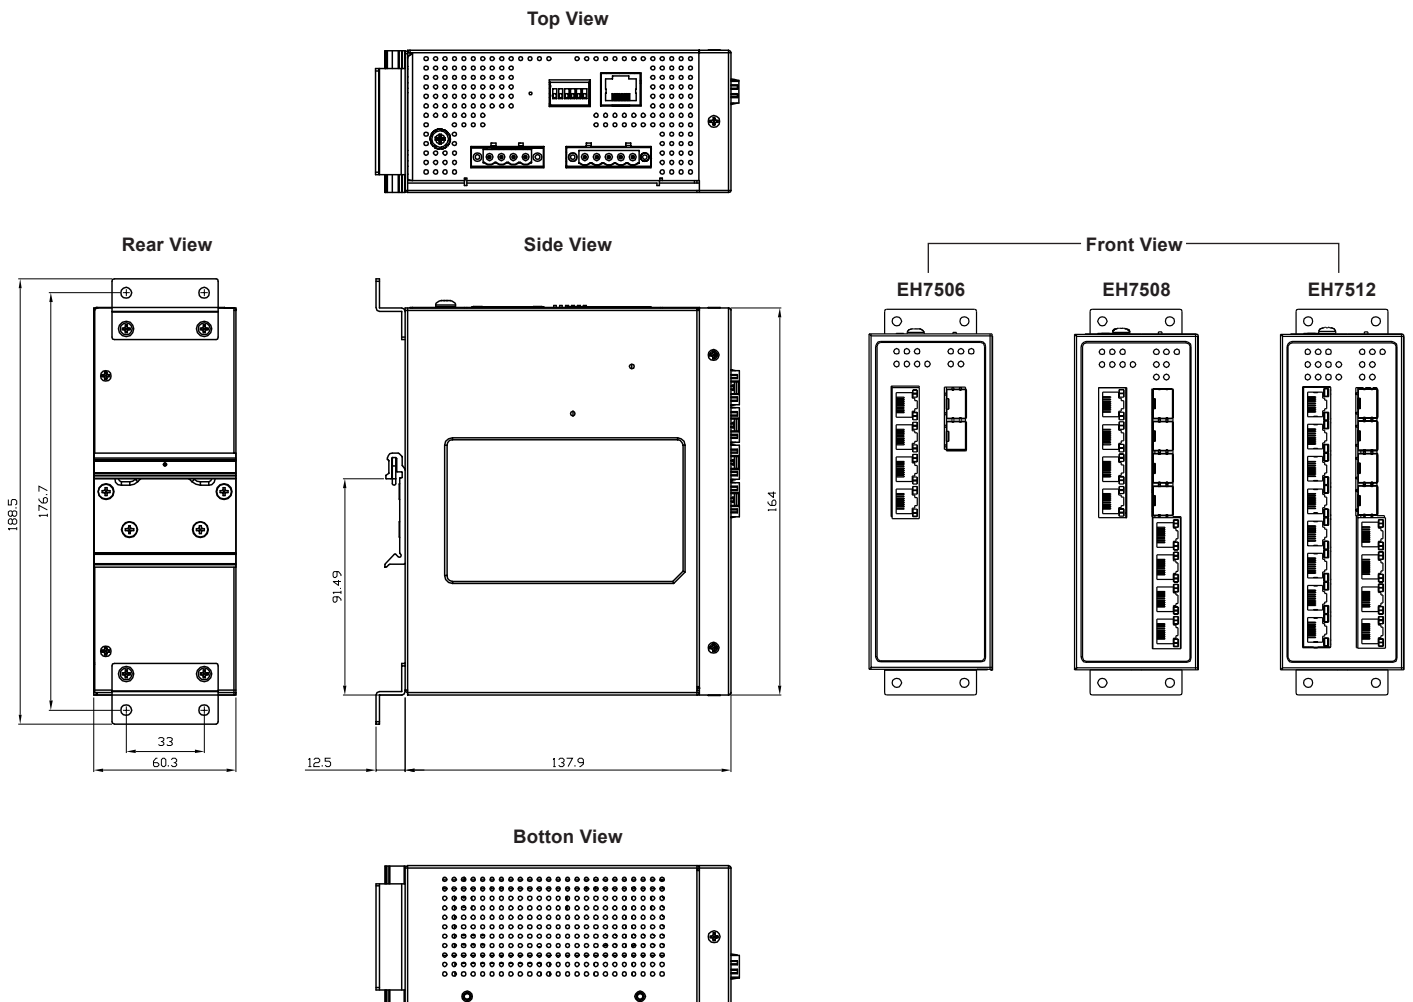

The illustrated pictures include optional wall mount kit.

Ordering Information					
Model Name		Port Interface			
Model	Part Number	Fast Ethernet		Gigabit Ethernet	
		Non-PoE	PoE	Combo Port	
				RJ-45	SFP
EH7506-2SFP	1P1EH750600002G	4	-	-	2
EH7506-4PoE-2SFP	1P1EH750600001G	-	4	-	2
EH7508-4G-4SFP	1P1EH750800002G	4	-	(4)	(4)
EH7508-4G-4PoE-4SFP	1P1EH750800001G	-	4	(4)	(4)
EH7512-4G-4SFP	1P1EH751200004G	8	-	(4)	(4)
EH7512-4G-4PoE-4SFP	1P1EH751200001G	4	4	(4)	(4)
EH7512-4G-8PoE-4SFP	1P1EH751200002G	-	8	(4)	(4)

Note: Numbers in the parenthesis are the Combo ports.

Optional Accessories	
WMK-450-Black	Metal Wall Mount Kit, Black
AD1120-48F	120W/2.5A DIN-Rail 48 VDC power supply with universal 100~240VAC/120-370VDC input
AD1240-48C	240W/5A DIN-Rail 48 VDC power supply with universal 100~240VAC/120-370VDC input
LM28-C3S-TI-N	SFP Transceiver, 1250Mbps, 850nmVCSEL, Multi-mode, 550m, 3.3V, -20~85°C
LM38-C3S-TI-N	SFP Transceiver, 1250Mbps, 1310nmFP, Multi-mode, 2km, 3.3V, -40~85°C
LS38-C3S-TI-N	SFP Transceiver, 1250Mbps, 1310nmFP, Single-mode, 10km, 3.3V, -40~85°C
LS38-C3L-TI-N	SFP Transceiver, 1250Mbps, 1310nmDFB, Single-mode, 30km, 3.3V, -40~85°C
CBL-RJ45(8P)-DB9(F)-90-C	8-pin RJ45 to DB9 Female Cross Over Cable, 90cm
LM38-A3S-TI-N	SFP Transceiver, 155Mbps, 1310nmLED, Multi-mode, 2km, 3.3V, -40~85°C
LS38-A3S-TI-N	SFP Transceiver, 155Mbps, 1310nmFP, Single-mode, 30km, 3.3V, -40~85°C

Note: Please choose a power supply wisely based on the actual power requirement. EH7512's system require 18W and each PoE port adds 15W for 802.3af or 30W for 802.3at.

Atop Technologies, Inc.

TEL : +886-3-5508137
 FAX : +886-3-5508131
 sales@atop.com.tw
 http://www.atop.com.tw