



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



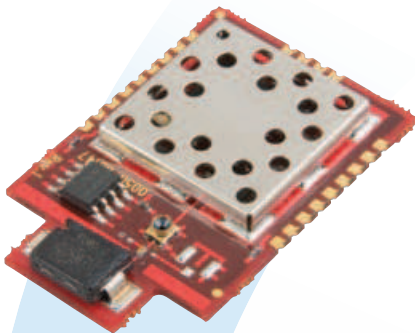

## THE FASTEST WAY TO WIRELESS

Based on Texas Instruments' leading edge 802.15.4 SoC & Z-Stack™ technology, the ZB2430 family of wireless modules is one of the most powerful ZigBee™-compliant solutions in the market today. It provides OEMs with industry-leading 2.4GHz module performance in low power conservation, ease of integration, range, features, and functionality.

ZB2430 is ideal for power-restricted or battery-operated applications. Its receive and power-down performance offer OEMs the lower power consumption of any comparable transceiver module. Since it operates in the 2.4 GHz ISM band, the modules can be used globally--allowing OEMs to standardize on a single platform. Although the IEEE 802.15.4 (PHY & MAC) and ZigBee stack are industry standards, our flexible approach allows OEMs to customize a solution specific to application requirements.

With the embedded Z-stack, ZB2430 is aimed squarely at secure, low-power mesh network applications. Modules are offered as Coordinators, Routers, End Devices or Commissioners. Network scan, remote configuration, dynamic routing, discovery, security...all unleash the full power of ZigBee. The Development Kit platform and test utility allow the OEM to explore the best of ZigBee straight out of the box.

## FEATURES

- Outstanding power consumption
- Reliable ZigBee™ mesh architecture
- 2.4GHz ISM band for global applications
- Temperature sensor
- Long-range performance
- Configurable GPIO, ADC
- Over-the-air download (OAD) firmware updating capability

## APPLICATIONS

- Automated meter reading
- Irrigation systems
- Medical devices
- ePOS

**global solutions: local support.™**

USA: +1 800 492.2320

Europe: +44 1628 858 940

Asia: +852 2268 6567

wirelessinfo@lairdtech.com

[www.lairdtech.com/wireless](http://www.lairdtech.com/wireless)

ZB2430 supports ZigBee's MESH architecture. Each system consists of a Coordinator, Router, Commissioner and optional End Devices.

## COORDINATOR

- One coordinator per network
- Scans to find available channel
- Establishes a network
- Maintains routing tables
- Communicates with any device type

## ROUTER

- Maintains routing tables
- Communicates with any device type
- Extends range of network by routing data over multiple hops

## END DEVICE

- Communicates with any device type
- Supports sleep modes
- Dedicated to parent (Router or Coordinator)

## COMMISSIONER

- One Commissioner per network
- Server module for OAD firmware upgrades
- Required for OAD ability

## ORDERING INFORMATION

<b>Coordinator</b>	Z100S1*FC
<b>Router</b>	Z100S1*FR
<b>End Device</b>	Z100S1*FE
<b>Commissioner</b>	Z100S1*FM
<b>Coordinator</b>	Z040S1*FC
<b>Router</b>	Z040S1*FR
<b>End Device</b>	Z040S1*FE
<b>Commissioner</b>	Z040S1*FM


\* = A for integrated antenna; U for u.FL connector (external antenna)

Parameter	Z100S1*	Z040S1*
<b>Form Factor</b>	Surface Mount	Surface Mount
<b>Output Power</b>	100mW	40mW
<b>Frequency</b>	2400-2483.5 MHz	2400-2483.5 MHz
<b>Outdoor Range</b>	4.8 km (ext antenna)	1.6 km (ext antenna)
<b>Indoor Range</b>	400m	160m
<b>Receive Sensitivity</b>	-100 dB typical	-100 dB typical
<b>Serial Data Rate</b>	Up to 115 bps	Up to 115 bps
<b>RF Baud Rate</b>	250 kbps	250 kbps
<b>Temperature Range</b>	-40° C to +85° C	-40° C to +85° C
<b>Size</b>	25.4mm x 39 mm x 3.6 mm	25.4mm x 39 mm x 3.6 mm
<b>Serial Interface</b>	3V TTL	3V TTL
<b>Power Consumption:</b>		
<b>Tx</b>	140mA@ 3.3V +18dBm	95mA@ 3.3V +14dBm
<b>Rx</b>	44mA @ 3.3V	30mA @ 3.3V
<b>Sleep</b>	7.6 uA	7.6 uA
<b>Antenna Options</b>	Integrated 2dBi ceramic antenna, u.FL connector for external antenna	Integrated 2dBi ceramic antenna, u.FL connector for external antenna
<b>Approvals*</b>	FCC/IC	CE

\*for additional country approvals, contact us for more information.

<b>Development Kit – External antenna</b>	SDK-Z100S1UF
<b>Development Kit - Integrated antenna</b>	SDK-Z100S1AF
<b>Development Kit – External antenna, CE</b>	SDK-Z040S1UF
<b>Development Kit - Integrated antenna, CE</b>	SDK-Z040S1AF
<b>Development Kit – External antenna OAD</b>	SDK-Z100S1UF-M
<b>Development Kit - Integrated antenna OAD</b>	SDK-Z100S1AF-M
<b>Development Kit – External antenna, CE, OAD</b>	SDK-Z040S1UF-M
<b>Development Kit - Integrated antenna, CE, OAD</b>	SDK-Z040S1AF-M

Development Kit include one Coordinator module, two router modules and two end devices.



LWS-SPEC-ZB2430 0209

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. For further information please visit our website at [www.lairdtech.com](http://www.lairdtech.com). Alternatively contact: [wirelessinfo@lairdtech.com](mailto:wirelessinfo@lairdtech.com). Bluetooth® is a trademark owned by Bluetooth SIG, Inc., USA and licensed to Laird Technologies.

© 2009 All Rights Reserved. Laird Technologies is a registered trademark of Laird Technologies, Inc.