



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fluke Building Diagnostic Thermal Imagers

Models: TiR32, TiR29 and TiR27.
Three models specifically for buildings applications.

Technical Data

P3
Series

Proven
Practical
Performance

The P3 Series: Superior, not Superfluous. Fluke is how other tools are measured.



TiR27
• 240x180 IR resolution
• 43,200 total IR pixels

TiR29
• 280x210 IR resolution
• 58,800 total IR pixels

TiR32
• 320x240 IR resolution
• 76,800 total IR pixels

The greatest technological advancement in thermography may be how Fluke has made it so simple to capture images and analyze data right out of the box.

Superior image quality

Industry-leading thermal sensitivity and spatial resolution combined with a high definition display, creates the sharpest images in the industry.

One-handed, easy-to-use interface

With just a push of your thumb, go from one-handed manual smart focus to adding picture-in-picture and even add voice comments.

Torture tested™

Before a Fluke goes into your hands, we drop it from ours. Only Fluke thermal imagers are designed from the inside out to withstand a 6.5 ft drop.

Patented Fluke IR-Fusion®

(Picture-in-picture and auto blending)
Precision visible and IR image alignment allows Fluke to offer the only on-camera blended infrared and visible image to better diagnose issues.

Interchangeable lenses

Interchangeable wide-angle and IR-Fusion compatible telephoto lenses to cover any application.

Fluke. Not just infrared, infrared you can use.®



Building Diagnostics
Building problems, defects and general maintenance.



Green Energy
Energy audit, building inspection and weatherization.



Moisture Detection
Restoration, water damage and roofing.

IR-Fusion®


Patented Fluke IR-Fusion® Technology

More than picture in picture

Infrared images alone can be difficult to understand, which is why Fluke pioneered IR-Fusion, a revolutionary marriage of visible and infrared images never before seen in commercial or industrial thermal imagers. Automatically capturing a visible image with every infrared image allows to you always know exactly what you're looking at.

Not all fusion is created equal

Don't be fooled by imitators. No other manufacturer can boast on-camera blending. Compare the images. Only Fluke has mastered the ability to create the industry's only transparent, perfectly blended and aligned visible and infrared images.

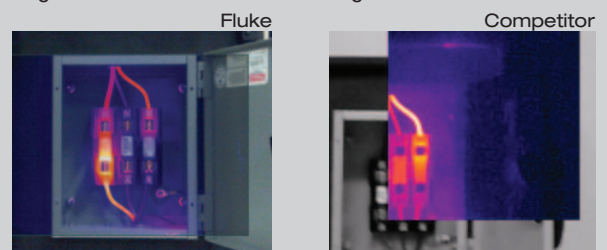

Detailed specifications

	TiR32	TiR29	TiR27
Temperature			
Temperature measurement range (not calibrated below -10 °C)	-20 °C to +150 °C (-4 °F to +302 °F)		
Temperature measurement accuracy	± 2 °C or 2 % (at 25 °C nominal, whichever is greater)		
On-screen emissivity correction	Yes		
On-screen reflected background temperature compensation	Yes		
On-screen transmission correction	Yes		
Imaging performance			
Image capture frequency	9 Hz refresh rate or 60 Hz refresh rate depending upon model variation		
Detector type	Focal Plane Array, uncooled microbolometer, 320 x 240 pixels	Focal Plan Array, uncooled microbolometer, 280 x 210 pixels	Focal Plan Array, uncooled microbolometer, 240 x 180 pixels
Thermal sensitivity (NETD)	≤ 0.04 °C at 30 °C target temp. (40 mK) ≤ 0.045 °C at 30 °C target temp. (45 mK)		
Total pixels	76,800	58,800	43,200
Infrared spectral band	7.5 µm to 14 µm (long wave)		
Visual (visible light) camera	Industrial performance 2.0 megapixel		
Minimum focus distance	45 cm (approx. 18 in)		
Standard infrared lens type			
Field of view	23 ° x 17 °		
Spatial resolution (IFOV)	1.25 mRad	1.43 mRad	1.67 mRad
Minimum focus distance	15 cm (approx. 6 in)		
Optional telephoto infrared lens type			
Field of view	11.5 ° x 8.7 °		
Spatial resolution (IFOV)	0.63 mRad	0.72 mRad	0.84 mRad
Minimum focus distance	45 cm (approx. 18 in)		
Optional wide-angle infrared lens type			
Field of view	46 ° x 34 °		
Spatial resolution (IFOV)	2.50 mRad	2.86 mRad	3.34 mRad
Minimum focus distance	7.5 cm (approx. 3 in)		
Focus mechanism	Manual, one-handed Smart Focus capability		
Image presentation			
Palettes			
Standard	Ironbow, Blue-Red, High Contrast, Amber, Amber Inverted, Hot Metal, Grayscale, Grayscale Inverted		
Ultra Contrast™	Ironbow Ultra, Blue-Red Ultra, High Contrast Ultra, Amber Ultra, Amber Inverted Ultra, Hot Metal Ultra, Grayscale Ultra, Grayscale Inverted Ultra		
Level and span	Smooth auto-scaling and manual scaling of level and span		
Fast auto toggle between manual and auto modes	Yes		
Fast auto-rescale in manual mode	Yes		
Minimum span (in manual mode)	2.0 °C (3.6 °F)		
Minimum span (in auto mode)	3.0 °C (5.4 °F)		
IR-Fusion® information			
Automatically aligned (parallax corrected) visual and IR blending	Yes		
Picture-In-Picture (PIP)	Three levels of on-screen IR blending displayed in center of LCD		
Full screen infrared	Three levels of on-screen IR blending displayed on LCD		
Color alarms (temperature alarms)	Dewpoint temperature alarm (user-selectable)		
Voice annotation	60 seconds maximum recording time per image; reviewable playback on imager		
Image capture and data storage			
	The TiR32, TiR29 and Ti27 allows the user to adjust palette, blending, level, span, IR-Fusion® mode, emissivity, and reflected background temperature compensation, and transmission correction on a captured image before it is stored.		
Image capture, review, save mechanism	One-handed image capture, review, and save capability		
Storage medium	SD Memory Card (2 GB memory card will store at least 1200 fully radiometric (.is2) IR and linked visual images each with 60 seconds voice annotations, or 3000 basic bitmap (.bmp) images, or 3000 jpeg (.jpeg) images; transferrable to PC via included multi-format USB card reader		
File formats	Non-radiometric (.bmp) or (.jpeg) or fully-radiometric (.is2)		
	No analysis software required for non-radiometric (.bmp and .jpeg) files		
Export file formats w/SmartView® software	BMP, DIB, GIF, JPE, JFIF, JPEG, JPG, PNG, TIF, and TIFF		
Memory review	Thumbnail view navigation and review selection		

General specifications

Operating temperature	-10 °C to +50 °C (14 °F to 122 °F)
Storage temperature	-20 °C to +50 °C (-4 °F to 122 °F) without batteries
Relative humidity	10 % to 95 % non-condensing
Display	9.1 cm (3.7 in) diagonal landscape color VGA (640 x 480) LCD with backlight and clear protective cover
Controls and adjustments	User selectable temperature scale (°C/°F) Language selection Time/Date set Emissivity selection Reflected background temperature compensation Transmission correction User selectable hot spot and cold spot, and center point on the image (other custom markers and shapes in SmartView® software) Dewpoint temperature alarm User selectable backlight: "Full Bright" or "Auto" Information display preference
Software	SmartView® full analysis and reporting software included
Batteries	Two lithium ion rechargeable smart battery packs with five-segment LED display to show charge level
Battery life	Four+ hours continuous use per battery pack (assumes 50 % brightness of LCD)
Battery charge time	2.5 hours to full charge
AC battery charging	Two-bay ac battery charger (110 V ac to 220 V ac, 50/60 Hz) (included), or in-imager charging. AC mains adapters included. Optional 12 V automotive charging adapter.
AC operation	AC operation with included power supply (110 V ac to 220 V ac, 50/60 Hz). AC mains adapters included.
Power saving	Sleep mode activated after five minutes of inactivity, automatic power off after 30 minutes of inactivity
Safety standards	CSA (US and CAN): C22.2 No. 61010-1-04, UL: UL STD 61010-1 (2nd Edition), ISA: 82.02.01
Electromagnetic compatibility	Meets all applicable requirements in EN61326-1:2006
C Tick	IEC/EN 61326-1
US FCC	CFR 47, Part 15 Class B
Vibration	0.03 g2/Hz (3.8 grms), IEC 68-2-6
Shock	25 g, IEC 68-2-29
Drop	2 meter (6.5 feet) with standard lens
Size (H x W x L)	27.7 cm x 12.2 cm x 17.0 cm (10.9 in x 4.8 in x 6.7 in)
Weight (battery included)	1.05 kg (2.3 lb)
Enclosure rating	IP54 (protected against dust, limited ingress; protection against water spray from all directions)
Warranty	Two-years (standard). Extended warranties also available.
Recommended calibration cycle	Two-years (assumes normal operation and normal aging)
Supported Languages	Czech, English, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, and Turkish

Ordering information

- FLK-TiR32 9 Hz** Building Diagnostics Thermal Imager, 9 Hz
- FLK-TiR32 60 Hz** Building Diagnostics Thermal Imager, 60 Hz
- FLK-TiR29 9 Hz** Building Diagnostics Thermal Imager, 9 Hz
- FLK-TiR29 60 Hz** Building Diagnostics Thermal Imager, 60 Hz
- FLK-TiR27 9 Hz** Building Diagnostics Thermal Imager, 9 Hz
- FLK-TiR27 60 Hz** Building Diagnostics Thermal Imager, 60 Hz

Included

Thermal imager with standard infrared lens; ac power supply and battery pack charger (including mains adapters); two, rugged lithium ion smart battery packs; SD memory card; multi-format USB memory card reader for downloading images into your computer; SmartView® software with free software upgrades for life; rugged, hard carrying case; soft transport bag; adjustable hand strap; printed users manual; warranty registration card.

Optional accessories

- FLK-LENS/TELE1** Telephoto Infrared Lens
- FLK-LENS/WIDE1** Wide-angle Infrared Lens
- TI-CAR-CHARGER** Thermal Imager Vehicle Charger
- TI-VISOR** Thermal Imager Visor
- BOOK-ITP** Introduction to Thermography Principles Book
- TI-TRIPOD** Tripod Mounting Base Accessory



Fluke. *Not just infrared.
Infrared you can use.™*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:
In the U.S.A. (800) 443-5853 or
Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40 2675 200 or
Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or
Fax (905) 890-6866
From other countries +1 (425) 446-5500 or
Fax +1 (425) 446-5116
Web access: <http://www.fluke.com>

©2011 Fluke Corporation.
Specifications subject to change without notice.
Printed in U.S.A. 3/2011 4008153A D-EN-N

**Modification of this document is not permitted
without written permission from Fluke Corporation.**