



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FLUKE®

The Fluke 66 and 68 Infrared Thermometers

Non-contact temperature measurement

Technical Data

The professional's diagnostic tool

The Fluke 66 and Fluke 68 non-contact thermometers are the ideal professional diagnostic tools for HVAC technicians performing room balance checks, electricians evaluating electrical connections and auto mechanics diagnosing catalytic converters. This handheld portable tool enables professionals to research heating and ventilation problems, monitor the status of electrical motors and electrical panels and diagnose car malfunctions with ease. They measure surface temperatures, helping to quickly locate potential blockages or malfunctioning systems reducing work time and improving performance.

The 60 series thermometers feature:

- Laser guided sighting system for easy targeting with 1 % accuracy.
- 12-point data logging.
- Advanced optics to measure smaller targets at greater distances.
- Adjustable emissivity for more accurate temperature measurements.
- Selectable MAX, MIN, DIF and AVG functions that display values instantly with Hi/Lo Alarm.
- Temperatures up to 760 °C (1400 °F) (68, 68IS).
- Intrinsically Safe model available (68IS).*

Optical resolution

The laser sighting system guides measurements to the right target and indicates the approximate center of the measurement area.

(D:S = distance to spot using 90 % encircled energy at focal point).

The 68IS* model is available for the noncontact temperature monitoring needs of potentially explosive or flammable environments.


*Approved by Factory Mutual Research, a USA organization, for use in hazardous locations. The 68IS approval does not apply to atmosphere containing coal dust, grain dust, metal dust or fibers. Check your national and company regulations to determine if this approval is appropriate for your situation.




Specifications

	Fluke 66	Fluke 68/68IS*
Temperature range	-32 to 600 °C (-25 to 1100 °F)	-32 to 760 °C (-25 to 1400 °F)
Accuracy (assumes ambient operating temperature of 23 °C [73 °F])	-32 to -26 °C (-25 to -15 °F): ±3 °C (±5 °F) -26 to -18 °C (-15 to 0 °F): ±2.5 °C (±4 °F) -18 to 23 °C (0 to 73 °F): ±2 °C (±3 °F) For targets above 23 °C (73 °F): ±1 % or reading or ±1 °C (±2 °F), whichever is greater	
Repeatability	±0.5 % or ≤ ±1 °C (±2 °F), whichever is greater	
Response time	≤ 0.5 second (95 % of reading)	
Spectral response	8 to 14 μm	
Emissivity	Digitally adjustable emissivity (from 0.1 to 1.0 by 0.01)	
Ambient operating temp.	0 to 50 °C (32 to 120 °F)	
Relative humidity	10 to 90 % RH non-condensing, at <30 °C (86 °F) ambient	
Storage temperature	-20 to 60 °C (-13 to 158 °F) without battery	
Dimensions	200 x 160 x 55 mm (8 x 6 x 2 in.)	
Weight	320 g (11 oz.)	
Power	9 V alkaline or NiCd battery	
Batter life (alkaline)	20 hours with laser and backlight on 50 % 40 hours with laser and backlight off	
Laser sighting (Class II)	Offset single point laser point	
Typical distance to target	5 m (15 ft.)	8 m (25 ft.)
Distance to Spot (D:S)	30:1 at focus point	50:1 at focus point
MIN, MAX, AVG, DIF Temperature display	•	
Data logging	12 points	
Probe jack	•	
Display hold (7 seconds)	•	
Hi/Low alarm	•	
LCD backlight	•	
Temperature display	°C or °F selectable	
Display resolution	0.1 °C (0.1 °F)	
Hard carrying case	•	
Locking trigger	•	
Tripod mounting	6.35 mm (.25 in.) 20 UNC threading	
Warranty	2 years, conditional	

* Approved by Factory Mutual Research for use in hazardous locations.

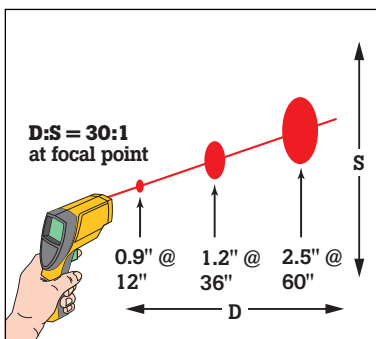

Use the Fluke 66 within 5 m (15 ft.) of the intended target. At greater distances, the measured area will be larger (approximately the distance divided by 30).

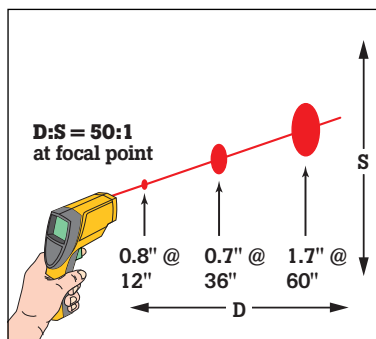

Use the Fluke 68 and 68IS within 8 m (25 ft.) of the intended target. At greater distances, the measured area will be larger (approximately the distance divided by 50).

Ordering information

Fluke 66 Infrared Thermometer
Fluke 68 Infrared Thermometer
Fluke 68IS Infrared Thermometer

Included



Optional accessories:

- RTD temperature probe (standard w/68IS) 32 °C to 260 °C (-25 °F to 500 °F)
- Non-contact thermometer holster



*Included w/68IS

Standard Feature (68IS only)

- Factory Mutual Research Intrinsically Safe approval, including probe (Intrinsically safe, Class I Division 1 Groups A, B, C, D Class I, Zone 0, AEx ia IIC, T4 at 50 °C when used with 9V alkaline battery.) Groups A, B, C, D refers to: Acetylene, Hydrogen, Ethylene and Propane.

Fluke. Keeping your world up and running.

Fluke Corporation

PO Box 9090, Everett, WA USA 98206

Fluke Europe B.V.

PO Box 1186, 5602 BD

Eindhoven, The Netherlands

For more information call:

In the U.S.A. (800) 443-5853 or Fax (425) 446-5116

In Europe/M-East/Africa +31 (40) 2 675 200 or Fax +31 (40) 2 675 222

In Canada (800) 36-FLUKE or Fax (905) 890-6866

From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116

Web access: <http://www.fluke.com>

©2005 Fluke Corporation. All rights reserved.

Printed in U.S.A. 6/2005 2153543 D-US-N Rev C