



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



G3VM-61BR/ER


MOS FET Relays

New Analog-switching MOS FET Relays Featuring a High Capacity of 2.5 A.



- Switches minute analog signals.
- Low ON-resistance of 0.1 Ω max.
- Continuous load current of 2.5 A.

RoHS compliant

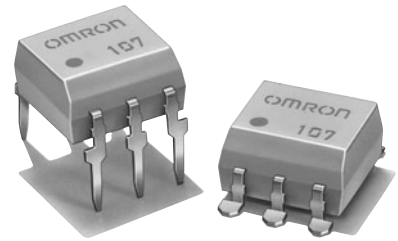


Note: The actual product is marked differently from the image shown here.

Application Examples

- Test & Measurement equipment
- Security equipment

Terminal Arrangement/Internal Connections

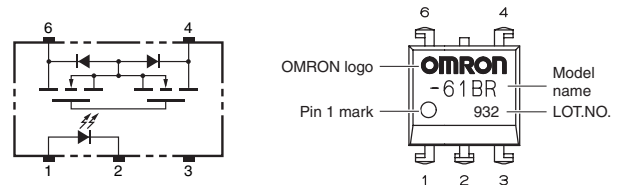

Note: The actual product is marked differently from the image shown here.

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
DIP6	1a (SPST-NO)	PCB Terminals	60 V	G3VM-61BR	50	-
		Surface-mounting Terminals		G3VM-61ER		
				G3VM-61ER(TR)	-	1,500

* The AC peak and DC value are given for the load voltage.

Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I _F	30	mA	
	LED forward current reduction rate	$\Delta I_F / ^\circ C$	-0.3	mA/ $^\circ C$	Ta \geq 25°C
	LED reverse voltage	V _R	5	V	
	Connection temperature	T _J	125	$^\circ C$	
Output	Load voltage (AC peak/DC)	V _{OFF}	60	V	
	Continuous load current (AC peak/DC)	I _O	2500	mA	
	ON current reduction rate	$\Delta I_O / ^\circ C$	-22	mA/ $^\circ C$	Ta \geq 40°C
	Connection temperature	T _J	125	$^\circ C$	
Dielectric strength between I/O (See note 1.)		V _{I-O}	2500	V _{rms}	AC for 1 min
Ambient operating temperature		T _a	-20 to +85	$^\circ C$	With no icing or condensation
Ambient storage temperature		T _{stg}	-40 to +125	$^\circ C$	With no icing or condensation
Soldering temperature		-	260	$^\circ C$	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V _F	1.18	1.33	1.48	V	I _F = 10 mA
	Reverse current	I _R	-	-	10	μA	V _R = 5 V
	Capacity between terminals	C _T	-	70	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current	I _{FT}	-	1.0	3	mA	I _O = 1 A
Output	Maximum resistance with output ON		-	0.065	0.1	Ω	I _F = 10 mA, I _O = 2 A, t = 10 ms
	Current leakage when the relay is open	I _{LEAK}	-	1.0	10	nA	V _{OFF} = 60 V
	Capacity between terminals	C _{OFF}	-	400	600	pF	V = 0, f = 1 MHz
	Capacity between I/O terminals	C _{I-O}	-	0.8	-	pF	f = 1 MHz, V _s = 0 V
Insulation resistance between I/O terminals		R _{I-O}	1000	-	-	M Ω	V _{I-O} = 500 VDC, RoH \leq 60%
Turn-ON time		t _{ON}	-	1.0	1.5	ms	I _F = 10 mA, R _L = 200 Ω , V _{DD} = 20 V (See note 2.)
Turn-OFF time		t _{OFF}	-	0.2	0.4	ms	

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V _{DD}	-	-	48	V
Operating LED forward current	I _F	10	-	20	mA
Continuous load current (AC peak/DC)	I _O	-	-	2500	mA
Ambient operating temperature	T _a	25	-	60	°C

Engineering Data


LED forward current vs. Ambient temperature

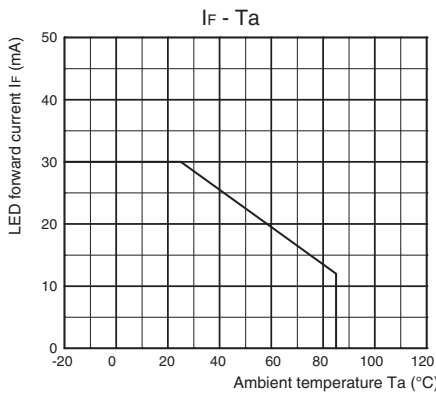


Continuous load current vs. Ambient temperature

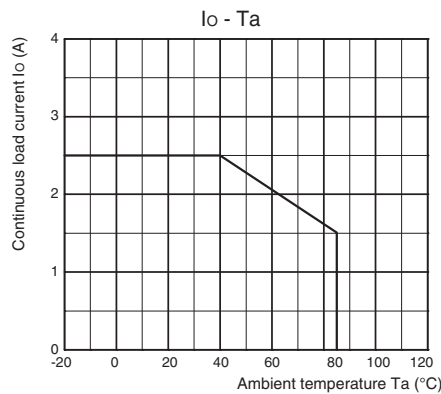


LED forward current vs. LED forward voltage

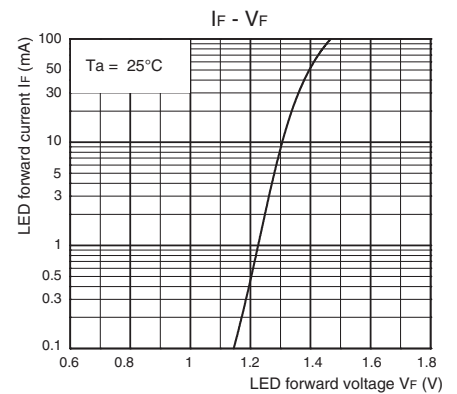


Continuous load current vs. On-state voltage

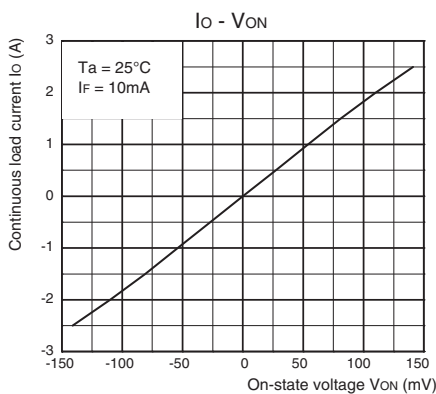


On-state resistance vs. Ambient temperature

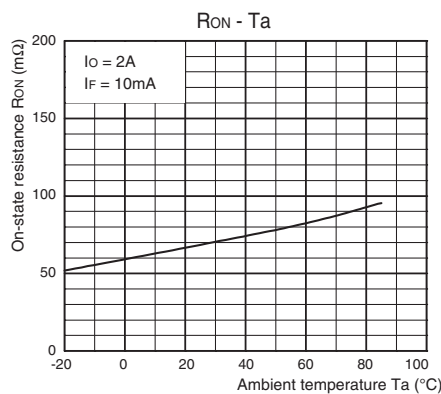


Trigger LED forward current vs. Ambient temperature

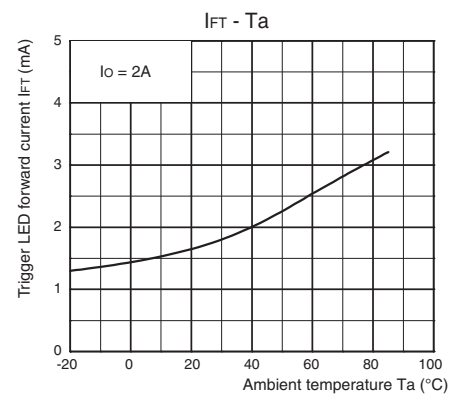


Turn ON, Turn OFF time vs. LED forward current

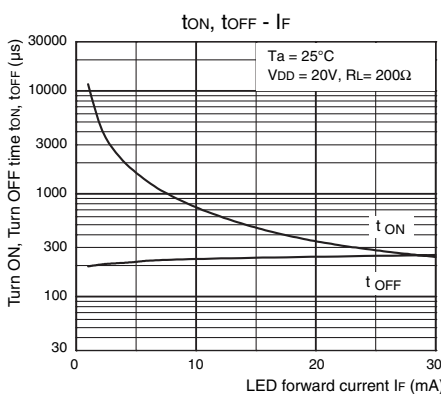

Turn ON, Turn OFF time vs. Ambient temperature

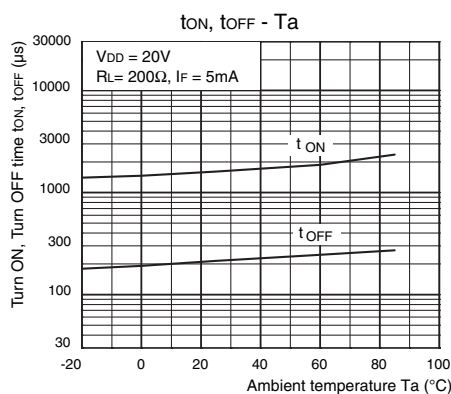

Current leakage vs. Ambient temperature

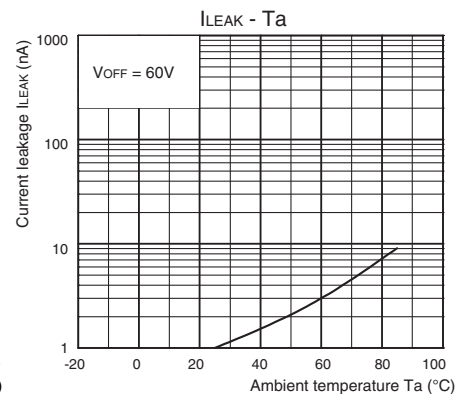


Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance

DIP (Dual Inline Package)


DIP6 (special)

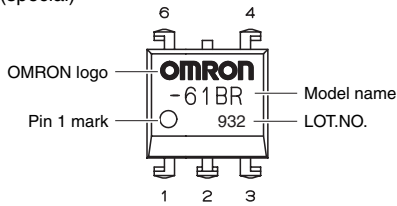

Note: The actual product is marked differently from the image shown here.



■ Dimensions

(Unit:mm)





PCB Terminals

Weight: 0.4 g

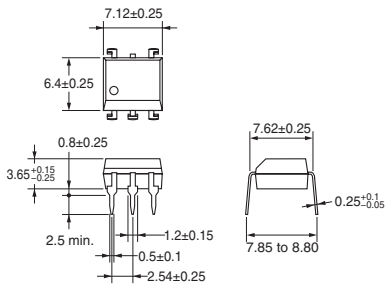


Surface-mounting Terminals PCB Dimensions (BOTTOM VIEW)

Weight: 0.4 g

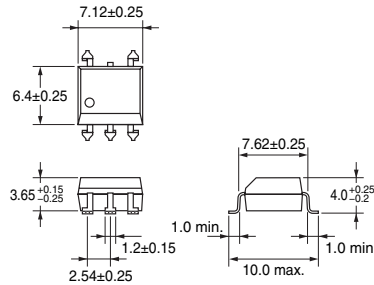

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. **K175-E1-01**
0412(0412)(O)