



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



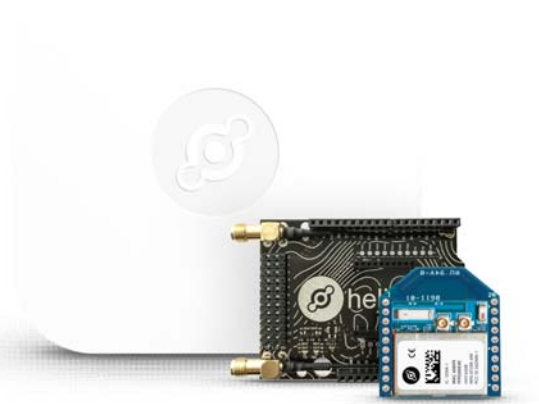

# Helium Starter Kit - Cellular

Choose your hardware adapter (Arduino/mbed, Raspberry Pi, USB) to get started.

## Product Details

Helium Starter Kits include everything you need to easily give your embedded devices secure, long-range connectivity.

Included Hardware:

1 x Helium Element Access Point with Cellular Connectivity

1 x Helium Atom Prototyping Module (US Model)

1 x Hardware Adapter (Arduino/mbed, Raspberry Pi, or USB)

Note about US Model Hardware: Helium ships our prototyping kits worldwide, however cellular connectivity and radio bands may not work in all countries.

# About the Helium Atom Prototyping Module

The Helium Atom Prototyping Module is the prototyping version of our secure, low-power, dual-band wireless module. The pin layout is compatible with many existing embedded devices, including Raspberry Pi, Arduino, and mbed.

Atom devices connect to the nearest Element out of the box using Helium's wireless technology that allows devices to communicate long distances with little interference and requiring no device-level configuration. Each element can support multiple atoms. Some embedded devices some may require an additional adapter, contact us at [human@helium.com](mailto:human@helium.com) if you have any questions before purchasing.

## Technical Specifications

<b>Networking Standards</b>	IEEE 802.15.4
<b>Wireless Connectivity</b>	802.15.4 IEEE Standard on dual-band radios  915 MHz & 2.4 GHz (US) 868 MHz & 2.4GHz (EU)
<b>Security</b>	Hardware-based encryption, authentication, and authorization
<b>Environmental Range</b>	Operating Temperature -40° to 185°F (-40° to 85°C)
<b>Product Dimensions</b>	Atom:  Length: 1.06" (27mm) Width: 1.1" (28mm)
<b>Certifications</b>	FCC ID: 2ADMK-1 IC ID: 12590A-1
<b>Voltage Range</b>	2.0 to 3.6V (3.3V typical; 2.4V recommended minimum for full TX power at 915MHz)

# About the Helium Element Access Point

Atom devices connect out of the box to the nearest Element. Helium's wireless technology allows devices to communicate long distances with little interference, requires no device-level configuration, and each Element can support thousands of Atom devices. This means you may only need one Element to cover an entire office building, two for a manufacturing facility, or three for a multi-acre farm.

The Element wirelessly connects to the Helium Routing Infrastructure anywhere there is cellular service, allowing for zero-configuration deployment for various applications and data is securely routed to any cloud platform of your choice.

## Technical Specifications

<b>Networking Standards</b>	IEEE 802.15.4
<b>Wireless Connectivity</b>	802.15.4 IEEE Standard on dual-band radios  915 MHz & 2.4 GHz (US) 868 MHz & 2.4GHz (EU)
<b>Security</b>	Hardware-based encryption, authentication, and authorization
<b>Environmental Range</b>	Operating Temperature -40° to 185°F (-40° to 85°C)
<b>Product Dimensions</b>	Element:  Length: 4.13" (105mm) Width: 4.3" (28mm) Height: 1.57" (40mm)
<b>Certifications</b>	FCC ID: 2ADMK-1 IC ID: 12590A-1
<b>Voltage Range</b>	2.0 to 3.6V (3.3V typical; 2.4V recommended minimum for full TX power at 915MHz)