



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HFBR-3810Z & HFBR-3810MSZ

650 nm Fiber Optics Link for DC to 10Mbaud



Data Sheet



Description

HFBR-3810Z consists of an optic transmitter and receiver operating at 650nm wavelength. The pin to pin air gap distance of 25.1mm provides transient voltage suppression of 12kV.

Applications

- Drives/Inverters
- Galvanic isolation on one single PCB

Features

- Data transmission at signal rates of DC to 10MBaud
- DC coupled receiver with CMOS/TTL output for easy designs: no data encoding or digitizing circuitry required
- High noise immunity
- RoHS compliant
- Transient voltage suppression of up to 12kV according IEC 60664-1
- Laser class 1 according to IEC-60825: Amendment 2001

HFBR-3810Z & HFBR-3810MSZ DC to 10MBaud Data Link

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Signaling Rate	f_s	DC	10	Mbd
Storage and Operating Temperature	$T_{S,O}$	-40	+85	°C
Receiver supply voltage	V_{CC}	-0.5	+5.5	V
Receiver Average Output Current	$I_{O,AVG}$	-16	16	mA
Receiver Output Power Dissipation	P_{OD}		80	mW
Transmitter Peak Forward Input Current ^[1]	$I_{F,PK}$		90	mA
Transmitter Reverse Input Voltage	V_R		3	V
Rated impulse voltage ^[2]	V_T		12	kV
Lead Soldering Cycle ^[3, 4]	Temp	T_{SOL}	+260	°C
	Time		10	Sec
Nominal Voltage of the supply system ^[2]	V_{eff}		1000	V

Notes:

- For $I_{F,PK} > 60\text{mA}$, the duty cycle factor must maintain $I_{F,AV} \leq 60\text{mA}$ and pulse width $\leq 1\mu\text{s}$
- [IEC 60664-1] Overvoltage category 4; inhomogeneous field; pollution degree 3; material group 2; altitude up to 2000m for HFBR-3810MSZ and up to 3000m for HFBR-3810Z above sea level
- 1.6mm below seating plane; wave soldering only
- MSL class 3

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Units
Ambient Temperature	T_A	-40	85	°C
Power Supply Voltage ^[1]	V_{CC}	4.75	5.25	V
Transmitter Peak Forward Current ^[2]	$I_{F,P}$	54	90	mA
Transmitter Average Forward Current ^[2]	$I_{F,AV}$		60	mA

Note:

- <100m_{p-p} Noise
- Current applied at the transmitter must not exceed 50μA in order to guarantee a logical "1" at the RX output

Mechanical Dimensions

Parameter	Symbol	HFBR 3810Z	HFBR 3810MSZ	Unit
Clearance	d_C	25.1	20.1	mm
Creepage	d_{CP}	28.7	23.1	mm
Clearance Internal ^[1]	d_{CI}	21.1	21.1	mm
Creepage Internal ^[1]	d_{CPI}	25.1	25.1	mm

Notes:

- Only air gap with non conductive mold the distance is 24.6mm.
- CTI value of the housing material is 600.

All the data in this specification refers to the operating conditions above and over lifetime unless otherwise stated.

ATTENTION: Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Input Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Forward Voltage ^[1]	V _F	1.8	2.1	2.65	V
Forward Voltage Temperature Coefficient	$\Delta V_F / \Delta T$		-1.8		mV/°C
Reverse Input Breakdown Voltage ^[2]	V _{BR}	3.0	13		V
Diode Capacitance ^[3]	C ₀		60		pF

Notes:

1. I_{F,dc} = 60mA
2. I_{F,dc} = -10μA
3. V_F = 0V; f = 1MHz

Electrical Output Signal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Supply Current (without LED current)	I _{CC}		27	45	mA	
High Level Output Voltage	V _{OH}	4.2	4.7		V	
Low Level Output Voltage	V _{OL}		0.22	0.4	V	
Output Risetime (10-90%) ^[1, 2]	t _r		10	20	ns	
Output Falltime (90-10%) ^[1, 2]	t _f		10	20	ns	
Power Supply Noise Immunity	PSNI	0.1	0.4		V _{pp}	Sine Wave DC - 10MHz

Notes:

1. C_L = 10pF
2. In the recommended drive circuit
3. Typical Value measured from junction to PC board solder joint for horizontal mount package


Specified Link Performance, T_A = -40° to +85°C, DC to 10MBaud, unless otherwise noted.

Parameter	Symbol	Min.	Typ	Max.	Unit	Condition
Signaling Rate	f _S	DC		10	Mbaud	NRZ
Pulse Width Variation ^[1]	PWV	80		120	ns	10Mbaud
Propagation Delay Time ^[2]	t _D		95		ns	Assuming a delay of 10ns from the application (already included)
Duty Cycle Distortion ^[3]	DCD	-10		+10	ns	10Mbaud


Notes:

1. Minimum/maximum duty cycle distortion +/-10ns
2. Determined from 50% of the rising edge of data_in to 50% of the consecutive falling egde of data_out
3. +/-10% of the nominal pulse width


Package views - HFBR-3810Z

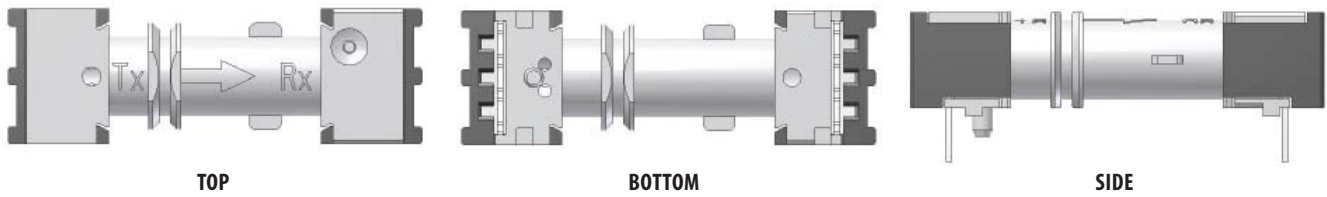

Package views - HFBR-3810MSZ

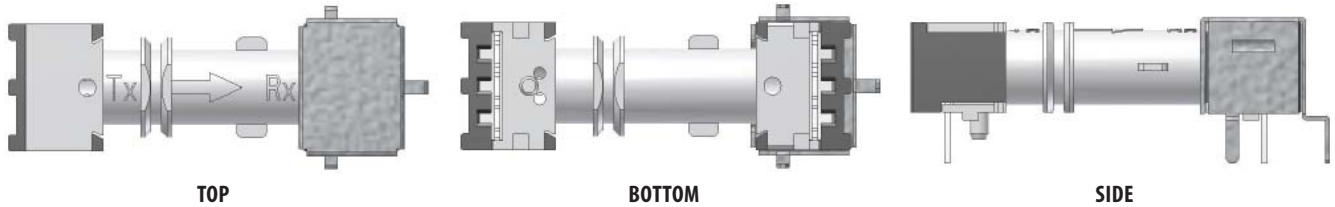

Mandatory Drive circuit – Top view

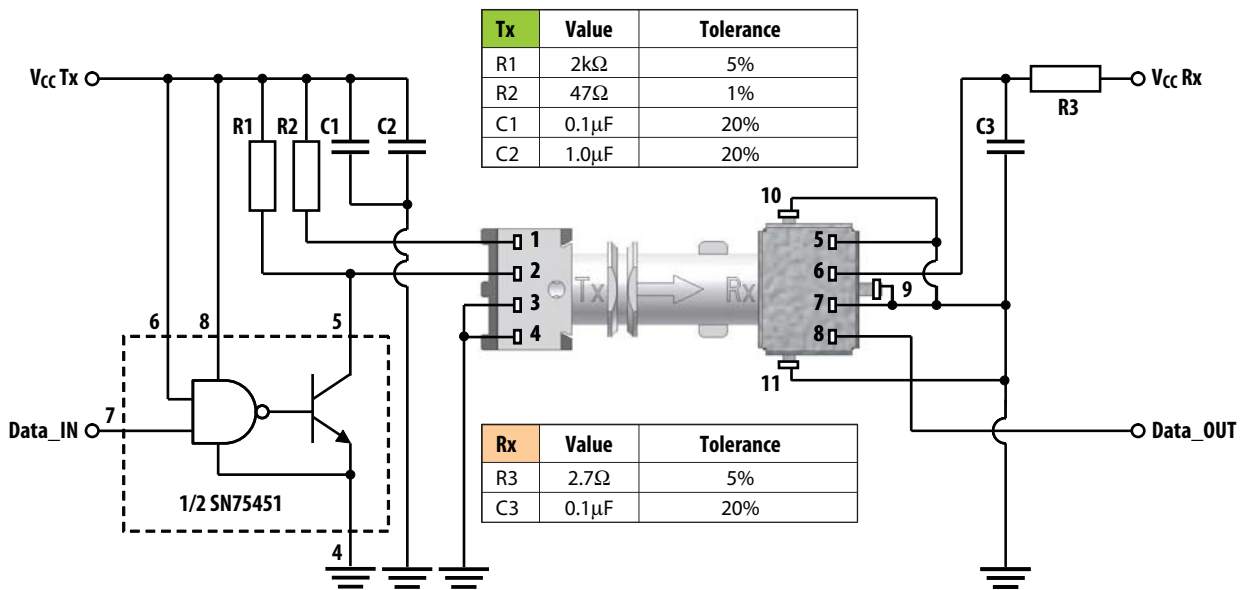

Pin description


Pin No.	Transmitter
1	Anode
2	Cathode
3	GND
4	GND

Pin No.	Receiver
5	GND
6	VCC(5V)
7	GND
8	Data_OUT
9, 10, 11	GND (shield option ^[1])


Note:

- Pin 9,10 and 11 are not available if HFBR-3810Z is used and therefore do not need to be considered.


Mechanical Dimensions - HFBR-3810Z

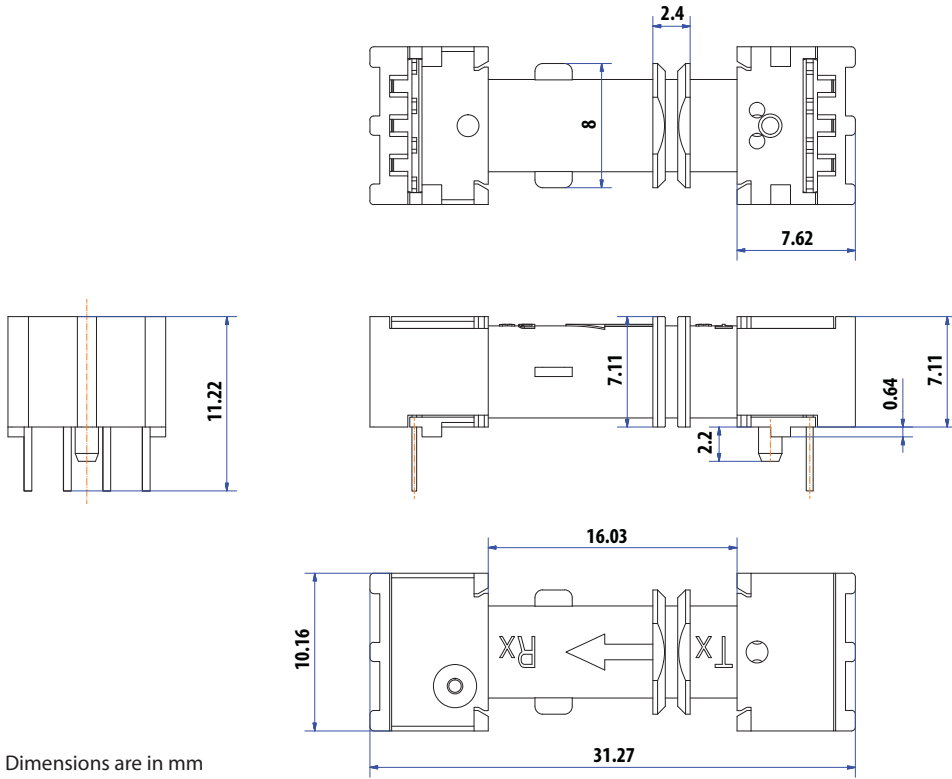

Mechanical Dimensions - HFBR-3810MSZ


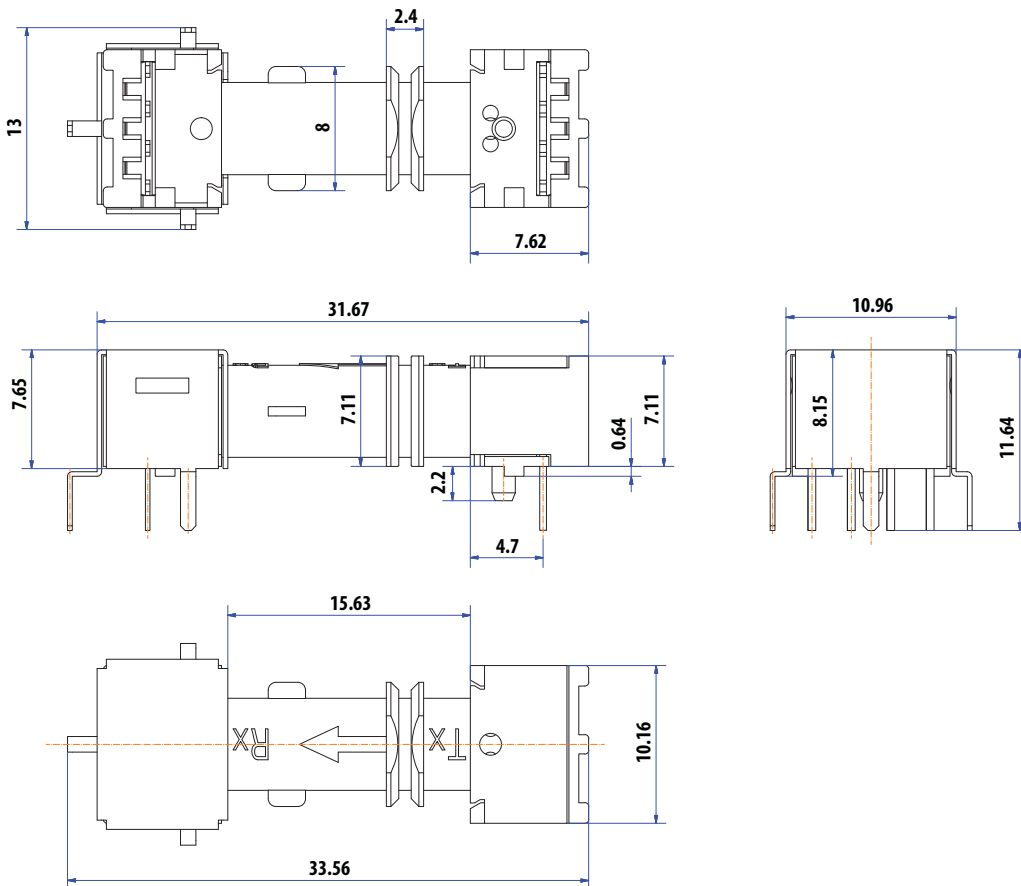


Footprint bottom view - HFBR-3810Z and HFBR-3810MSZ

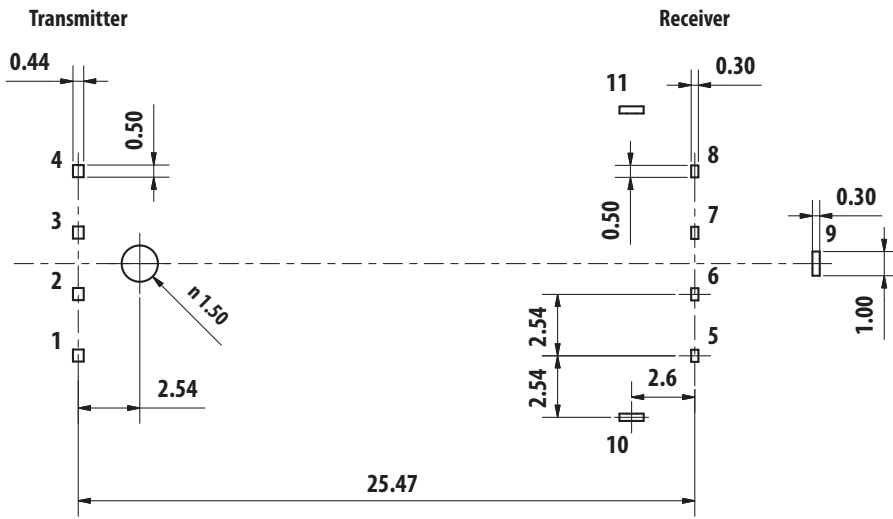

Dimensions are in mm

Marking - HFBR-3810Z and HFBR-3810MSZ

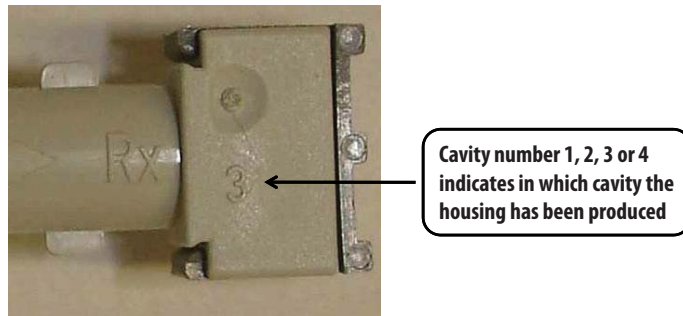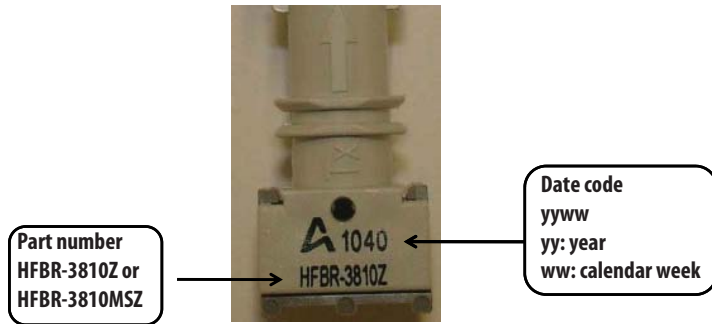

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2011 Avago Technologies. All rights reserved.
AV02-2510EN - November 21, 2011

AVAGO
TECHNOLOGIES