



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

International **IR** Rectifier


- Advanced Process Technology
- Ultra Low On-Resistance
- Dual P Channel MOSFET
- Surface Mount
- Available in Tape & Reel
- 150°C Operating Temperature
- Lead-Free

END OF LIFE

PD - 96105B


IRF7306QPbF

HEXFET® Power MOSFET

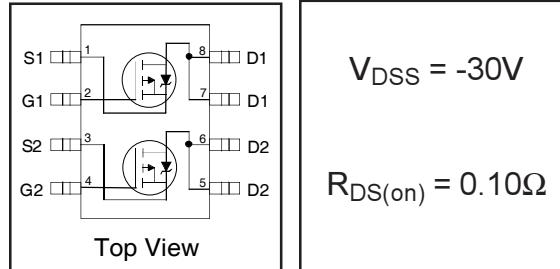

$V_{DSS} = -30V$

$R_{DS(on)} = 0.10\Omega$



Description

These HEXFET® Power MOSFET's in a Dual SO-8 package utilize the lastest processing techniques to achieve extremely low on-resistance per silicon area. Additional features of these HEXFET Power MOSFET's are a 150°C junction operating temperature, fast switching speed and improved repetitive avalanche rating. These benefits combine to make this design an extremely efficient and reliable device for use in a wide variety of applications.

The efficient SO-8 package provides enhanced thermal characteristics and dual MOSFET die capability making it ideal in a variety of power applications. This dual, surface mount SO-8 can dramatically reduce board space and is also available in Tape & Reel.

Base part number	Orderable part number	Package Type	Standard Pack		EOL Notice	Replacement Part Number
			Form	Quantity		
IRF7306QPbF	IRF7306QTRPbF	SO-8	Tape and Reel	4000	EOL 529	Please search the EOL part number on IR's website for guidance
	IRF7306QPbF	SO-8	Tube	95	EOL 527	

Absolute Maximum Ratings

	Parameter	Max.	Units
$I_D @ T_A = 25^\circ C$	10 Sec. Pulsed Drain Current, $V_{GS} @ -10V$	-4.0	A
$I_D @ T_A = 25^\circ C$	Continuous Drain Current, $V_{GS} @ -10V$	-3.6	
$I_D @ T_A = 70^\circ C$	Continuous Drain Current, $V_{GS} @ -10V$	-2.9	
I_{DM}	Pulsed Drain Current ①	-14	
$P_D @ T_A = 25^\circ C$	Power Dissipation	2.0	W
	Linear Derating Factor	0.016	W/°C
V_{GS}	Gate-to-Source Voltage	±20	V
dv/dt	Peak Diode Recovery dv/dt ②	-5.0	V/ns
T_J, T_{STG}	Junction and Storage Temperature Range	-55 to + 150	°C

Thermal Resistance Ratings


	Parameter	Typ.	Max.	Units
$R_{θJA}$	Maximum Junction-to-Ambient ④	—	62.5	°C/W

END OF LIFE


IRF7306QPbF

International
IR Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{DSS}}$	Drain-to-Source Breakdown Voltage	-30	---	---	V	$V_{GS} = 0V, I_D = -250\mu\text{A}$
$\Delta V_{(\text{BR})\text{DSS}/\Delta T}$	Breakdown Voltage Temp. Coefficient	---	-0.037	---	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = -1\text{mA}$
$R_{DS(\text{ON})}$	Static Drain-to-Source On-Resistance	---	---	0.10	Ω	$V_{GS} = -10V, I_D = -1.8\text{A}$ ③
		---	---	0.16		$V_{GS} = -4.5V, I_D = -1.5\text{A}$ ③
$V_{GS(\text{th})}$	Gate Threshold Voltage	-1.0	---	---	V	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$
g_{fs}	Forward Transconductance	2.5	---	---	S	$V_{DS} = -24V, I_D = -1.8\text{A}$
I_{DSS}	Drain-to-Source Leakage Current	---	---	-1.0	μA	$V_{DS} = -24V, V_{GS} = 0V$
		---	---	-25		$V_{DS} = -24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	---	---	-100	nA	$V_{GS} = -20V$
	Gate-to-Source Reverse Leakage	---	---	100		$V_{GS} = 20V$
Q_g	Total Gate Charge	---	---	25	nC	$I_D = -1.8\text{A}$
Q_{gs}	Gate-to-Source Charge	---	---	2.9		$V_{DS} = -24V$
Q_{gd}	Gate-to-Drain ("Miller") Charge	---	---	9.0		$V_{GS} = -10V, \text{See Fig. 6 and 12}$ ③
$t_{d(on)}$	Turn-On Delay Time	---	11	---	ns	$V_{DD} = -15V$
t_r	Rise Time	---	17	---		$I_D = -1.8\text{A}$
$t_{d(off)}$	Turn-Off Delay Time	---	25	---		$R_G = 6.0\Omega$
t_f	Fall Time	---	18	---		$R_D = 8.2\Omega, \text{See Fig. 10}$ ③
L_D	Internal Drain Inductance	---	4.0	---	nH	Between lead tip and center of die contact
L_S	Internal Source Inductance	---	6.0	---		
C_{iss}	Input Capacitance	---	440	---	pF	$V_{GS} = 0V$
C_{oss}	Output Capacitance	---	200	---		$V_{DS} = -25V$
C_{rss}	Reverse Transfer Capacitance	---	93	---		$f = 1.0\text{MHz}, \text{See Fig. 5}$

Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	---	---	-2.5	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	---	---	-14		
V_{SD}	Diode Forward Voltage	---	---	-1.0	V	$T_J = 25^\circ\text{C}, I_S = -1.8\text{A}, V_{GS} = 0V$ ③
t_{rr}	Reverse Recovery Time	---	53	80	ns	$T_J = 25^\circ\text{C}, I_F = -1.8\text{A}$
Q_{rr}	Reverse Recovery Charge	---	66	99	nC	$dI/dt = 100\text{A}/\mu\text{s}$ ③
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$)				

Notes:

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)

③ Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.

② $I_{SD} \leq -1.8\text{A}$, $dI/dt \leq 90\text{A}/\mu\text{s}$, $V_{DD} \leq V_{(\text{BR})\text{DSS}}$, $T_J \leq 150^\circ\text{C}$

④ Surface mounted on FR-4 board, $t \leq 10\text{sec}$.

END OF LIFE

IRF7306QPbF

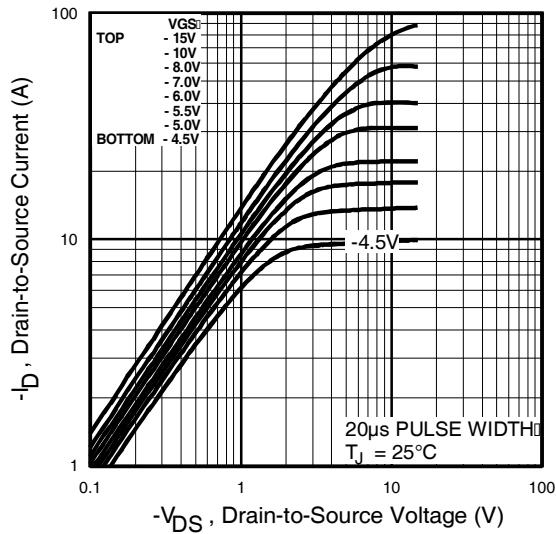


Fig 1. Typical Output Characteristics

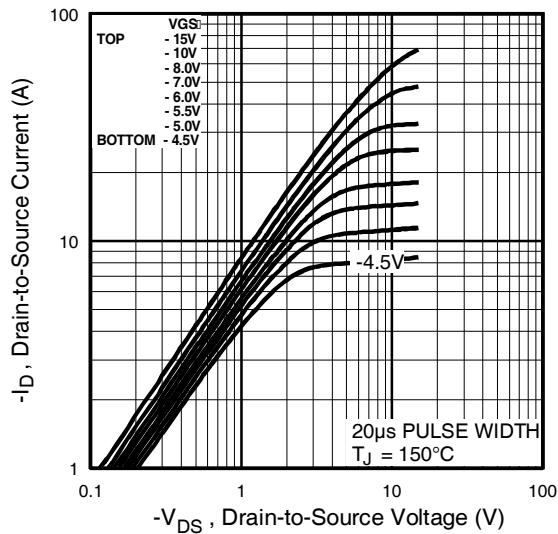


Fig 2. Typical Output Characteristics

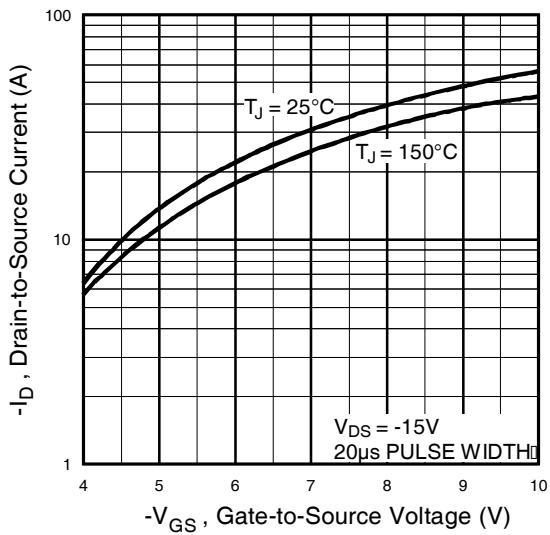


Fig 3. Typical Transfer Characteristics

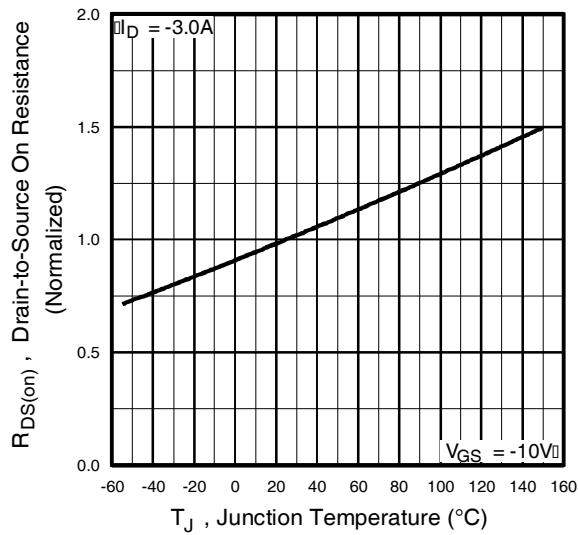


Fig 4. Normalized On-Resistance
Vs. Temperature

END OF LIFE

IRF7306QPbF

International
IR Rectifier

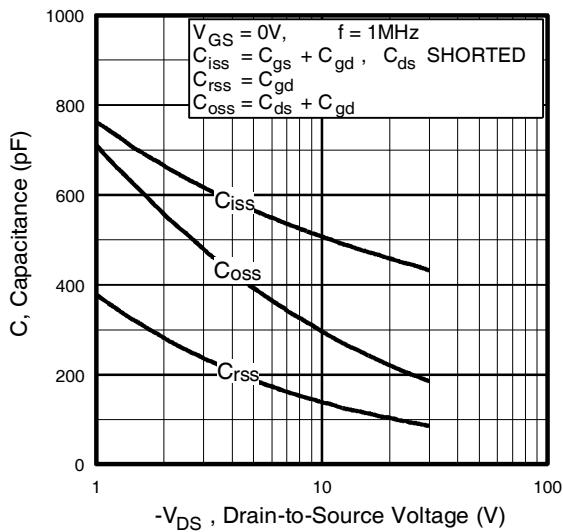


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

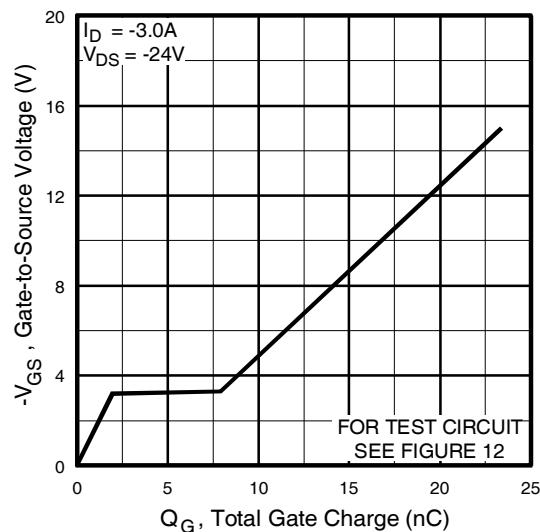


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage

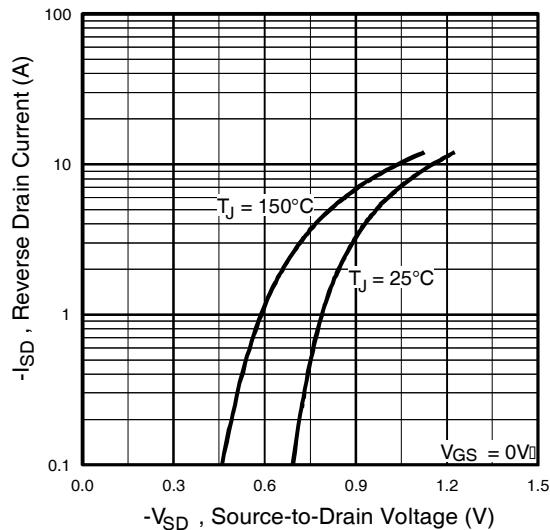


Fig 7. Typical Source-Drain Diode
Forward Voltage

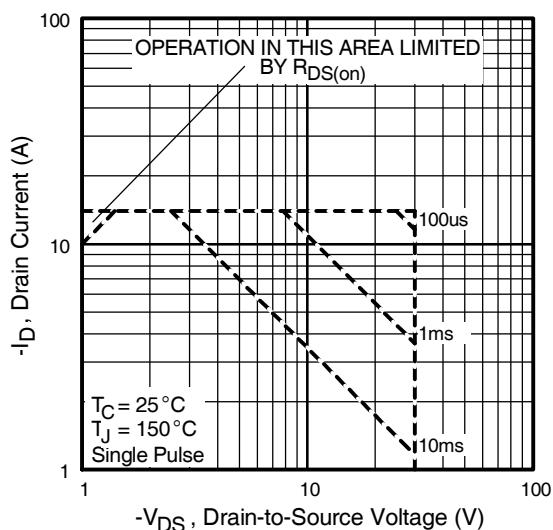


Fig 8. Maximum Safe Operating Area

END OF LIFE

International
IR Rectifier

IRF7306QPbF

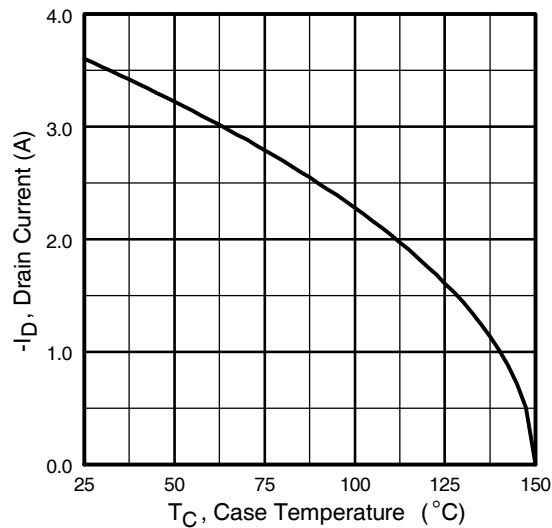


Fig 9. Maximum Drain Current Vs.
Ambient Temperature

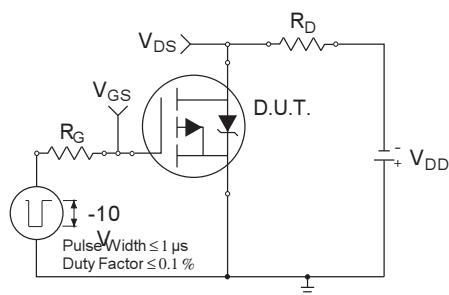


Fig 10a. Switching Time Test Circuit

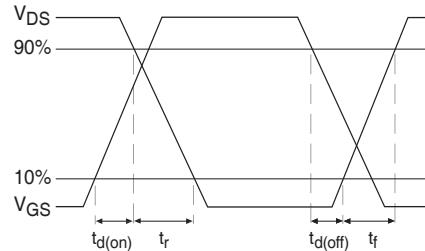


Fig 10b. Switching Time Waveforms

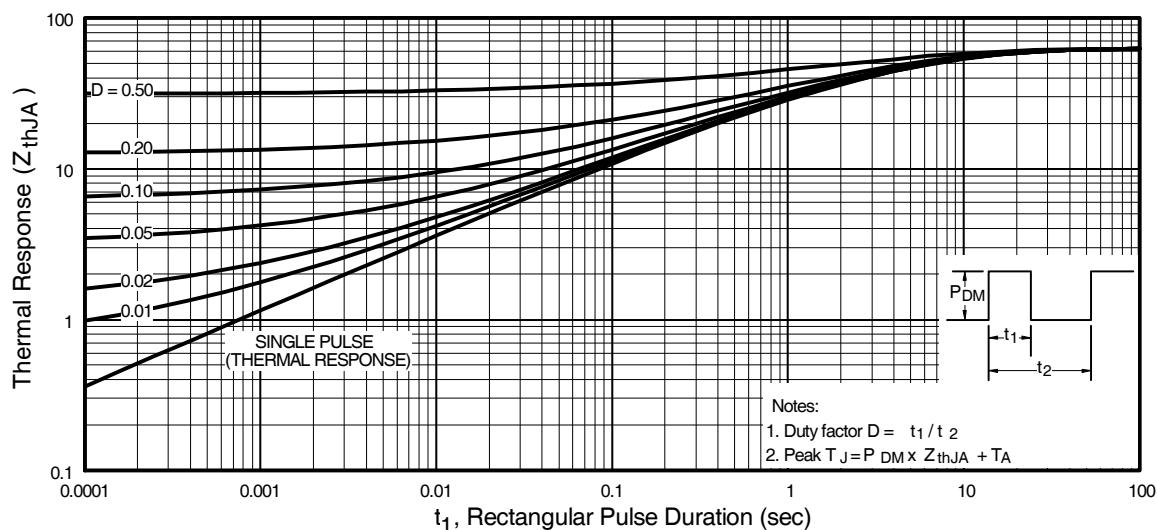


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

END OF LIFE

IRF7306QPbF

International
IR Rectifier

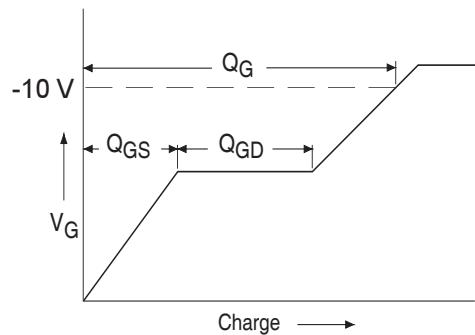


Fig 12a. Basic Gate Charge Waveform

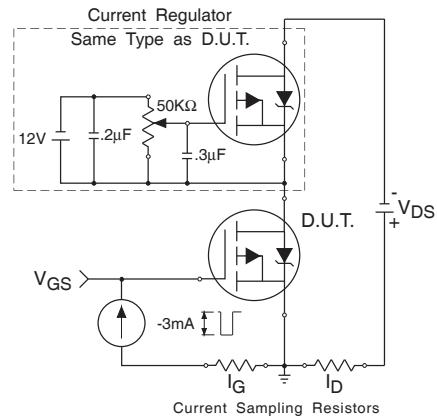



Fig 12b. Gate Charge Test Circuit

END OF LIFE

International
IR Rectifier


IRF7306QPbF

Peak Diode Recovery dv/dt Test Circuit

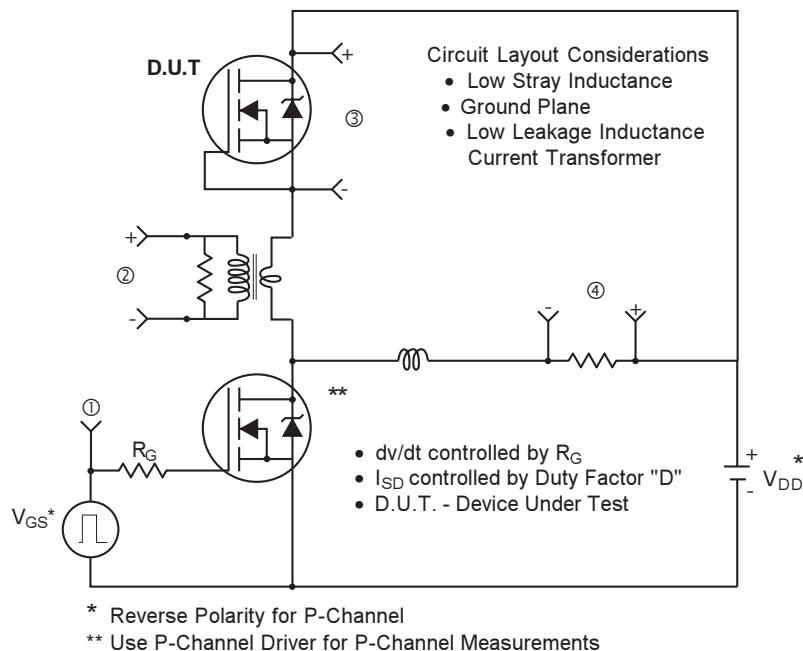

* Reverse Polarity for P-Channel

** Use P-Channel Driver for P-Channel Measurements

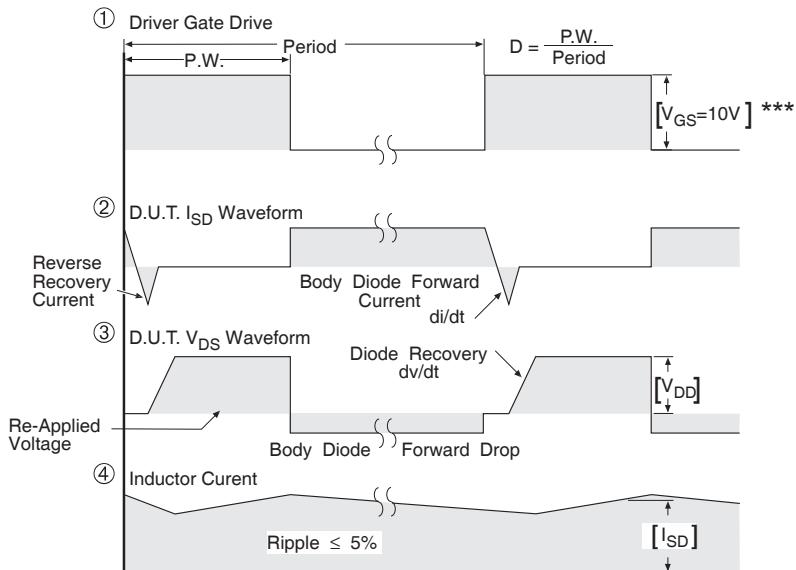

*** $V_{GS} = 5.0\text{V}$ for Logic Level and 3V Drive Devices

Fig 13. For P-Channel HEXFETS


END OF LIFE

IRF7306QPbF



International
IR Rectifier

SO-8 Package Outline

Dimensions are shown in millimeters (inches)

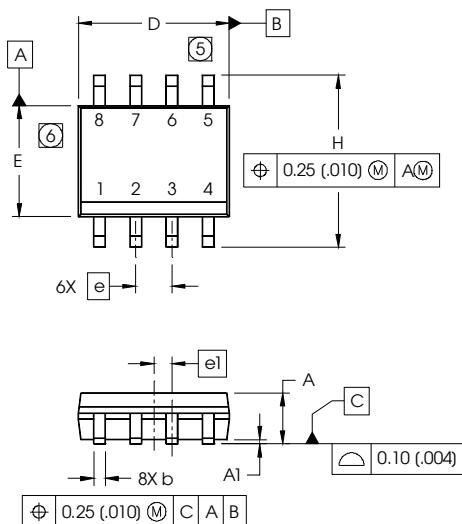


DIM	INCHES		MILLIMETERS	
	MN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050	BASIC	1.27	BASIC
e1	.025	BASIC	0.635	BASIC
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°

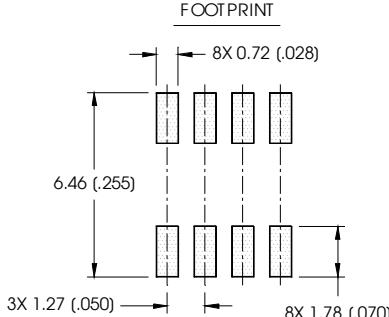

SO-8 Part Marking

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

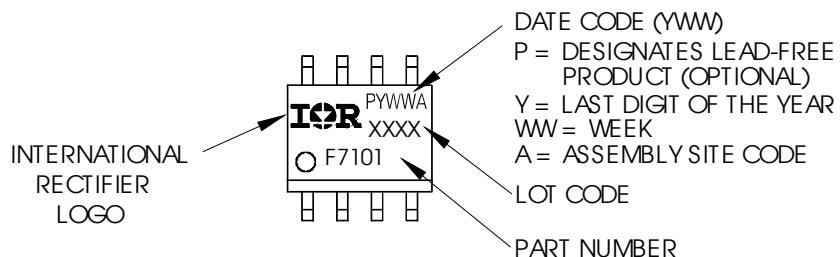

Notes:

1. For an Automotive Qualified version of this part please see <http://www.irf.com/product-info/auto/>
2. For the most current drawing please refer to IR website at <http://www.irf.com/package/>


END OF LIFE

International
IR Rectifier

IRF7306QPbF


SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

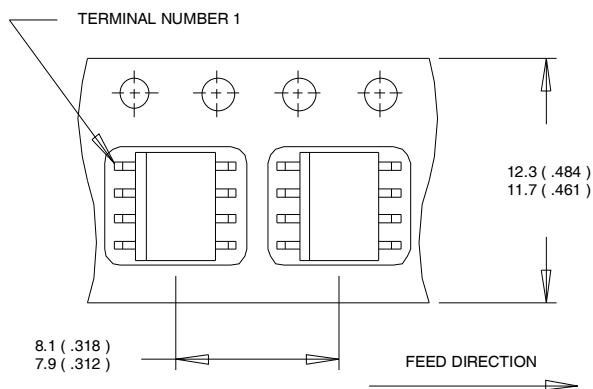

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

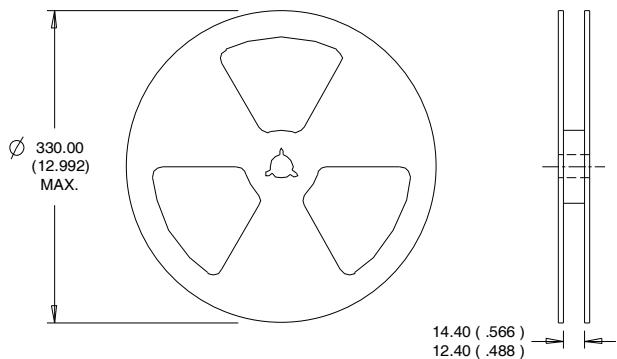

NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

For the most current drawing please refer to IR website at <http://www.irf.com/package/>

END OF LIFE**IRF7306QPbF**

International
IR Rectifier

Qualification Information[†]

Qualification level	Industrial [†]	
	(per JEDEC JESD47F ^{††} guidelines)	
Moisture Sensitivity Level	SO-8	MSL1 (per JEDEC J-STD-020D ^{††})
RoHS Compliant	Yes	

† Qualification standards can be found at International Rectifier's web site
<http://www.irf.com/product-info/reliability>

†† Applicable version of JEDEC standard at the time of product release.

Revision History

Date	Comments
7/2/2014	• Added ordering information to reflect the End-Of-life

International
IR Rectifier

IR WORLD HEADQUARTERS: 101 N. Sepulveda Blvd., El Segundo, California 90245, USA
To contact International Rectifier, please visit <http://www.irf.com/whoto-call/>
www.irf.com