



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




### Application

- Brushed Motor drive applications
- BLDC Motor drive applications
- Battery powered circuits
- Half-bridge and full-bridge topologies
- Synchronous rectifier applications
- Resonant mode power supplies
- OR-ing and redundant power switches
- DC/DC and AC/DC converters
- DC/AC Inverters

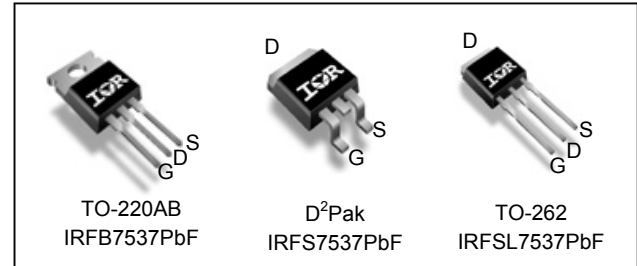
### Benefits

- Improved Gate, Avalanche and Dynamic dV/dt Ruggedness
- Fully Characterized Capacitance and Avalanche SOA
- Enhanced body diode dV/dt and dI/dt Capability
- Lead-Free, RoHS Compliant

HEXFET® Power MOSFET




|                                |               |
|--------------------------------|---------------|
| <b>V<sub>DSS</sub></b>         | <b>60V</b>    |
| <b>R<sub>DS(on)</sub> typ.</b> | <b>2.75mΩ</b> |
|                                | <b>3.30mΩ</b> |
| <b>I<sub>D</sub></b>           | <b>173A</b>   |




|          |          |          |
|----------|----------|----------|
| <b>G</b> | <b>D</b> | <b>S</b> |
| Gate     | Drain    | Source   |

| Base part number | Package Type | Standard Pack      |          | Orderable Part Number |
|------------------|--------------|--------------------|----------|-----------------------|
|                  |              | Form               | Quantity |                       |
| IRFB7537PbF      | TO-220       | Tube               | 50       | IRFB7537PbF           |
| IRFSL7537PbF     | TO-262       | Tube               | 50       | IRFSL7537PbF          |
| IRFS7537PbF      | D²-Pak       | Tube               | 50       | IRFS7537PbF           |
|                  |              | Tape and Reel Left | 800      | IRFS7537TRLPbF        |

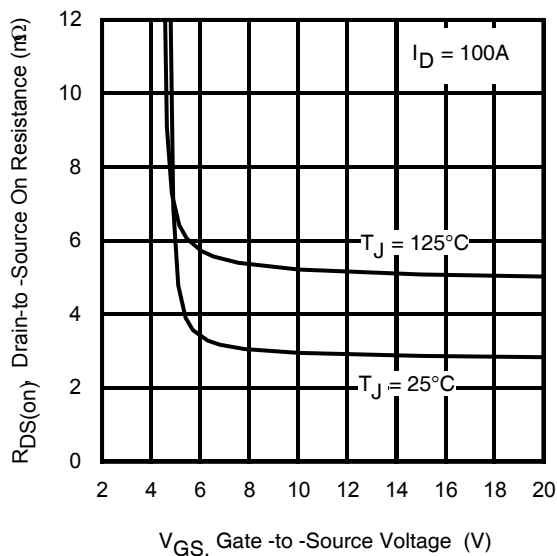

**Fig 1.** Typical On-Resistance vs. Gate Voltage

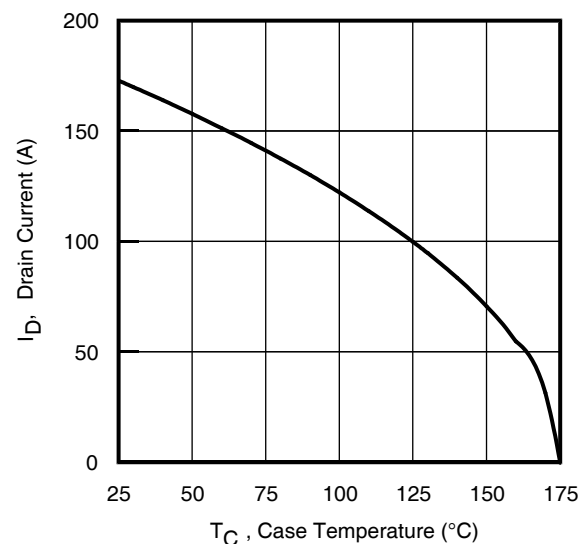

**Fig 2.** Maximum Drain Current vs. Case Temperature

**Absolute Maximum Rating**

| Symbol                          | Parameter   | Max.                | Units |
|---------------------------------|---|---------------------|-------|
| $I_D @ T_C = 25^\circ\text{C}$  | Continuous Drain Current, $V_{GS} @ 10\text{V}$         | 173                 | A     |
| $I_D @ T_C = 100^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10\text{V}$         | 122                 |       |
| $I_{DM}$                        | Pulsed Drain Current ①                                  | 700                 |       |
| $P_D @ T_C = 25^\circ\text{C}$  | Maximum Power Dissipation                               | 230                 | W     |
|                                 | Linear Derating Factor                                  | 1.5                 | W/°C  |
| $V_{GS}$                        | Gate-to-Source Voltage                                  | $\pm 20$            | V     |
| $T_J$<br>$T_{STG}$              | Operating Junction and Storage Temperature Range        | -55 to + 175        | °C    |
|                                 | Soldering Temperature, for 10 seconds (1.6mm from case) | 300                 |       |
|                                 | Mounting Torque, 6-32 or M3 Screw                       | 10 lbf-in (1.1 N-m) |       |

**Avalanche Characteristics**

|                 |                                 |                          |    |
|-----------------|---------------------------------|--------------------------|----|
| $E_{AS}$        | Single Pulse Avalanche Energy ② | 270                      | mJ |
| $E_{AS(L=1mH)}$ | Single Pulse Avalanche Energy ③ | 554                      |    |
| $I_{AR}$        | Avalanche Current ①             | See Fig 15, 16, 23a, 23b | A  |
| $E_{AR}$        | Repetitive Avalanche Energy ①   |                          | mJ |

**Thermal Resistance**

| Symbol          | Parameter  | Typ. | Max. | Units |
|-----------------|--|------|------|-------|
| $R_{\theta JC}$ | Junction-to-Case ⑦                                     | —    | 0.65 | °C/W  |
| $R_{\theta CS}$ | Case-to-Sink, Flat Greased Surface                     | 0.50 | —    |       |
| $R_{\theta JA}$ | Junction-to-Ambient (TO-220)                           | —    | 62   |       |
| $R_{\theta JA}$ | Junction-to-Ambient (PCB Mount) (D <sup>2</sup> -Pak)⑧ | —    | 40   |       |

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

| Symbol                          | Parameter                            | Min. | Typ. | Max. | Units | Conditions   |
|---------------------------------|--------------------------------------|------|------|------|-------|--|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 60   | —    | —    | V     | $V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$                         |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 40   | —    | mV/°C | Reference to $25^\circ\text{C}, I_D = 1\text{mA}$ ①                |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | 2.75 | 3.30 | mΩ    | $V_{GS} = 10\text{V}, I_D = 100\text{A}$                           |
|                                 |                                      | —    | 3.50 | —    |       | $V_{GS} = 6.0\text{V}, I_D = 50\text{A}$                           |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 2.1  | —    | 3.7  | V     | $V_{DS} = V_{GS}, I_D = 150\mu\text{A}$                            |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —    | 1.0  | μA    | $V_{DS} = 60\text{V}, V_{GS} = 0\text{V}$                          |
|                                 |                                      | —    | —    | 150  |       | $V_{DS} = 60\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —    | 100  | nA    | $V_{GS} = 20\text{V}$  |
|                                 | Gate-to-Source Reverse Leakage       | —    | —    | -100 |       | $V_{GS} = -20\text{V}$   |
| $R_G$                           | Gate Resistance                      | —    | 2.0  | —    | Ω     |  |


**Notes:**

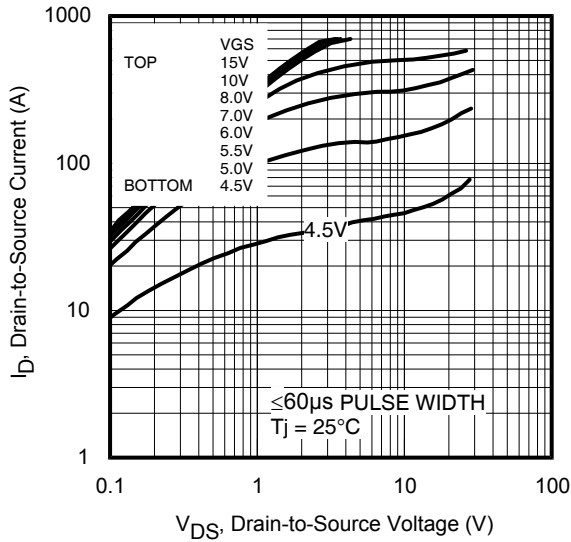
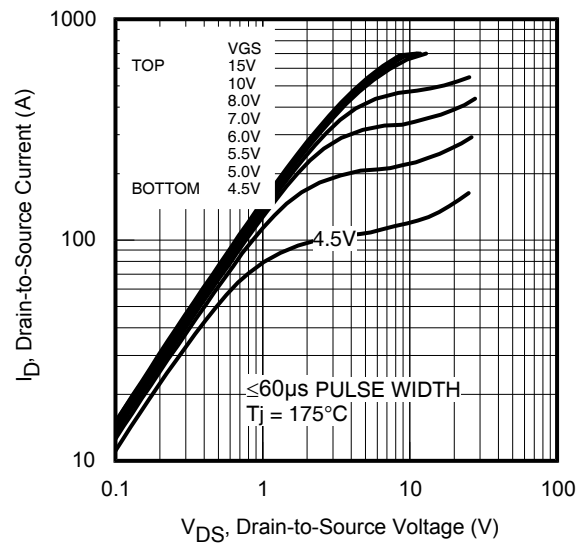
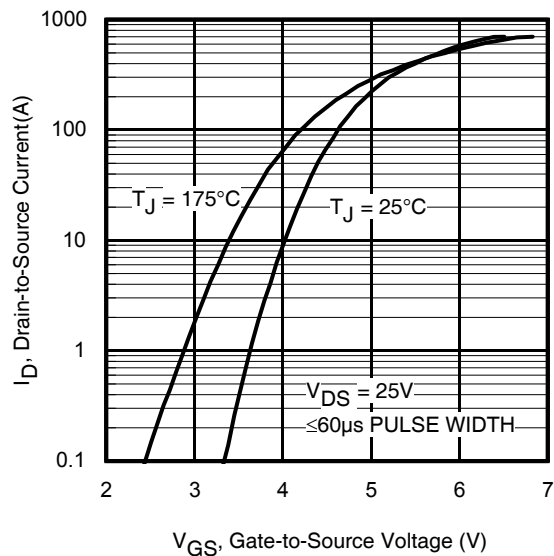
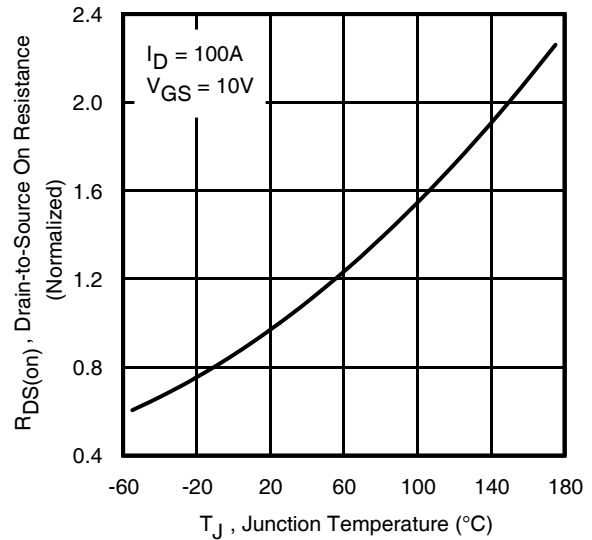
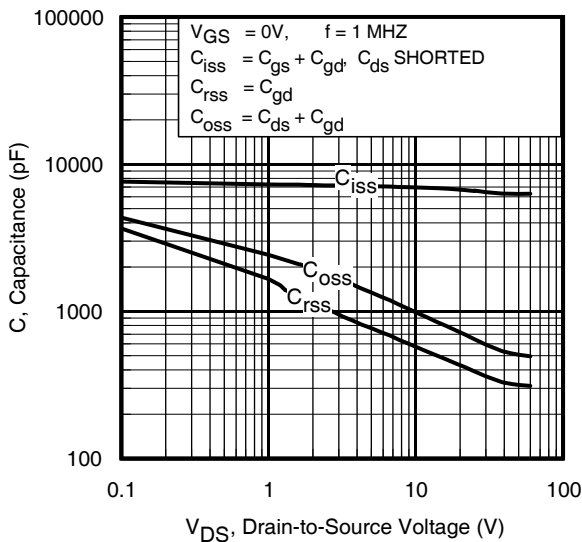
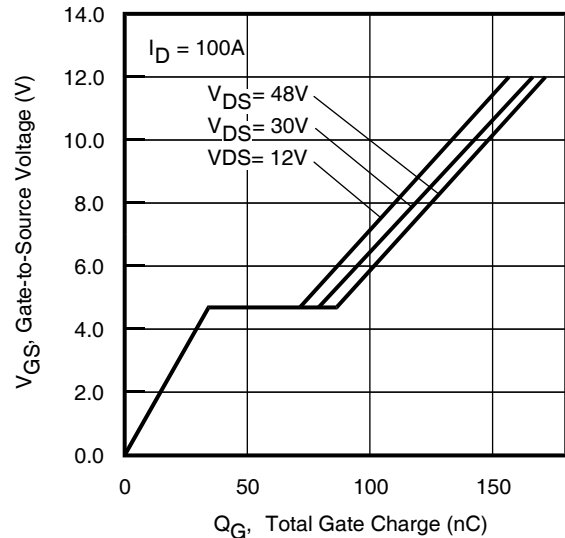
- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Limited by  $T_{Jmax}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 54\mu\text{H}$ ,  $R_G = 50\Omega$ ,  $I_{AS} = 100\text{A}$ ,  $V_{GS} = 10\text{V}$ .
- ③  $I_{SD} \leq 100\text{A}$ ,  $di/dt \leq 1130\text{A}/\mu\text{s}$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_J \leq 175^\circ\text{C}$ .
- ④ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ⑤  $C_{oss}$  eff. (TR) is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$ .
- ⑥  $C_{oss}$  eff. (ER) is a fixed capacitance that gives the same energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$ .
- ⑦  $R_\theta$  is measured at  $T_J$  approximately  $90^\circ\text{C}$ .
- ⑧ When mounted on 1" square PCB (FR-4 or G-10 Material). For recommended footprint and soldering techniques refer to application note #AN-994.: <http://www.irf.com/technical-info/appnotes/an-994.pdf>
- ⑨ Limited by  $T_{Jmax}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 1\text{mH}$ ,  $R_G = 50\Omega$ ,  $I_{AS} = 33\text{A}$ ,  $V_{GS} = 10\text{V}$ .

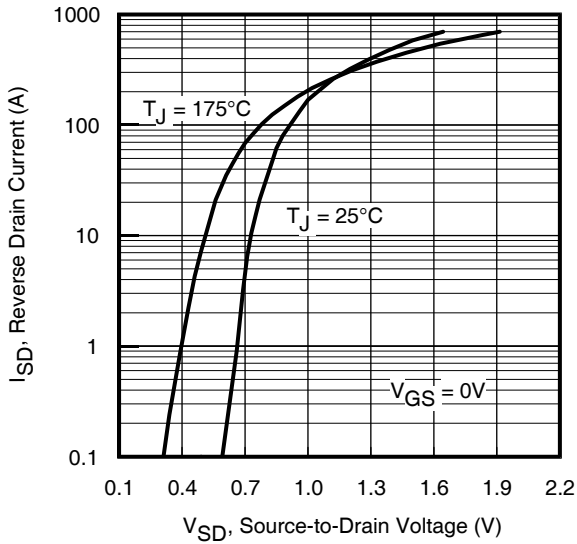
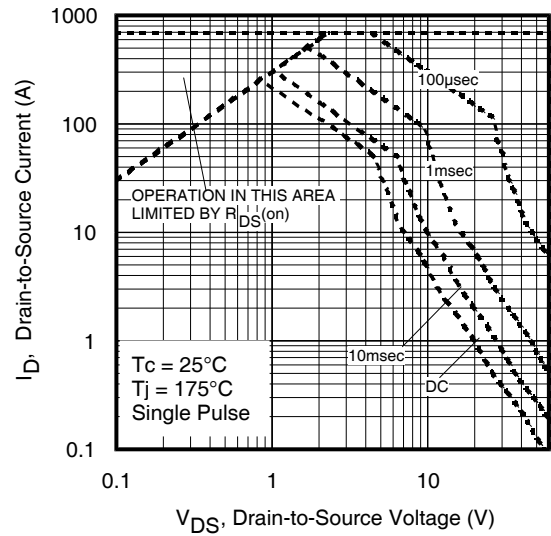
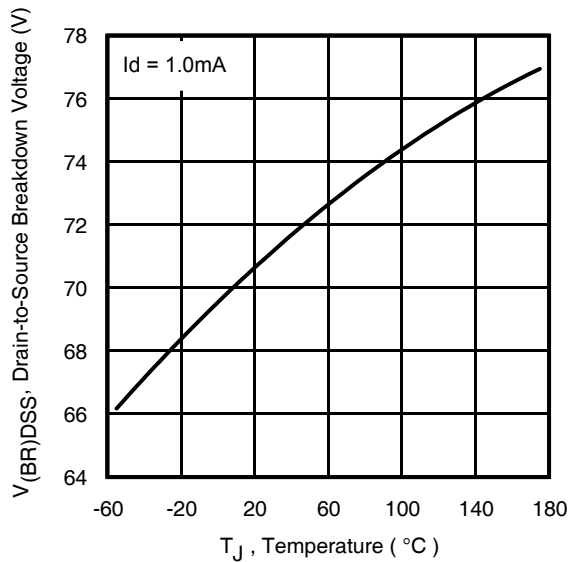
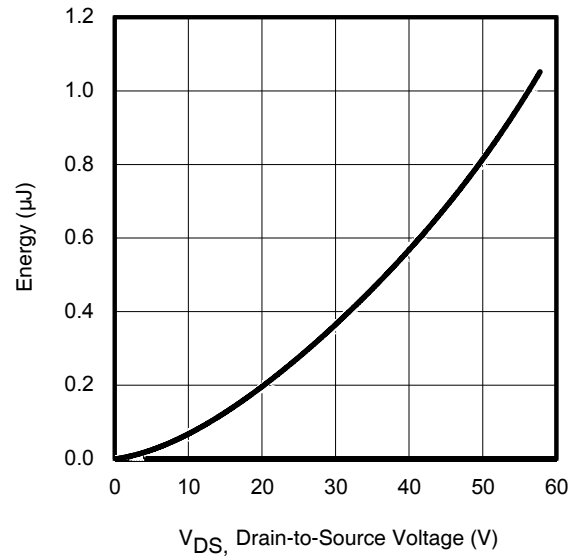
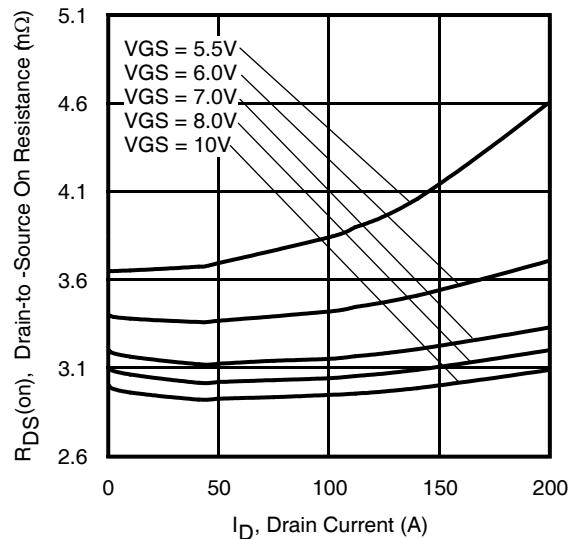
**Dynamic Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

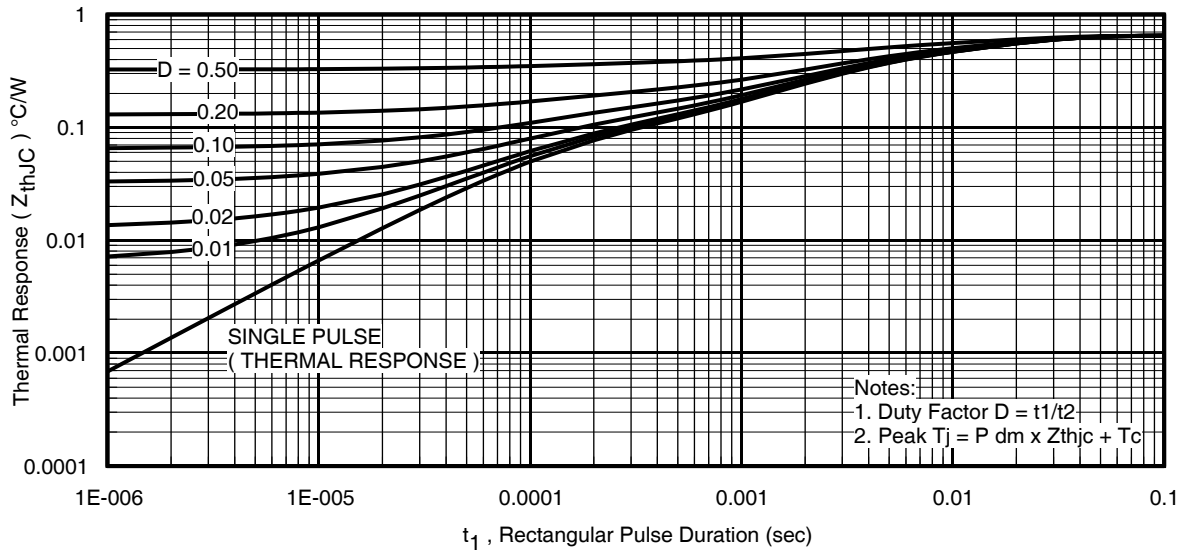
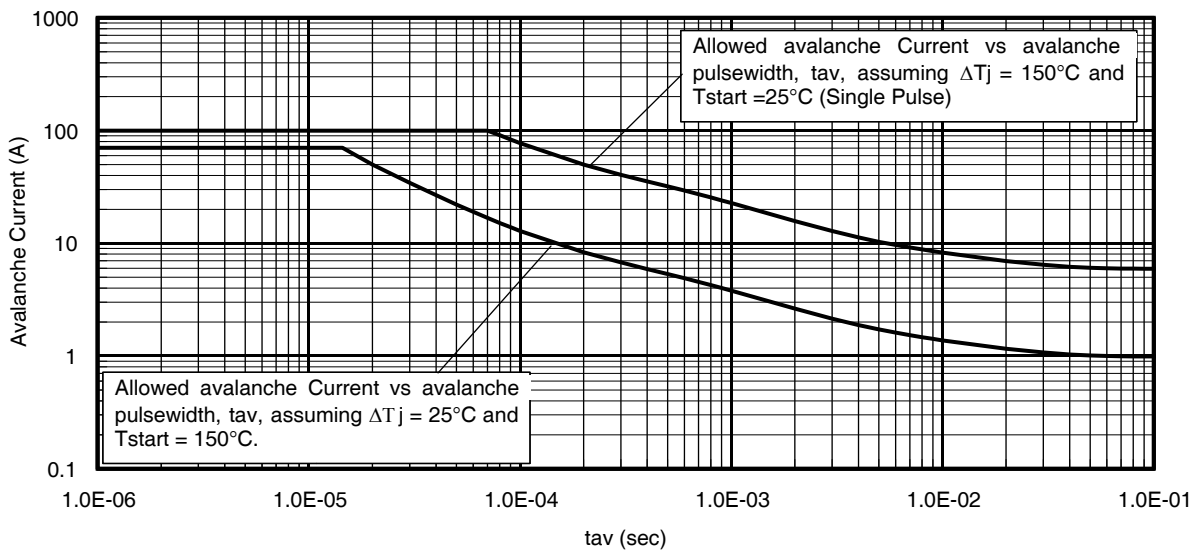
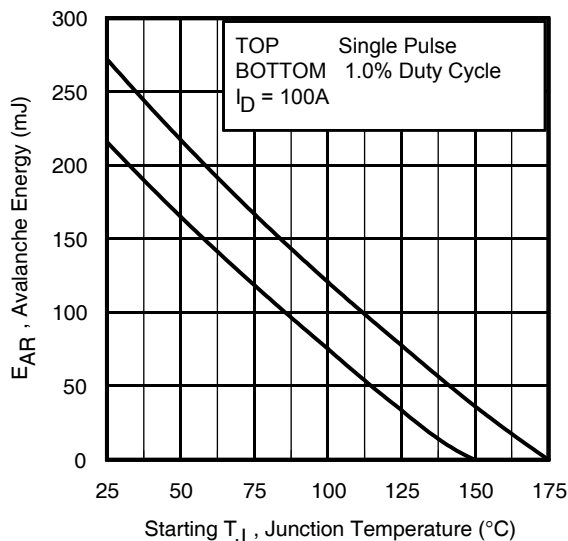
| Symbol                    | Parameter   | Min. | Typ. | Max. | Units | Conditions   |
|---------------------------|---|------|------|------|-------|--|
| g <sub>fs</sub>           | Forward Transconductance                                    | 190  | —    | —    | S     | V <sub>DS</sub> = 10V, I <sub>D</sub> = 100A   |
| Q <sub>g</sub>            | Total Gate Charge   | —    | 142  | 210  | nC    | I <sub>D</sub> = 100A<br>V <sub>DS</sub> = 30V<br>V <sub>GS</sub> = 10V  |
| Q <sub>gs</sub>           | Gate-to-Source Charge                                       | —    | 36   | —    |       |  |
| Q <sub>gd</sub>           | Gate-to-Drain Charge  | —    | 43   | —    |       |  |
| Q <sub>sync</sub>         | Total Gate Charge Sync. (Q <sub>g</sub> – Q <sub>gd</sub> ) | —    | 99   | —    |       |  |
| t <sub>d(on)</sub>        | Turn-On Delay Time  | —    | 15   | —    | ns    | V <sub>DD</sub> = 30V<br>I <sub>D</sub> = 100A<br>R <sub>G</sub> = 2.7Ω<br>V <sub>GS</sub> = 10V④  |
| t <sub>r</sub>            | Rise Time   | —    | 105  | —    |       |  |
| t <sub>d(off)</sub>       | Turn-Off Delay Time   | —    | 82   | —    |       |  |
| t <sub>f</sub>            | Fall Time   | —    | 84   | —    |       |  |
| C <sub>iss</sub>          | Input Capacitance   | —    | 7020 | —    | pF    | V <sub>GS</sub> = 0V<br>V <sub>DS</sub> = 25V<br>f = 1.0MHz, See Fig.7<br>V <sub>GS</sub> = 0V, V <sub>DS</sub> = 0V to 48V⑥<br>V <sub>GS</sub> = 0V, V <sub>DS</sub> = 0V to 48V⑤ |
| C <sub>oss</sub>          | Output Capacitance  | —    | 640  | —    |       |  |
| C <sub>riss</sub>         | Reverse Transfer Capacitance                                | —    | 395  | —    |       |  |
| C <sub>oss eff.(ER)</sub> | Effective Output Capacitance (Energy Related)               | —    | 665  | —    |       |  |
| C <sub>oss eff.(TR)</sub> | Output Capacitance (Time Related)                           | —    | 880  | —    |       |  |

**Diode Characteristics**

| Symbol           | Parameter                              | Min. | Typ. | Max. | Units | Conditions  |
|------------------|--|------|------|------|-------|---|
| I <sub>S</sub>   | Continuous Source Current (Body Diode) | —    | —    | 173  | A     | MOSFET symbol showing the integral reverse p-n junction diode.  |
| I <sub>SM</sub>  | Pulsed Source Current (Body Diode) ①   | —    | —    | 700  |       |   |
| V <sub>SD</sub>  | Diode Forward Voltage                  | —    | —    | 1.2  | V     | T <sub>J</sub> = 25°C, I <sub>S</sub> = 100A, V <sub>GS</sub> = 0V ④  |
| dv/dt            | Peak Diode Recovery dv/dt③             | —    | 10   | —    | V/ns  | T <sub>J</sub> = 175°C, I <sub>S</sub> = 100A, V <sub>DS</sub> = 60V  |
| t <sub>rr</sub>  | Reverse Recovery Time                  | —    | 39   | —    | ns    | T <sub>J</sub> = 25°C V <sub>DD</sub> = 51V   |
|                  |  | —    | 41   | —    |       | T <sub>J</sub> = 125°C I <sub>F</sub> = 100A,   |
| Q <sub>rr</sub>  | Reverse Recovery Charge                | —    | 46   | —    | nC    | T <sub>J</sub> = 25°C di/dt = 100A/μs ④   |
|                  |  | —    | 56   | —    |       | T <sub>J</sub> = 125°C  |
| I <sub>RRM</sub> | Reverse Recovery Current               | —    | 2.1  | —    | A     | T <sub>J</sub> = 25°C   |


**Fig 3. Typical Output Characteristics**

**Fig 4. Typical Output Characteristics**

**Fig 5. Typical Transfer Characteristics**

**Fig 6. Normalized On-Resistance vs. Temperature**

**Fig 7. Typical Capacitance vs. Drain-to-Source Voltage**

**Fig 8. Typical Gate Charge vs. Gate-to-Source Voltage**


**Fig 9.** Typical Source-Drain Diode Forward Voltage

**Fig 10.** Maximum Safe Operating Area

**Fig 11.** Drain-to-Source Breakdown Voltage

**Fig 12.** Typical  $C_{oss}$  Stored Energy

**Fig 13.** Typical On-Resistance vs. Drain Current


**Fig 14. Maximum Effective Transient Thermal Impedance, Junction-to-Case**

**Fig 15. Avalanche Current vs. Pulse Width**

**Fig 16. Maximum Avalanche Energy vs. Temperature**
**Notes on Repetitive Avalanche Curves , Figures 15, 16:  
(For further info, see AN-1005 at www.irf.com)**

1. Avalanche failures assumption:  
Purely a thermal phenomenon and failure occurs at a temperature far in excess of  $T_{jmax}$ . This is validated for every part type.
2. Safe operation in Avalanche is allowed as long as  $T_{jmax}$  is not exceeded.
3. Equation below based on circuit and waveforms shown in Figures 23a, 23b.
4.  $P_{D(ave)}$  = Average power dissipation per single avalanche pulse.
5. BV = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
6.  $I_{av}$  = Allowable avalanche current.
7.  $\Delta T$  = Allowable rise in junction temperature, not to exceed  $T_{jmax}$  (assumed as 25°C in Figure 14, 15).

$$t_{av} = \text{Average time in avalanche.}$$

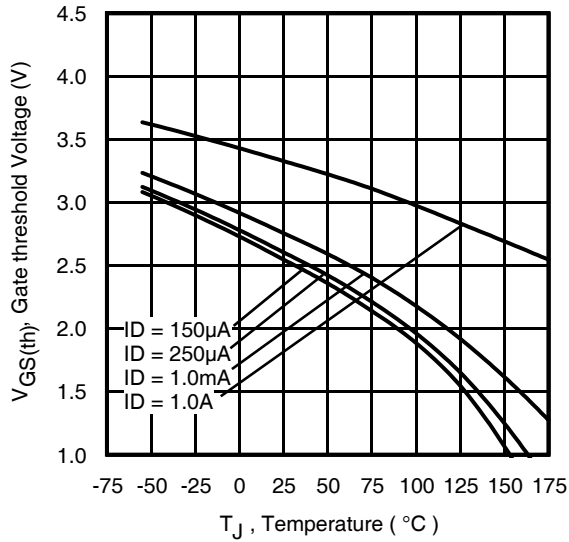
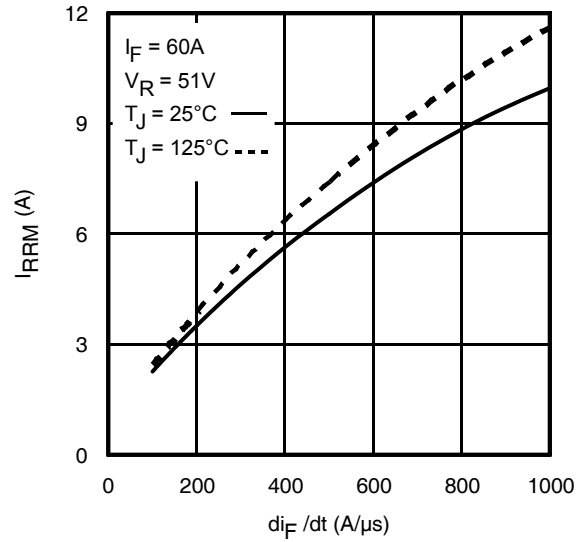
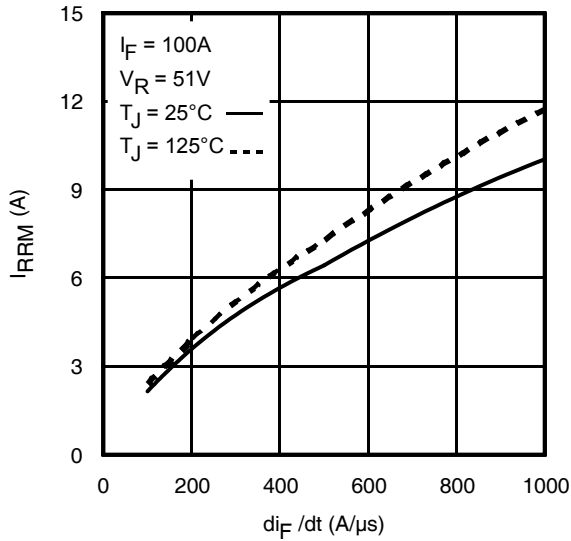
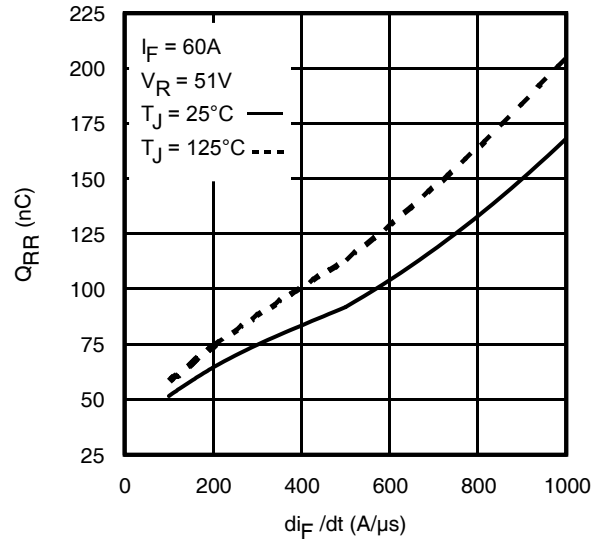
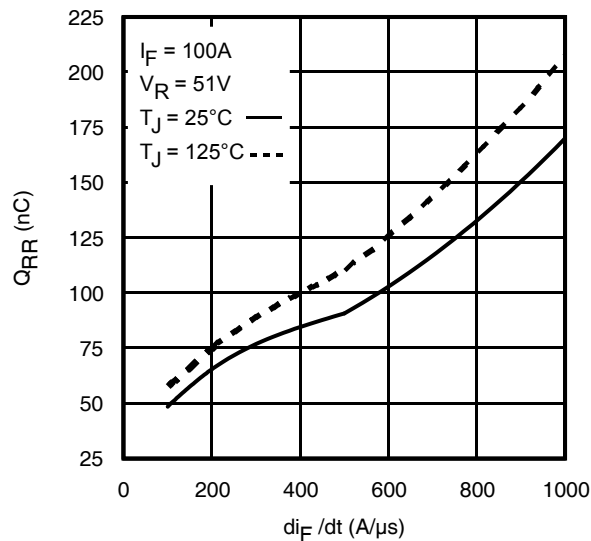
$$D = \text{Duty cycle in avalanche} = t_{av} \cdot f$$

$$Z_{thJC}(D, t_{av}) = \text{Transient thermal resistance, see Figures 14)}$$

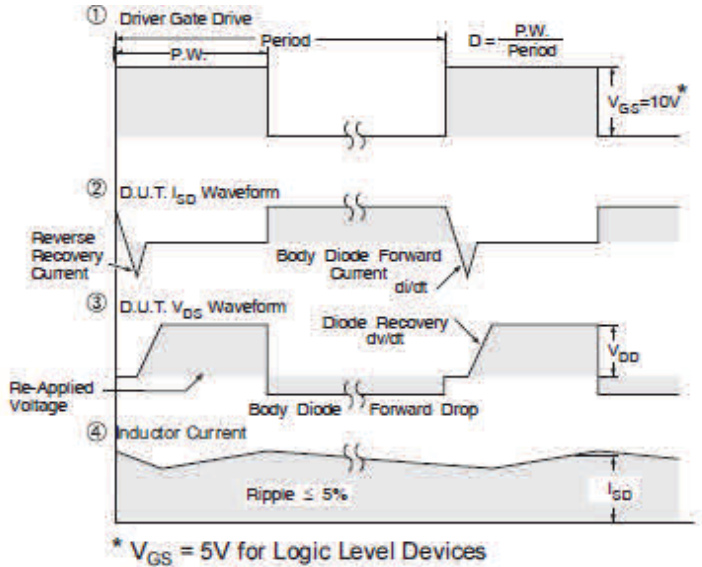
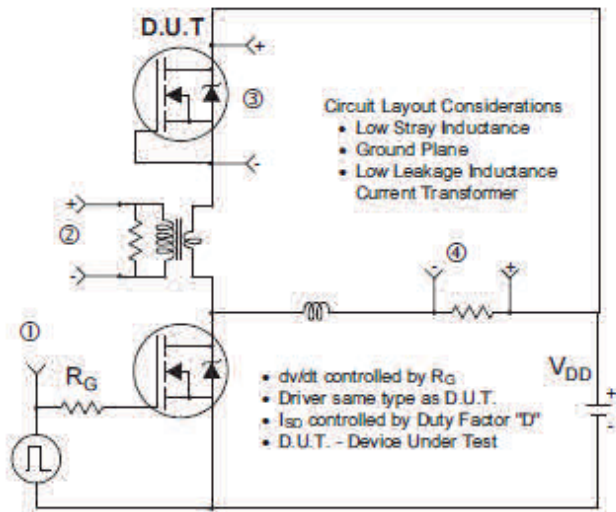
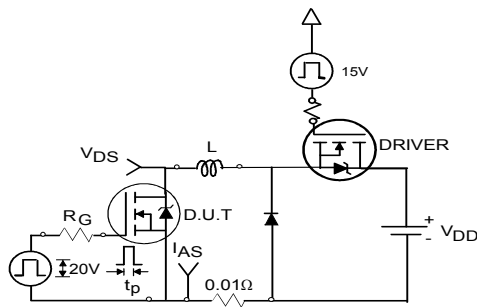
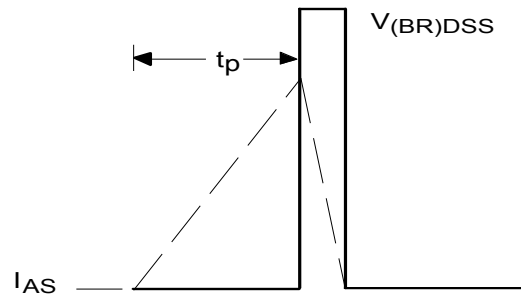
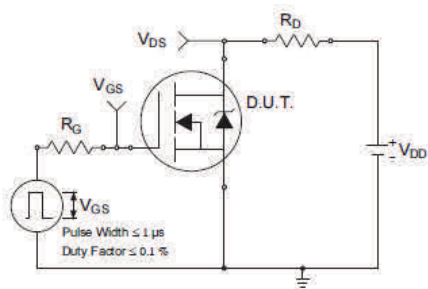
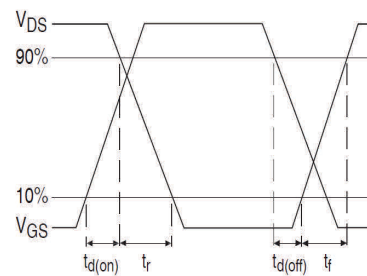
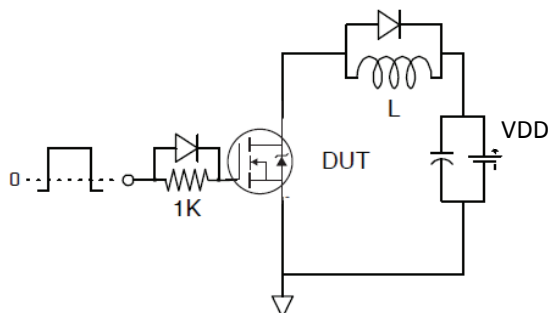
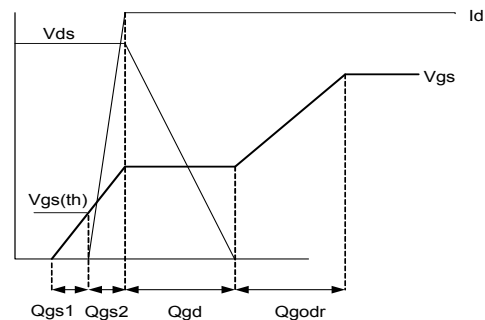
$$P_{D(ave)} = 1/2 ( 1.3 \cdot BV \cdot I_{av} ) = \Delta T / Z_{thJC}$$

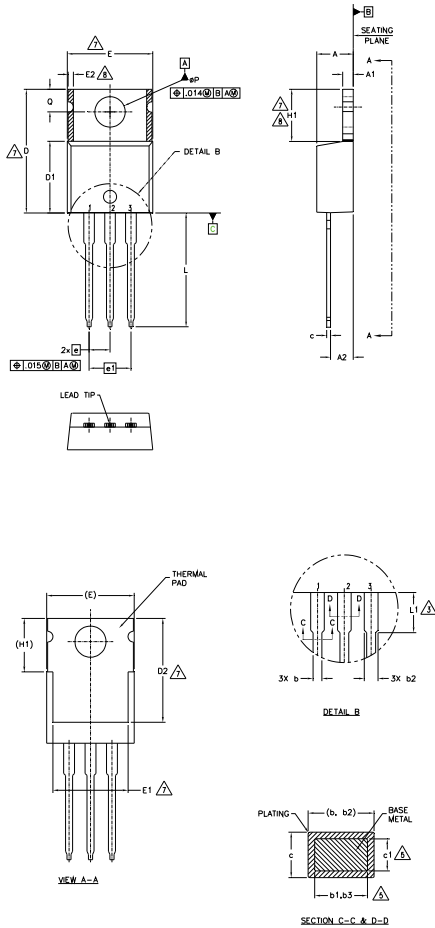
$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{th}]$$

$$E_{AS(AR)} = P_{D(ave)} \cdot t_{av}$$


**Fig 17.** Threshold Voltage vs. Temperature

**Fig 18.** Typical Recovery Current vs. dif/dt

**Fig 19.** Typical Recovery Current vs. dif/dt

**Fig 20.** Typical Stored Charge vs. dif/dt

**Fig 21.** Typical Stored Charge vs. dif/dt




**Fig 22. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs**

**Fig 23a. Unclamped Inductive Test Circuit**

**Fig 23b. Unclamped Inductive Waveforms**

**Fig 24a. Switching Time Test Circuit**

**Fig 24b. Switching Time Waveforms**

**Fig 25a. Gate Charge Test Circuit**

**Fig 25b. Gate Charge Waveform**

**TO-220AB Package Outline (Dimensions are shown in millimeters (inches))**

**NOTES:**

- 1.- DIMENSIONING AND TOLERANCING AS PER ASME Y14.5 M- 1994.
- 2.- DIMENSIONS ARE SHOWN IN INCHES [MILLIMETERS].
- 3.- LEAD DIMENSION AND FINISH UNCONTROLLED IN L1.
- 4.- DIMENSION D, D1 & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
- 5.- DIMENSION b1, b3 & c1 APPLY TO BASE METAL ONLY.
- 6.- CONTROLLING DIMENSION : INCHES.
- 7.- THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS E,H1,D2 & E1
- 8.- DIMENSION E2 X H1 DEFINE A ZONE WHERE STAMPING AND SINGULATION IRREGULARITIES ARE ALLOWED.
- 9.- OUTLINE CONFORMS TO JEDEC TO-220, EXCEPT A2 (max.) AND D2 (min.) WHERE DIMENSIONS ARE DERIVED FROM THE ACTUAL PACKAGE OUTLINE.

| SYMBOL | DIMENSIONS  |       |          |      | NOTES |
|--------|-------------|-------|----------|------|-------|
|        | MILLIMETERS |       | INCHES   |      |       |
|        | MIN.        | MAX.  | MIN.     | MAX. |       |
| A      | 3.56        | 4.83  | .140     | .190 |       |
| A1     | 1.14        | 1.40  | .045     | .055 |       |
| A2     | 2.03        | 2.92  | .080     | .115 |       |
| b      | 0.38        | 1.01  | .015     | .040 |       |
| b1     | 0.38        | 0.97  | .015     | .038 | 5     |
| b2     | 1.14        | 1.78  | .045     | .070 |       |
| b3     | 1.14        | 1.73  | .045     | .068 | 5     |
| c      | 0.36        | 0.61  | .014     | .024 |       |
| c1     | 0.36        | 0.56  | .014     | .022 | 5     |
| D      | 14.22       | 16.51 | .560     | .650 | 4     |
| D1     | 8.38        | 9.02  | .330     | .355 |       |
| D2     | 11.68       | 12.88 | .460     | .507 | 7     |
| E      | 9.65        | 10.67 | .380     | .420 | 4,7   |
| E1     | 6.86        | 8.89  | .270     | .350 | 7     |
| E2     | -           | 0.76  | -        | .030 | 8     |
| e      | 2.54 BSC    |       | .100 BSC |      |       |
| e1     | 5.08 BSC    |       | .200 BSC |      |       |
| H1     | 5.84        | 6.86  | .230     | .270 | 7,8   |
| L      | 12.70       | 14.73 | .500     | .580 |       |
| L1     | 3.56        | 4.06  | .140     | .160 | 3     |
| øP     | 3.54        | 4.08  | .139     | .161 |       |
| Q      | 2.54        | 3.42  | .100     | .135 |       |

**LEAD ASSIGNMENTS**
**HEXFET**

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE

**IGBTs, CoPACK**

- 1.- GATE
- 2.- COLLECTOR
- 3.- EMITTER

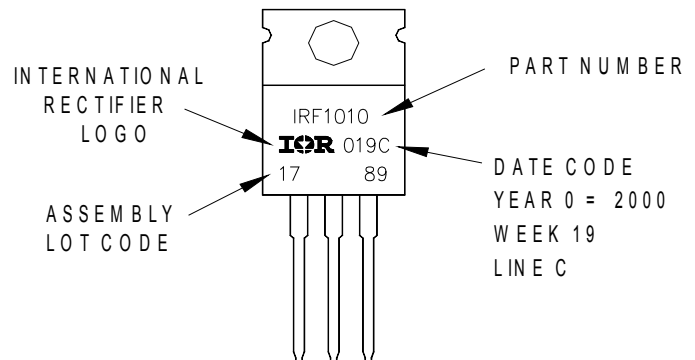
**DIODES**

- 1.- ANODE
- 2.- CATHODE
- 3.- ANODE

**TO-220AB Part Marking Information**

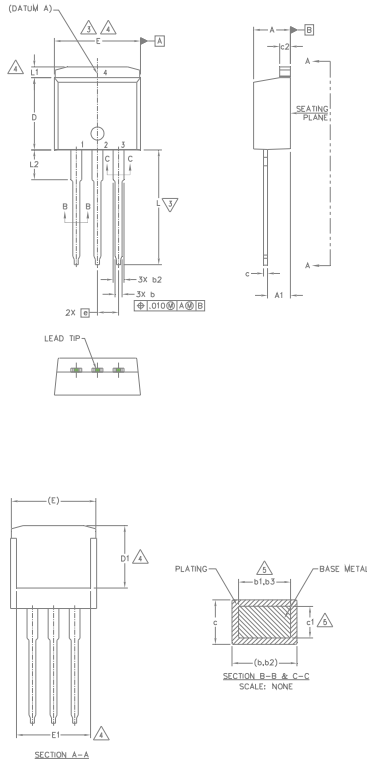
EXAMPLE: THIS IS AN IRF1010  
 LOT CODE 1789  
 ASSEMBLED ON WW 19, 2000  
 IN THE ASSEMBLY LINE "C"

Note: "P" in assembly line position  
 indicates "Lead - Free"



TO-220AB packages are not recommended for Surface Mount Application.

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**TO-262 Package Outline (Dimensions are shown in millimeters (inches))**


| SYMBOL | DIMENSIONS  |       |          |      | NOTES |
|--------|-------------|-------|----------|------|-------|
|        | MILLIMETERS |       | INCHES   |      |       |
|        | MIN.        | MAX.  | MIN.     | MAX. |       |
| A      | 4.06        | 4.83  | .160     | .190 | 5     |
| A1     | 2.03        | 3.02  | .080     | .119 |       |
| b      | 0.51        | 0.99  | .020     | .039 |       |
| b1     | 0.51        | 0.89  | .020     | .035 |       |
| b2     | 1.14        | 1.78  | .045     | .070 |       |
| b3     | 1.14        | 1.73  | .045     | .068 |       |
| c      | 0.38        | 0.74  | .015     | .029 |       |
| c1     | 0.38        | 0.58  | .015     | .023 |       |
| c2     | 1.14        | 1.65  | .045     | .065 |       |
| D      | 8.38        | 9.65  | .330     | .380 |       |
| D1     | 6.86        | -     | .270     | -    | 4     |
| E      | 9.65        | 10.67 | .380     | .420 | 3,4   |
| E1     | 6.22        | -     | .245     | -    | 4     |
| e      | 2.54 BSC    | -     | .100 BSC | -    |       |
| L      | 13.46       | 14.10 | .530     | .555 | 4     |
| L1     | -           | 1.65  | -        | .065 |       |
| L2     | 3.56        | 3.71  | .140     | .146 |       |

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
  2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES]
  3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 [0.005"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
  4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSION E, L1, D1 & E1.
  5. DIMENSION b1 AND c1 APPLY TO BASE METAL ONLY.
  6. CONTROLLING DIMENSION: INCH.
  - 7.- OUTLINE CONFORM TO JEDEC TO-262 EXCEPT A1(max.), b(min.) AND D1(min.) WHERE DIMENSIONS DERIVED THE ACTUAL PACKAGE OUTLINE.

**LEAD ASSIGNMENTS**
**IGBTs, CoPACK**

- 1.- GATE
- 2.- COLLECTOR
- 3.- EMITTER
- 4.- COLLECTOR

**HEXFET**

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE
- 4.- DRAIN

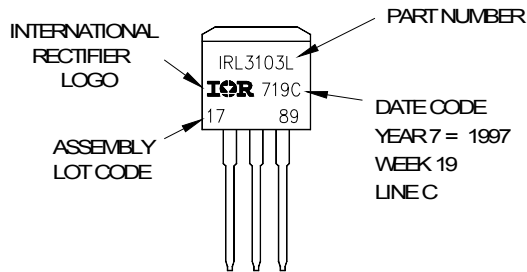
**DIODES**

- 1.- ANODE (TWO DIE) / OPEN (ONE DIE)
2. 4.- CATHODE
- 3.- ANODE

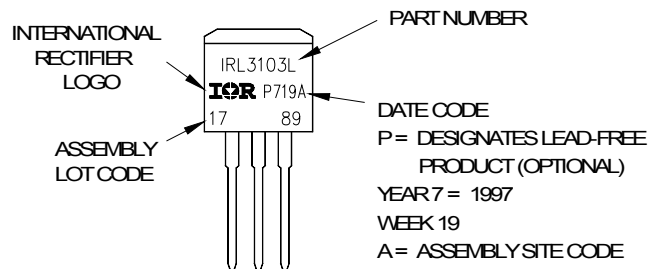
**TO-262 Part Marking Information**

EXAMPLE: THIS IS AN IRL3103L  
 LOT CODE 1789  
 ASSEMBLED ON VWV19, 1997  
 IN THE ASSEMBLY LINE "C"

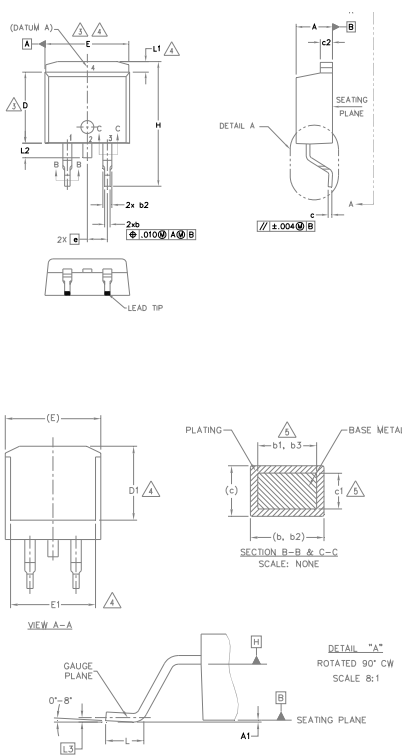
Note: "P" in assembly line position indicates "Lead - Free"



OR



Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**D<sup>2</sup>Pak (TO-263AB) Package Outline (Dimensions are shown in millimeters (inches))**


| SYMBOL | DIMENSIONS  |       |          |      | NOTES |
|--------|-------------|-------|----------|------|-------|
|        | MILLIMETERS |       | INCHES   |      |       |
|        | MIN.        | MAX.  | MIN.     | MAX. |       |
| A      | 4.06        | 4.83  | .160     | .190 | 5     |
| A1     | 0.00        | 0.254 | .000     | .010 |       |
| b      | 0.51        | 0.99  | .020     | .039 | 5     |
| b1     | 0.51        | 0.89  | .020     | .035 |       |
| b2     | 1.14        | 1.78  | .045     | .070 | 5     |
| b3     | 1.14        | 1.73  | .045     | .068 |       |
| c      | 0.38        | 0.74  | .015     | .029 | 5     |
| c1     | 0.38        | 0.58  | .015     | .023 |       |
| c2     | 1.14        | 1.65  | .045     | .065 | 3     |
| D      | 8.38        | 9.65  | .330     | .380 |       |
| D1     | 6.86        | -     | .270     | -    | 3,4   |
| E      | 9.65        | 10.67 | .380     | .420 |       |
| E1     | 6.22        | -     | .245     | -    | 4     |
| e      | 2.54 BSC    | -     | .100 BSC | -    |       |
| H      | 14.61       | 15.88 | .575     | .625 | 4     |
| L      | 1.78        | 2.79  | .070     | .110 |       |
| L1     | -           | 1.68  | -        | .066 | 4     |
| L2     | -           | 1.78  | -        | .070 |       |
| L3     | 0.25 BSC    | -     | .010 BSC | -    |       |

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
  2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
  3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 [".005"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY AT DATUM H.
  4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSION E, L1, D1 & E1.
  5. DIMENSION b1, b3 AND c1 APPLY TO BASE METAL ONLY.
  6. DATUM A & B TO BE DETERMINED AT DATUM PLANE H.
  7. CONTROLLING DIMENSION: INCH.
  8. OUTLINE CONFORMS TO JEDEC OUTLINE TO-263AB.

**LEAD ASSIGNMENTS**
**DIODES**

- 1.- ANODE (TWO DIE) / OPEN (ONE DIE)
- 2.- CATHODE
- 3.- ANODE

**HEXFET**

- 1.- GATE
- 2, 4.- DRAIN
- 3.- SOURCE

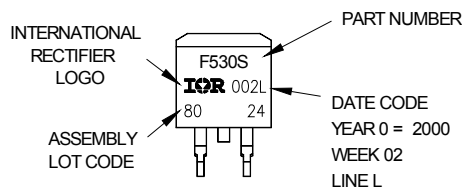
**IGBTs, CoPACK**

- 1.- GATE
- 2, 4.- COLLECTOR
- 3.- EMITTER

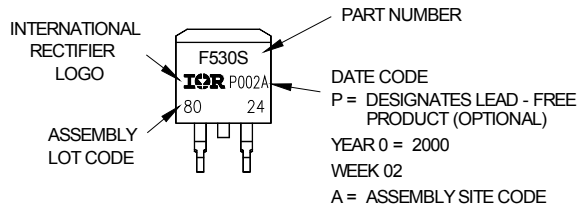
**D<sup>2</sup>Pak (TO-263AB) Part Marking Information**

EXAMPLE: THIS IS AN IRF530S WITH  
LOT CODE 8024  
ASSEMBLED ON VWV 02, 2000  
IN THE ASSEMBLY LINE "L"

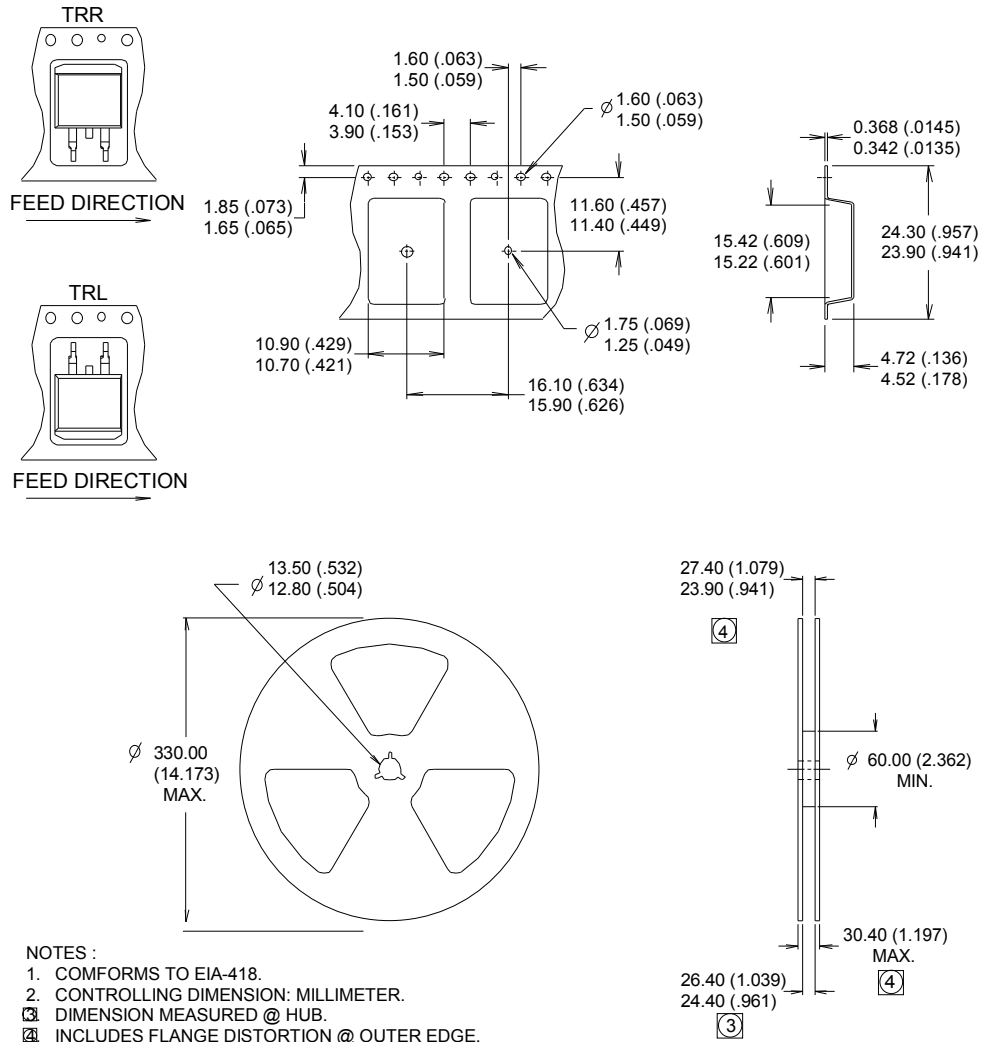
Note: "P" in assembly line position  
indicates "Lead - Free"



OR



Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**D<sup>2</sup>Pak (TO-263AB) Tape & Reel Information** (Dimensions are shown in millimeters (inches))


Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**Qualification Information<sup>†</sup>**

|                                   |   |      |
|-----------------------------------|---|------|
| <b>Qualification Level</b>        | Industrial<br>(per JEDEC JESD47F) <sup>††</sup> |      |
| <b>Moisture Sensitivity Level</b> | TO-220  | N/A  |
|                                   | D <sup>2</sup> Pak                              | MSL1 |
|                                   | TO-262  | N/A  |
| <b>RoHS Compliant</b>             | Yes   |      |

† Qualification standards can be found at International Rectifier’s web site: <http://www.irf.com/product-info/reliability/>

†† Applicable version of JEDEC standard at the time of product release.

**Revision History**

| <b>Date</b> | <b>Comments</b>   |
|-------------|---|
| 10/07/14    | <ul style="list-style-type: none"> <li>Updated <math>E_{AS(L=1mH)} = 554mJ</math> on page 2</li> <li>Updated note 9 “Limited by <math>T_{Jmax}</math>, starting <math>T_J = 25^{\circ}C</math>, <math>L = 1mH</math>, <math>R_G = 50\Omega</math>, <math>I_{AS} = 33A</math>, <math>V_{GS} = 10V</math>”. on page 2</li> <li>Updated package outline on page 9,10,11,12.</li> </ul> |