



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

International **IR** Rectifier

INSULATED GATE BIPOLEAR TRANSISTOR


PD -91580A

IRG4PH30K

Short Circuit Rated
UltraFast IGBT

Features


- High short circuit rating optimized for motor control, $t_{sc} = 10\mu s$, $V_{CC} = 720V$, $T_J = 125^\circ C$, $V_{GE} = 15V$
- Combines low conduction losses with high switching speed
- Latest generation design provides tighter parameter distribution and higher efficiency than previous generations

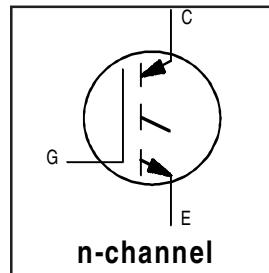

$V_{CES} = 1200V$
 $V_{CE(on)} \text{ typ.} = 3.10V$
@ $V_{GE} = 15V$, $I_C = 10A$

Benefits

- As a Freewheeling Diode we recommend our HEXFRED™ ultrafast, ultrasoft recovery diodes for minimum EMI / Noise and switching losses in the Diode and IGBT
- Latest generation 4 IGBT's offer highest power density motor controls possible
- This part replaces the IRGPH30K and IRGPH30M devices

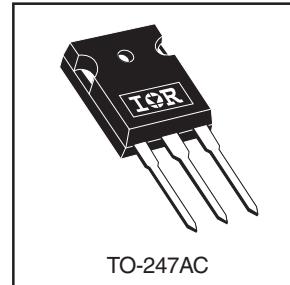

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Voltage	1200	V
$I_C @ T_C = 25^\circ C$	Continuous Collector Current	20	
$I_C @ T_C = 100^\circ C$	Continuous Collector Current	10	A
I_{CM}	Pulsed Collector Current ①	40	
I_{LM}	Clamped Inductive Load Current ②	40	
t_{sc}	Short Circuit Withstand Time	10	μs
V_{GE}	Gate-to-Emitter Voltage	± 20	V
E_{ARV}	Reverse Voltage Avalanche Energy ③	121	mJ
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	100	W
$P_D @ T_C = 100^\circ C$	Maximum Power Dissipation	42	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +150	$^\circ C$
	Soldering Temperature, for 10 sec.	300 (0.063 in. (1.6mm) from case)	
	Mounting torque, 6-32 or M3 screw.	10 lbf-in (1.1N·m)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	1.2	
$R_{\theta CS}$	Case-to-Sink, Flat, Greased Surface	0.24	—	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	—	40	
Wt	Weight	6 (0.21)	—	g (oz)

IRG4PH30K

International
Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{CES}}$	Collector-to-Emitter Breakdown Voltage	1200	—	—	V	$V_{\text{GE}} = 0\text{V}, I_C = 250\mu\text{A}$
$V_{(\text{BR})\text{ECS}}$	Emitter-to-Collector Breakdown Voltage ④	18	—	—	V	$V_{\text{GE}} = 0\text{V}, I_C = 1.0\text{A}$
$\Delta V_{(\text{BR})\text{CES}/\Delta T_J}$	Temperature Coeff. of Breakdown Voltage	—	0.19	—	V/ $^\circ\text{C}$	$V_{\text{GE}} = 0\text{V}, I_C = 2.0\text{mA}$
$V_{\text{CE}(\text{ON})}$	Collector-to-Emitter Saturation Voltage	—	3.10	4.2	V	$I_C = 10\text{A}$ $V_{\text{GE}} = 15\text{V}$
		—	3.90	—		$I_C = 20\text{A}$ See Fig.2, 5
		—	3.01	—		$I_C = 10\text{A}, T_J = 150^\circ\text{C}$
		3.0	—	6.0		$V_{\text{CE}} = V_{\text{GE}}, I_C = 250\mu\text{A}$
$\Delta V_{\text{GE}(\text{th})/\Delta T_J}$	Temperature Coeff. of Threshold Voltage	—	-12	—	mV/ $^\circ\text{C}$	$V_{\text{CE}} = V_{\text{GE}}, I_C = 250\mu\text{A}$
g_{fe}	Forward Transconductance ⑤	4.3	6.5	—	S	$V_{\text{CE}} = 100\text{V}, I_C = 10\text{A}$
I_{CES}	Zero Gate Voltage Collector Current	—	—	250	μA	$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 1200\text{V}$
		—	—	2.0		$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 10\text{V}, T_J = 25^\circ\text{C}$
		—	—	2000		$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 1200\text{V}, T_J = 150^\circ\text{C}$
I_{GES}	Gate-to-Emitter Leakage Current	—	—	± 100	nA	$V_{\text{GE}} = \pm 20\text{V}$

Switching Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	—	53	80	nC	$I_C = 10\text{A}$
Q_{ge}	Gate - Emitter Charge (turn-on)	—	9.0	14		$V_{\text{CC}} = 400\text{V}$ See Fig.8
Q_{gc}	Gate - Collector Charge (turn-on)	—	21	32		$V_{\text{GE}} = 15\text{V}$
$t_{d(\text{on})}$	Turn-On Delay Time	—	28	—	ns	$T_J = 25^\circ\text{C}$ $I_C = 10\text{A}, V_{\text{CC}} = 960\text{V}$ $V_{\text{GE}} = 15\text{V}, R_G = 23\Omega$
t_r	Rise Time	—	23	—		
$t_{d(\text{off})}$	Turn-Off Delay Time	—	200	300		
t_f	Fall Time	—	110	170		
E_{on}	Turn-On Switching Loss	—	0.64	—	mJ	Energy losses include "tail" See Fig. 9,10,14
E_{off}	Turn-Off Switching Loss	—	0.92	—		
E_{ts}	Total Switching Loss	—	1.56	2.4		
t_{sc}	Short Circuit Withstand Time	10	—	—	μs	$V_{\text{CC}} = 720\text{V}, T_J = 125^\circ\text{C}$ $V_{\text{GE}} = 15\text{V}, R_G = 23\Omega$
$t_{d(\text{on})}$	Turn-On Delay Time	—	27	—	ns	$T_J = 150^\circ\text{C},$ $I_C = 10\text{A}, V_{\text{CC}} = 960\text{V}$ $V_{\text{GE}} = 15\text{V}, R_G = 23\Omega$
t_r	Rise Time	—	26	—		
$t_{d(\text{off})}$	Turn-Off Delay Time	—	310	—		
t_f	Fall Time	—	330	—		
E_{ts}	Total Switching Loss	—	3.18	—	mJ	See Fig. 10,11,14
L_E	Internal Emitter Inductance	—	13	—	nH	Measured 5mm from package
C_{ies}	Input Capacitance	—	800	—	pF	$V_{\text{GE}} = 0\text{V}$ $V_{\text{CC}} = 30\text{V}$ See Fig. 7 $f = 1.0\text{MHz}$
C_{oes}	Output Capacitance	—	60	—		
C_{res}	Reverse Transfer Capacitance	—	14	—		

Notes:

- ① Repetitive rating; $V_{\text{GE}} = 20\text{V}$, pulse width limited by max. junction temperature. (See fig. 13b)
- ② $V_{\text{CC}} = 80\%(V_{\text{CES}})$, $V_{\text{GE}} = 20\text{V}$, $L = 10\mu\text{H}$, $R_G = 23\Omega$, (See fig. 13a)
- ③ Repetitive rating; pulse width limited by maximum junction temperature.
- ④ Pulse width $\leq 80\mu\text{s}$; duty factor $\leq 0.1\%$.
- ⑤ Pulse width $5.0\mu\text{s}$, single shot.

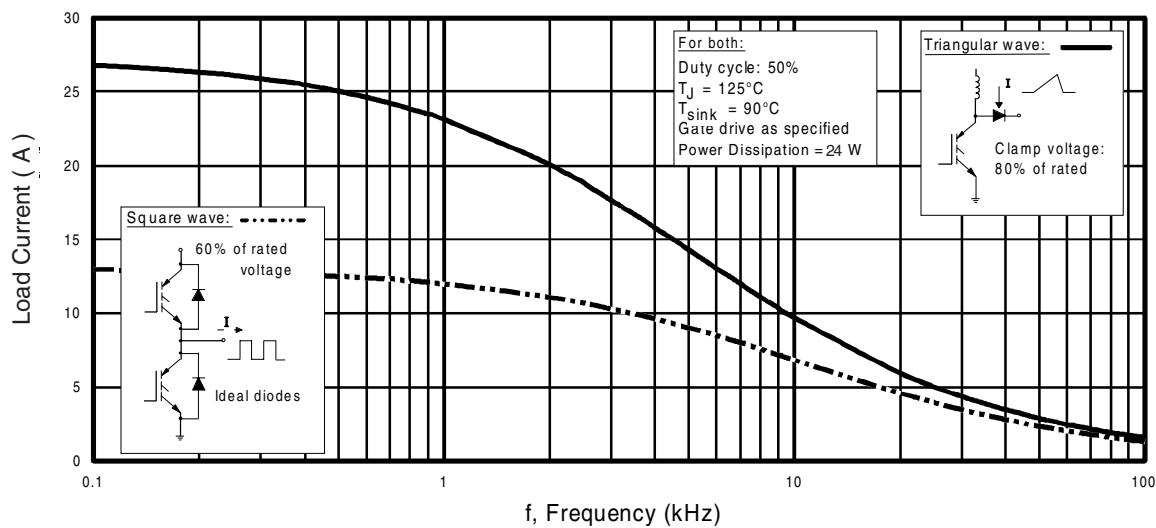


Fig. 1 - Typical Load Current vs. Frequency
 (Load Current = I_{RMS} of fundamental)

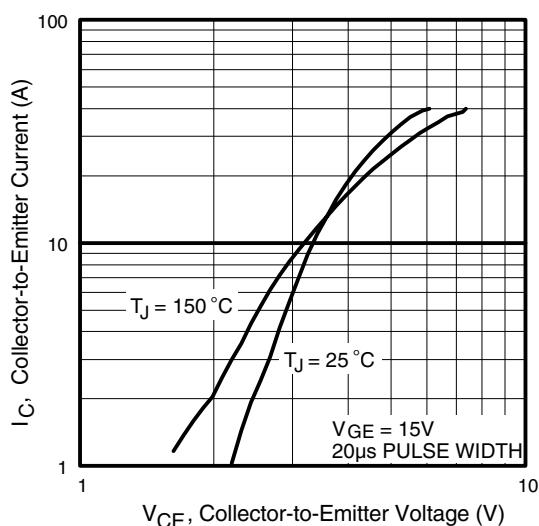


Fig. 2 - Typical Output Characteristics

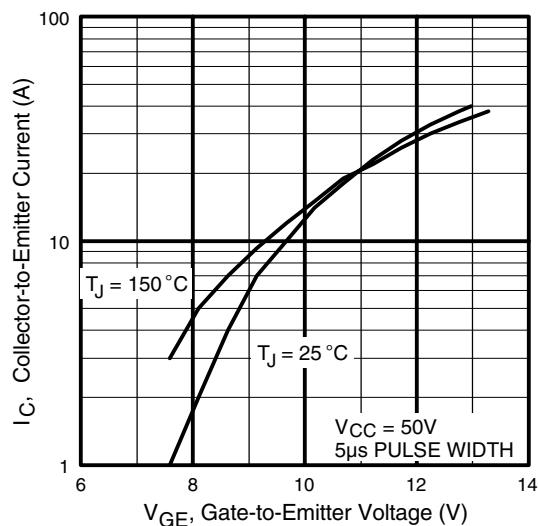


Fig. 3 - Typical Transfer Characteristics

IRG4PH30K

International
IR Rectifier

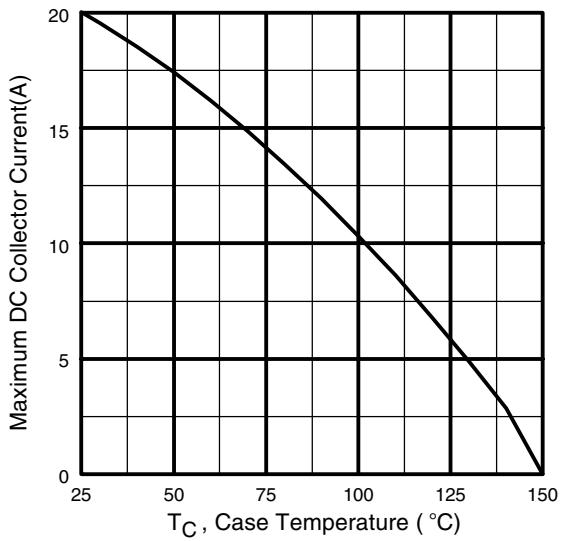


Fig. 4 - Maximum Collector Current vs. Case Temperature

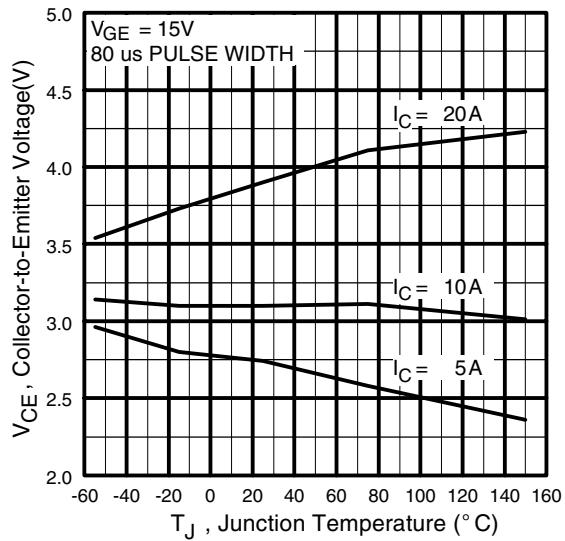


Fig. 5 - Typical Collector-to-Emitter Voltage vs. Junction Temperature

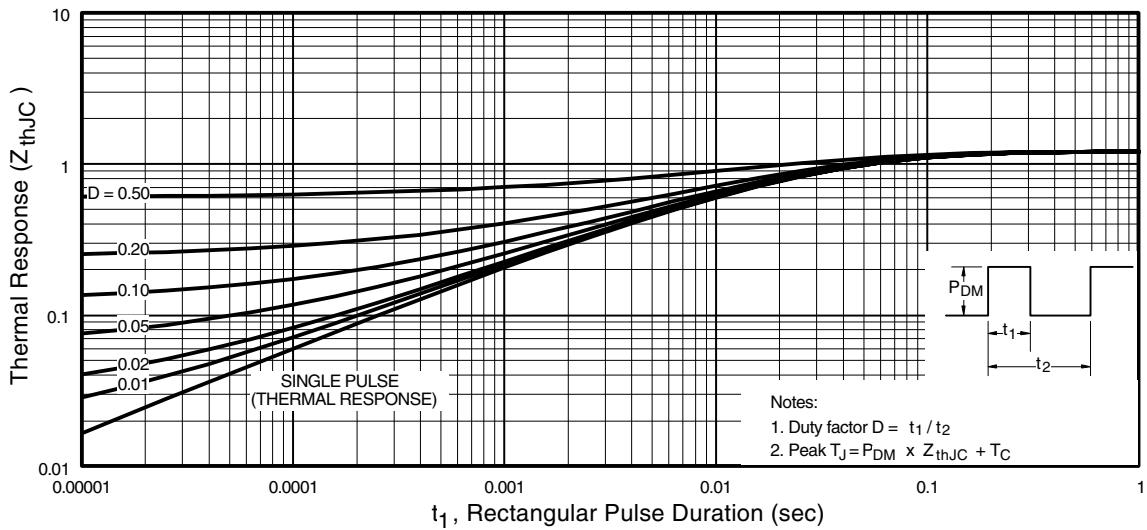


Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

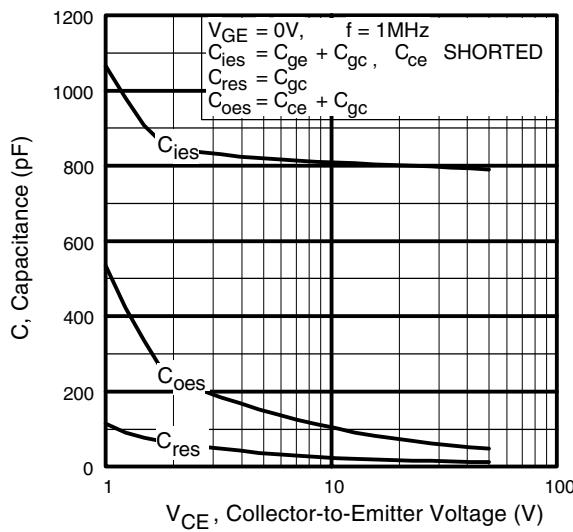


Fig. 7 - Typical Capacitance vs.
Collector-to-Emitter Voltage

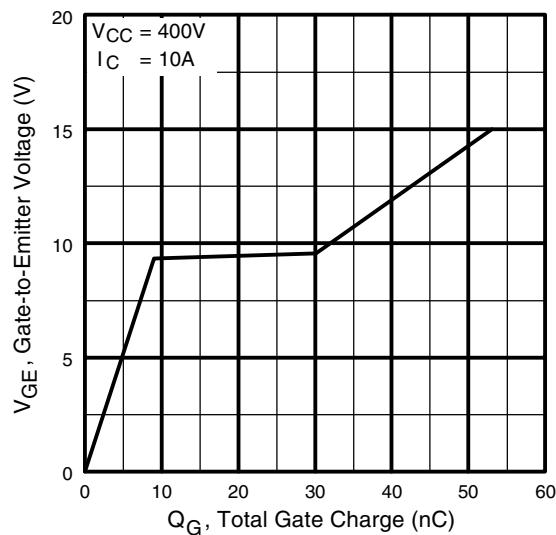


Fig. 8 - Typical Gate Charge vs.
Gate-to-Emitter Voltage

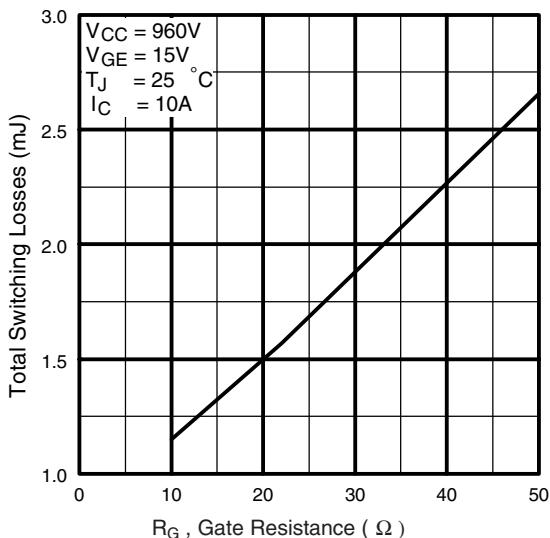


Fig. 9 - Typical Switching Losses vs. Gate
Resistance

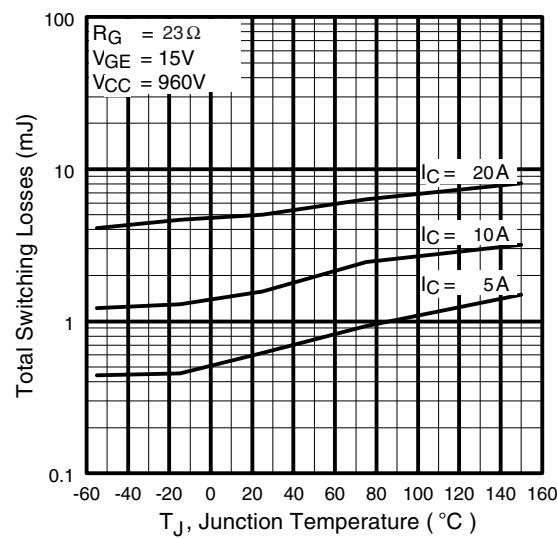


Fig. 10 - Typical Switching Losses vs.
Junction Temperature

IRG4PH30K

International
IR Rectifier

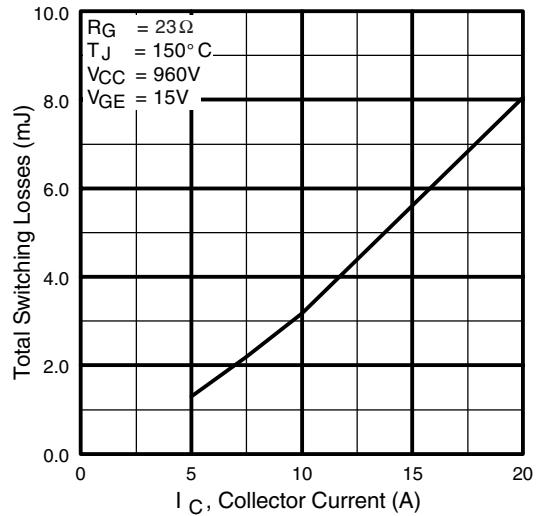


Fig. 11 - Typical Switching Losses vs.
Collector-to-Emitter Current

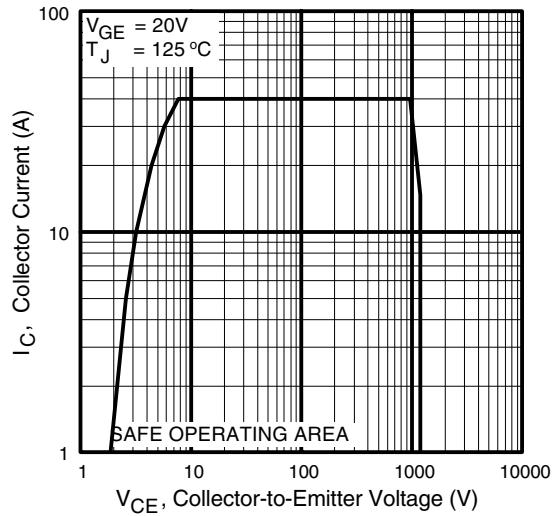


Fig. 12 - Turn-Off SOA

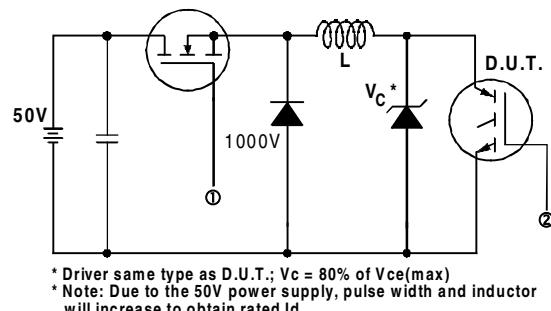


Fig. 13a - Clamped Inductive Load Test Circuit

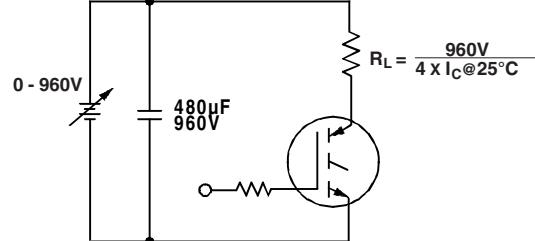


Fig. 13b - Pulsed Collector Current Test Circuit

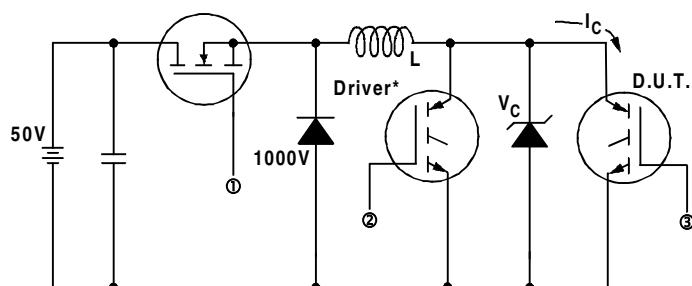


Fig. 14a - Switching Loss Test Circuit

* Driver same type as D.U.T., $V_C = 960V$


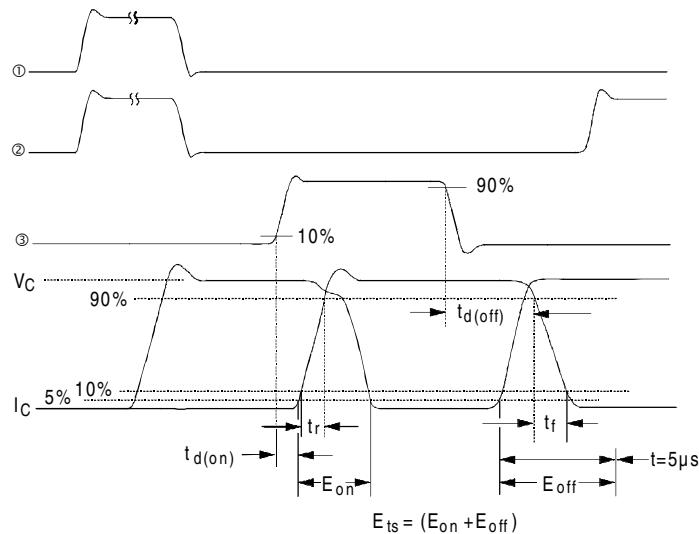


Fig. 14b - Switching Loss Waveforms

IRG4PH30K

International
IR Rectifier

Case Outline and Dimensions — TO-247AC

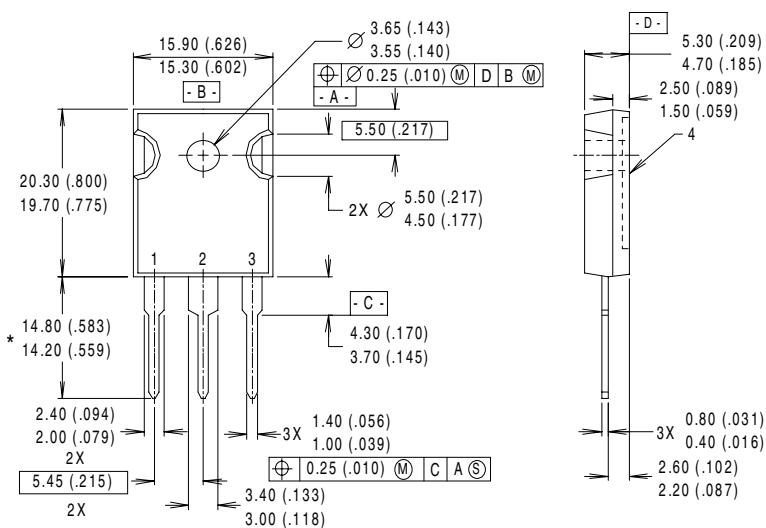

NOTES:

- 1 DIMENSIONS & TOLERANCING
PER ANSI Y14.5M, 1982.
 - 2 CONTROLLING DIMENSION : INCH.
 - 3 DIMENSIONS ARE SHOWN
MILLIMETERS (INCHES).
 - 4 CONFORMS TO JEDEC OUTLINE
TO-247AC.

LEAD ASSIGNMENTS

- 1 - GATE
2 - COLLECTOR
3 - Emitter
4 - COLLECTOR

* LONGER LEADED (20m.m)
VERSION AVAILABLE (TO-247AD)
TO ORDER ADD "-E" SUFFIX
TO PART NUMBER

CONFORMS TO JEDEC OUTLINE TO-247AC (TO-3P)

Dimensions in Millimeters and (Inches)

International
IS&R Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
IR EUROPEAN REGIONAL CENTRE: 439/445 Godstone Rd, Whyteleafe, Surrey CR3 OBL, UK Tel: ++ 44 (0)20 8645 8000
IR CANADA: 15 Lincoln Court, Brampton, Ontario L6T3Z2, Tel: (905) 453 2200
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 (0) 6172 96590
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 011 451 0111
IR JAPAN: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo 171 Tel: 81 (0)3 3983 0086
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994 Tel: ++ 65 (0)838 4630
IR TAIWAN: 16 Fl. Suite D. 207, Sec. 2, Tun Haw South Road, Taipei, 10673 Tel: 886-(0)2 2377 9936
Data and specifications subject to change without notice. 6/00

Note: For the most current drawings please refer to the IR website at:
<http://www.irf.com/package/>