

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










ENERGIZER LA522


Advanced Lithium




Industry Standard Dimensions

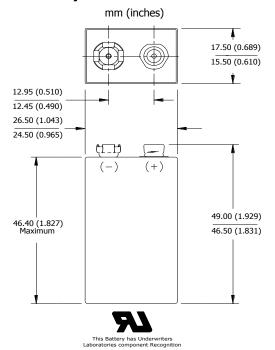

Typical Discharge Performance (21°C)

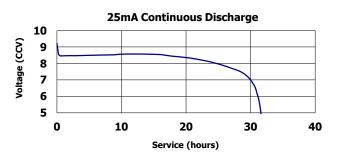

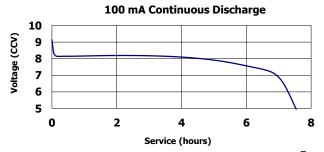

Specifications

Classification: Lithium 9V

Chemical System: Lithium-Manganese Dioxide (Li/MnO₂)

Designation: ANSI-1604LC **Nominal Voltage:** 9.0 volts

-40°C to 60°C (-40°F to 140°F) **Operating Temp:** -40°C to 60°C (-40°F to 140°F) Storage Temp:

Max Discharge: 1000 mA continuous

Safety Features: Positive Temperature Coefficient Switch (PTC)

Burst Proof Venting Holes

Typical Weight: 33.9 grams (1.2 oz.)


Typical Volume: 21.4 cubic centimeters (1.3 cubic inch)


Jacket: Plastic Label Terminal: Miniature Snap Shelf Life: 10 Years

Typical Li Content: 1.35 grams (0.048 oz.)


UL/UN Listed: MH47482

Milliamp-Hours Performance (21°C)

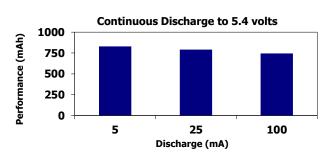

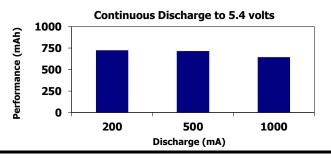

500 mA Continuous Discharge

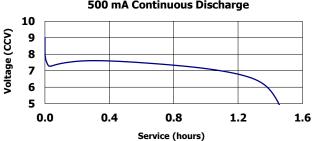

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication. ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

Form No. EBC - 4217 Page 1 of 1