



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

LLSD101A THRU LLSD101C

Features

- Guard Ring Construction for Transient Protection
- Low Reverse Capacitance
- Low Forward Voltage Drop and Low Reverse Recovery Time
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates Compliant. See ordering information)

Mechanical Data

- Case: MiniMELF, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Indicated by Cathode Band
- Weight: 0.05 grams (approx.)

Maximum Ratings @25°C Unless Otherwise Specified


Characteristic	Symbol	LLSD101A	LLSD101B	LLSD101C
Peak Repetitive Reverse Voltage	V_{RRM}			
Working Peak Reverse Voltage	V_{RWM}	60V	50V	40V
DC Blocking Voltage	V_R			
RMS Reverse Voltage	$V_{R(RMS)}$	42V	35V	28V
Forward Continuous Current(Note 2)	I_{FM}	15mA		
Non-Repetitive Peak @ $t \leq 1.0s$ Forward Surge Current @ $t = 10\mu s$	I_{FSM}	50mA 2.0A		
Power Dissipation(Note 2)	P_d	400mW		
Thermal Resistance(Note 2)	R	375K/W		
Operation & Storage Temp. Range	T_j, T_{STG}	-55 to 150°C		

Electrical Characteristics @25°C Unless Otherwise Specified


Characteristic	Symbol	Min	Max	Unit	Test Cond.
Peak Reverse Current	I_{RM}	-----	200	nA	$V_R = 50V$ $V_R = 40V$ $V_R = 30V$
Forward Volt. Drop	V_{FM}	-----	0.41 0.40 0.39 1.00 0.95 0.90	V	$I_F = 1.0mA$ $I_F = 1.0mA$ $I_F = 1.0mA$ $I_F = 15mA$ $I_F = 15mA$ $I_F = 15mA$
Junction Capacitance	C_j	-----	2.0 2.1 2.2	pF	$V_R = 0V, f = 1.0MHz$
Reverse Recovery Time	t_{rr}	-----	1.0	ns	$I_F = I_R = 5mA,$ recover to $0.1 I_R$

Note:1.Lead in Glass Exemption Applied, see EU Directive Annex 5.
2.Valid provided that electrodes are kept at ambient temperature


Schottky Barrier Switching Diode

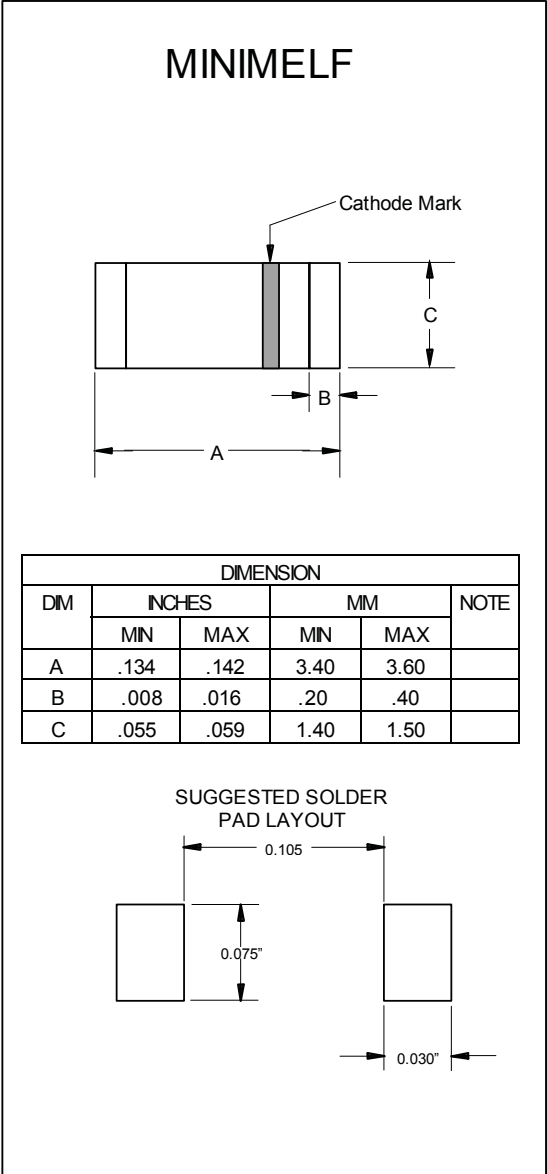

LLSD101A thru LLSD101C

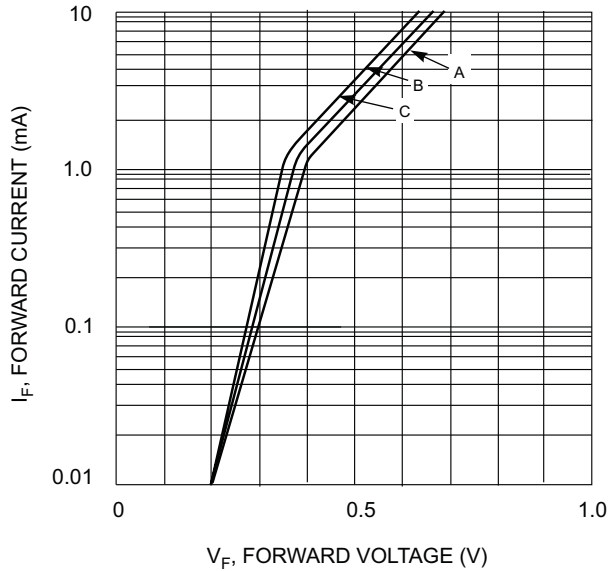

V_F , FORWARD VOLTAGE (V)
 Fig. 1 Typical Forward Characteristic Variations for Primary Conduction

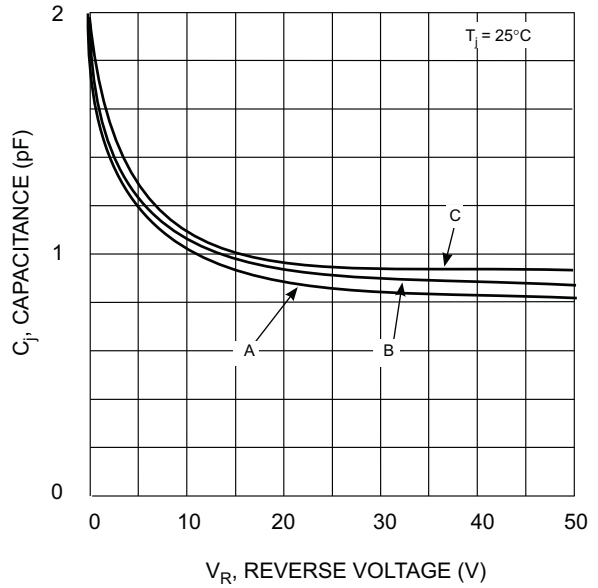

V_R , REVERSE VOLTAGE (V)
 Fig. 2 Typ. Junction Capacitance vs Reverse Voltage



Micro Commercial Components TM

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;2.5Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.