



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



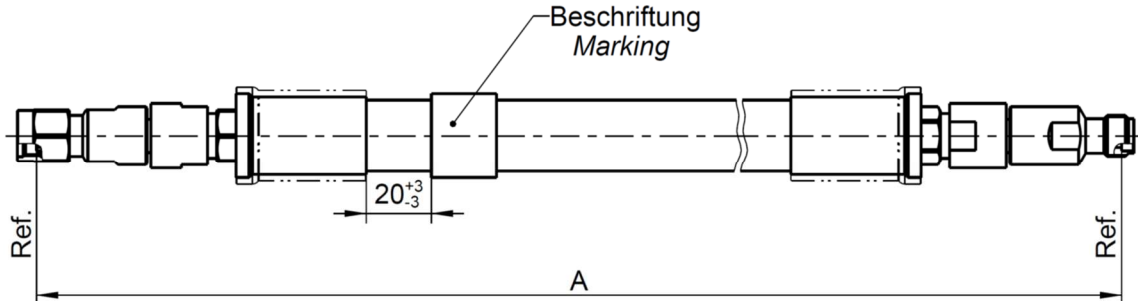

All dimensions are in mm; tolerances: ± 3 mm for $A \leq 300$ mm; $\pm 1\%$ for $A > 300$ mm
*) If length "A" < 150 mm marking is mount centric ± 5 mm

Available variants

Type	max. Insertion loss at 26.5 GHz	Marking	Weight (g) / pce
LU7-308-XXX	$\leq 0.00203 \text{ dB/mm} * A \text{ mm} + 0.40 \text{ dB}$	ROSENBERGER YYY-YY LU7-308-XXX FAC-RRRRRRR ssss	$0.925 \text{ g/mm} * A \text{ mm} + 31.2 \text{ g}$

XXX – length in mm = A Standard lengths: 500, 1000, 1500, 2000mm
WW – week YYYY – year ssss – serial no. FAC – Factory Code RRRRRRR – lot nr.

Note: max. Insertion Loss:
First constant = Cable attenuation in dB /mm; Second Constant = Connector left and Connector right +needed Adaptor

Weight:
First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left	RPC-3.50 plug	03S122-2U7S3
Connector right	RPC-3.50 jack	03K122-2U7S3
Cable	RTK 162	
Armour	Polyurethane jacket over braid / stainless steel spiral	

Electrical data

Impedance	50 Ω
Frequency	DC to 26.5 GHz
Return loss ¹	$\geq 19 \text{ dB}$, DC to 26.5 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:
Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed. Measurement adaptors used are mentioned in the commentary field.

¹ Return Loss and Insertion Loss includes the measurement adaptor

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/09;14/6.2

Technical Data Sheet

Rosenberger

Cable assembly - Standardportfolio
RPC-3.50 Plug / RPC-3.50 Jack – RTK 162 Cable

LU7-308-XXX

Mechanical data

Minimum bend radius:
Single 25.5 mm
Multiple 50 mm

Environmental data

Temperature range -40°C to +80°C
RoHS compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	25/04/18	Florian Reiner	04/05/18	b00	18-s170	Walter Schmied	02/05/18

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de	Tel. : +49 8684 18-0 Email : info@rosenberger.de	Page 2 / 2
--	--	---------------