



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## MA3110 CAT IV TRMS 3000A AC Flexible Clamp Meter

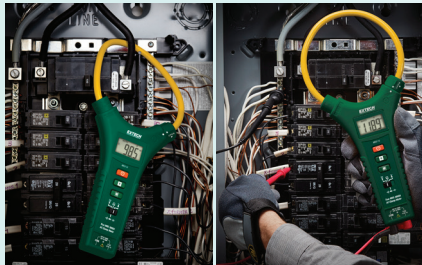


Flexible 11" (28cm) clamp jaw easily wraps around bus bars and cable bundles that may be difficult to access with regular clamp meters. The thin 8mm cable diameter easily fits into tight spaces. Includes test leads for multimeter functions measuring Voltage, Resistance, and Capacitance. True RMS and CAT IV rated allows for maximum accuracy and safety for your measurements.



### Features

- True RMS for accurate readings of noisy, distorted or non-sinusoidal waveforms
- Autoranging AC Current
- 8mm cable diameter fits into tight spaces and around large conductors
- 6000 count LCD display
- Data Hold freezes reading on display
- Over range and Low battery indicator
- Auto power off with disable
- CAT III-1000V, CAT IV-600V category safety rating
- Complete with test leads and two AAA batteries



Specifications	Ranges	Max Resolution	Basic Accuracy
AC Current	600A, 3000A	0.1A, 1A	±1%
AC Voltage	6, 60, 600, 1000V	0.001V	±1%
DC Voltage	6, 60, 600, 1000V	0.001V	±0.8%
Resistance	600, 6k, 60k, 600k, 6M, 60MΩ	0.1Ω	±1.5%
Capacitance	6nF, 60nF, 600nF, 6μF, 60μF, 600μF	0.001nF	±3%
Diode/Continuity	Yes		
Dimensions	11.4 x 5.3 x 1.1" (290 x 135 x 27.8mm)		
Weight	7.3oz (208g) w/o batteries		

### Ordering

MA3110 ..... CAT IV True RMS 3000A AC Flex Clamp Meter (11" clamp cable)



UPC Code: 793950373132