



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ALD500/ALD523D Chipset

A/D Converter-Display Module Controller

The ALD500/523D chipset is a precision 18-bit plus sign bit dual-slope integrating analog/digital converter. Designed as an analog/digital 2-chip chipset to minimize mixed signal crosstalk and noise, this A/D converter and display module controller combination is unique to the industry. The ALD500 analog chip or optional ALD500R functions as the dual-slope integrator — the latter incorporates an on-chip precision voltage reference. The digital chip, ALD523D is a dedicated controller I.C. designed to conveniently interface with a variety of LCD/VFD multiline alphanumeric character display modules. The ALD523D features multi-function control inputs for a broad range of user selectable functions, including up to 3 separate display settings. The ALD523D also features power-down (sleep mode), chip select and integration time select. Combined, the chipset offers designers an immediate solution to an otherwise complex engineering task that would generally require extensive development effort using discrete components.

The chipset is primarily intended for precision embedded display applications including embedded digital panel meters, customized/specialized instrument displays, temperature monitoring, high resolution voltmeters, signal conditioners, laboratory datalogging, process monitors, and DVM for portable/field troubleshooting and calibration systems. Full-scale analog input range is ± 2.00000 VDC with a linearity of 0.005%. Up to 7 full digits can be displayed as an A/D converter measurement value.

Configured for maximum user flexibility, the ALD523D controller chip can be operated in 3 user selectable application specific functional modes; Mode A - calibrated reference, Mode B - ratiometric, and Mode C - display only. Mode A is used primarily for measurements against a calibrated reference voltage typically required in precision voltmeter applications. Mode B is intended for measurements against a ratiometric reference voltage such as those required in weigh scale applications. Mode C is used for display applications where the input data is already formatted in industry standard serial binary from other microprocessors or data converters - up to 32 serial bits including a sign bit. In Mode C, only the digital ALD523D chip is required.

In addition to the three modes of operation, up to three separate display group settings are available, each with different scale factors and UNIT displays. For applications such as embedded measurement instrument modules, up to three separate ranges of a single measurement can be preset, selected and displayed. Both software and hardware based settings are available for setting a variety of parameters such as Samples Averaging, Decimal Placement, Digits Blanking, Zero Level, Display Group Setting, Mode Selection, UNIT Labeling, and Calibration.

www.aldinc.com



Chipset consisting of ALD500 Integrating Analog Processor and ALD523D Display Module Controller

Features

- Up to 7 full digits plus sign (± 9999999) display
- Stand alone display module control operation.
- Up to 3 separate DISPLAY settings.
- Compatible with industry standard 1-line or 2-line x 16 character display module such as LCD or VFD
- $\pm 3V$ to $\pm 5V$ power supply.
- Accepts most industry standard serial inputs up to 32-bits, including sign bit.
- 3 selectable operating modes.
- PC based software included for calibration and initial setup.

Software

Standard PC setup/calibration software is provided for use with the chipset. This software is used to initially configure the ALD523D controller chip in any of the 3 operating modes, as well as to perform system calibration and to establish user-defined alphanumeric "TITLE and UNIT fields" for the display module, which are stored in an external EEPROM. Communications between the ALD523D and PC are performed over the parallel printer port.



ADVANCED
LINEAR
DEVICES, INC.

Product Applications

- Embedded precision digital display
- High-resolution DC voltmeter
- High accuracy and low noise weigh scale system
- Precision PH measurement system
- Stand-alone display interface controller
- External serial data display module
- Hi-res A/D converter with alphanumeric display interface
- Temperature monitoring system

ALD523D Specifications*

- Power Supply
Voltage: 3-5 Vdc (5.5 Vdc max)
Current: 6 mA typical
- Input
Low: -0.3 - 1.0 V
High: 3.5 - 5.3 V
- Output
Low: 0.1 - 0.5 V
High: 3.6 - 4.8 V
- Oscillator
Crystal Freq: 3.6864 MHz typical
Ext Freq: 15 MHz max

ALD523D Packaging

- ALD523DPH 28-Pin plastic (PDIP)
- ALD523DSH 28-Pin small outline (SOIC)

ALD523D Operating Temp. Range

- 0 degree to 70 degrees C
(Optional industrial grade also available)

Ordering Information *

Evaluation and Board Level Product

Part No.	Description
MB203PDK	PDIP Design Kit
MB203SDK	SOIC Design Kit
MB203PCB	Printed Circuit Board

Chipset I.C. Product (recommended)


Part No.	Operating Mode
ALD500AUPC	Mode A, B
ALD500RAU-10PE	Mode A
ALD523DPH	Mode A, B & C

* For special requirements such as different package type, grade selection, please refer to individual data sheet or contact factory.

Advanced Linear Devices, Inc. develops and manufactures a full line of precision CMOS linear integrated circuits, including analog switches, A/D converters, voltage comparators, operational amplifiers, conventional and EPAD[®] MOSFET transistors.

Most standard devices are available as ASIC cells for the development of semi-custom integrated circuits.

ALD also serves customers through expertise in full custom design engineering, including device and process development.

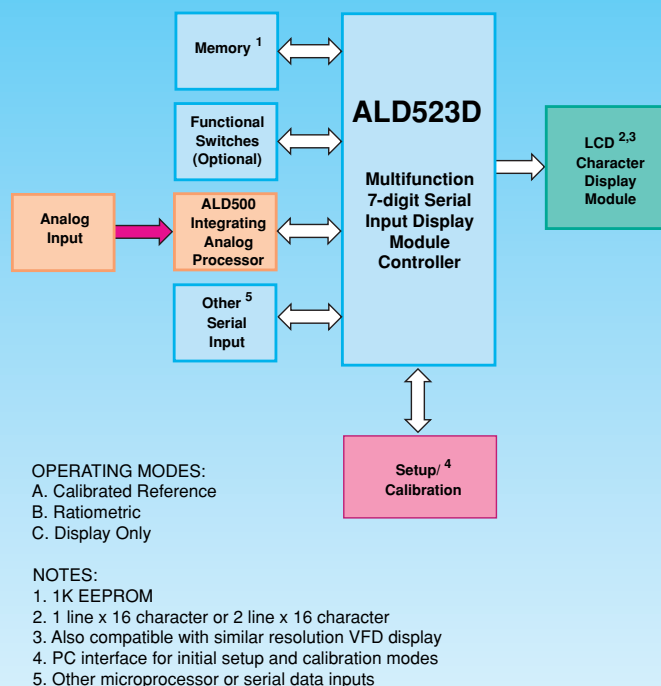

Chipset Functional Block Diagram