



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Part Number: MS15 15004

Ordering Different Lead Types:

Inside Kinked Leads	Use -A after Ametherm's part #
Outside Kinked Leads	Use -B after Ametherm's part #

For example: to order an inside kinked lead use part number MS15 15004-A

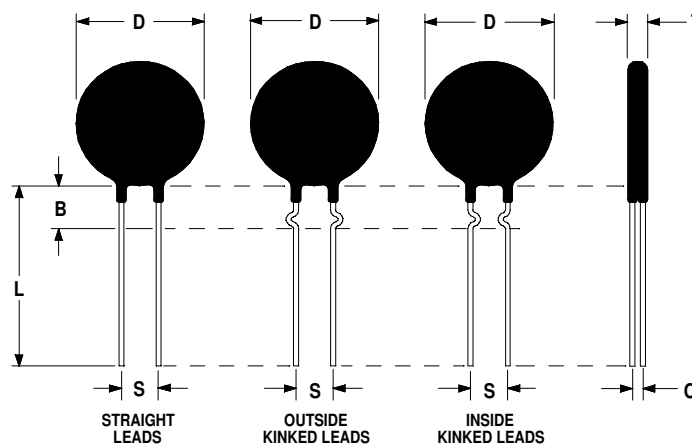

Electrical Specifications:

Resistance @ 25°C	15.0 Ω ± 25%
Max Steady State Current Up to 65°C	4.5A
Max Recommended Energy Rating (Joules)	155.0 J
Actual Failure Point of Instantaneous Energy (Joules)	310.0 J
Resistance @ 100% of Max Current	0.200 Ω
Resistance @ 50% of Max Current	0.850 Ω
Body Temperature @ 100% Current Rating	144 °C
Dissipation Constant	49.4mW/°C
Thermal Time Constant	114 seconds
Material Type	"G"
Max Recommended Capacitance @120/240/440VAC	10500µF/2600µF/ 800µF

Mechanical Specifications:

D	15.0 ± 1.0 mm
T	7.0 ± 0.7 mm
Lead Diameter	1.0 ± 0.1 mm
S	7.8 ± 2.0 mm
L	38.0 ± 9.0 mm
Straight Leads Coating Run Down	5.0 ± 1.0 mm
B	6.30 ± 0.60 mm
C	6.50 ± 0.60 mm

Revision Date: March 19, 2003

Ametherm, Inc. 3111 N. Deer Run Road #4 Carson City, NV 89701
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

www.ametherm.com