



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Micro Commercial Components



Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**MT25CB08T1**  
**MT25CB12T1**  
**MT25CB16T1**  
**MT25CB18T1**

## Features


- Lead Free Finish/RoHS Compliant (NOTE 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- International standard package
- Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- Glass passivated chip
- Simple Mounting

## Applications

- Power Converters
- Lighting Control
- DC Motor Control and Drives
- Heat and temperature control





**Circuit**

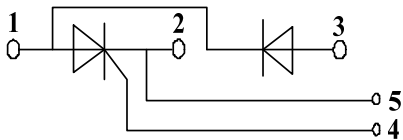

**25 Amp**  
**THYRISTOR/DIODE**  
**MODULE**  
**800~1800 Volts**

T1

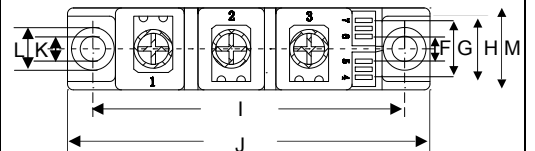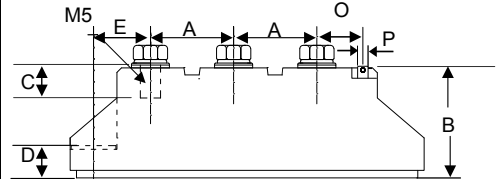

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.776	.799	19.70	20.30	
B	1.169	1.193	29.70	30.30	
C	.343	.366	8.70	9.30	
D	.323	.346	8.20	8.80	
E	.602	.622	15.30	15.80	
F	.224	.248	5.70	6.30	
G	.539	.563	13.70	14.30	
H	.657	.681	16.70	17.30	
I	3.138	3.161	79.70	80.30	
J	3.650	3.673	92.70	93.30	
K		.256		6.50	∅
L	.421	.445	10.70	11.30	
M	.815	.839	20.70	21.30	
O	.579	.602	14.70	15.30	
P	0.11X0.032		2.8X0.8		

## Module Type

TYPE	VRRM	VRSM
MT25CB08T1	800V	900V
MT25CB12T1	1200V	1300V
MT25CB16T1	1600V	1700V
MT25CB18T1	1800V	1900V

## ◆ Diode

### Maximum Ratings

Symbol	Item	Conditions	Values	Units
I <sub>D</sub>	Output Current(D.C.)	T <sub>c</sub> =85°C	25	A
I <sub>FSM</sub>	Surge forward current	t=10mS T <sub>vj</sub> =45°C	550	A
i <sup>2</sup> t	Circuit Fusing Consideration		1500	A <sup>2</sup> s
Visol	Isolation Breakdown Voltage(R.M.S)	a.c.50HZ;r.m.s.;1min	3000	V
T <sub>vj</sub>	Operating Junction Temperature		-40 to +125	°C
T <sub>stg</sub>	Storage Temperature		-40 to +125	°C
M <sub>t</sub>	Mounting Torque	To terminals(M5)	3±15%	Nm
M <sub>s</sub>		To heatsink(M6)	5±15%	Nm
Weight	Module (Approximately)		100	g

### Thermal Characteristics

Symbol	Item	Conditions	Values	Units
R <sub>th(j-c)</sub>	Thermal Impedance, max.	Junction to Case	0.45	°C/W
R <sub>th(c-s)</sub>	Thermal Impedance, max.	Case to Heatsink	0.10	°C/W

### Electrical Characteristics

Symbol	Item	Conditions	Values			Units
			Min.	Typ.	Max.	
V <sub>FM</sub>	Forward Voltage Drop, max.	T=25°C I <sub>F</sub> =75A			1.80	V
I <sub>RRM</sub>	Repetitive Peak Reverse Current, max.	T <sub>vj</sub> =25°C V <sub>RD</sub> =V <sub>RRM</sub> T <sub>vj</sub> =125°C V <sub>RD</sub> =V <sub>RRM</sub>	≤0.5 ≤6			mA mA

## ◆Thyristor

### Maximum Ratings

Symbol	Item	Conditions	Values	Units
$I_{TAV}$	Average On-State Current	Sine 180°; $T_c=85^\circ\text{C}$	25	A
$I_{TSM}$	Surge On-State Current	$T_{VJ}=45^\circ\text{C}$ $t=10\text{ms}$ , sine $T_{VJ}=125^\circ\text{C}$ $t=10\text{ms}$ , sine	550 480	A
$i^2t$	Circuit Fusing Consideration	$T_{VJ}=45^\circ\text{C}$ $t=10\text{ms}$ , sine $T_{VJ}=125^\circ\text{C}$ $t=10\text{ms}$ , sine	1500 1150	$\text{A}^2\text{s}$
Visol	Isolation Breakdown Voltage(R.M.S)	a.c.50HZ;r.m.s.;1min	3000	V
$T_{vj}$	Operating Junction Temperature		-40 to +125	$^\circ\text{C}$
$T_{stg}$	Storage Temperature		-40 to +125	$^\circ\text{C}$
$M_t$	Mounting Torque	To terminals(M5)	$3 \pm 15\%$	Nm
$M_s$		To heatsink(M6)	$5 \pm 15\%$	Nm
$di/dt$	Critical Rate of Rise of On-State Current	$T_{VJ} = T_{VJM}$ , $2/3V_{DRM}$ , $I_G = 500\text{mA}$ $Tr < 0.5\mu\text{s}$ , $tp > 6\mu\text{s}$	150	A/ $\mu\text{s}$
$dv/dt$	Critical Rate of Rise of Off-State Voltage, min.	$T_J = T_{VJM}$ , $2/3V_{DRM}$ linear voltage rise	1000	V/ $\mu\text{s}$
a	Maximum allowable acceleration		50	$\text{m/s}^2$


### Thermal Characteristics

Symbol	Item	Conditions	Values	Units
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to Case	0.90	$^\circ\text{C/W}$
$R_{th(c-s)}$	Thermal Impedance, max.	Case to Heatsink	0.20	$^\circ\text{C/W}$


### Electrical Characteristics

Symbol	Item	Conditions	Values			Units
$V_{TM}$	Peak On-State Voltage, max.	$T=25^\circ\text{C}$ $I_T = 75\text{A}$			1.80	V
$I_{RRM}/I_{DRM}$	Repetitive Peak Reverse Current, max. / Repetitive Peak Off-State Current, max.	$T_{VJ}=T_{VJM}$ , $V_R=V_{RRM}$ , $V_D=V_{DRM}$			10	mA
$V_{TO}$	On state threshold voltage	For power-loss calculations only ( $T_{VJ} = 125^\circ\text{C}$ )			0.9	V
$r_T$	Value of on-state slope resistance. max	$T_{VJ} = T_{VJM}$			12	$\text{m}\Omega$
$V_{GT}$	Gate Trigger Voltage, max.	$T_{VJ} = 25^\circ\text{C}$ , $V_D = 6\text{V}$			2.5	V
$I_{GT}$	Gate Trigger Current, max.	$T_{VJ} = 25^\circ\text{C}$ , $V_D = 6\text{V}$			150	mA
$V_{GD}$	Non-triggering gate voltage, max.	$T_{VJ}=125^\circ\text{C}$ , $V_D = 2/3V_{DRM}$			0.25	V
$I_{GD}$	Non-triggering gate current, max.	$T_{VJ} = 125^\circ\text{C}$ , $V_D = 2/3V_{DRM}$			5	mA
$I_L$	Latching current, max.	$T_{VJ} = 25^\circ\text{C}$ , $R_G = 33 \Omega$	250	400		mA
$I_H$	Holding current, max.	$T_{VJ} = 25^\circ\text{C}$ , $V_D = 6\text{V}$	100	200		mA
tgd	Gate controlled delay time	$T_{VJ}=25^\circ\text{C}$ , $I_G=1\text{A}$ , $di_G/dt=1\text{A}/\mu\text{s}$	1			$\mu\text{s}$
tq	Circuit commutated turn-off time	$T_{VJ} = T_{VJM}$	80			$\mu\text{s}$


**Performance Curves**

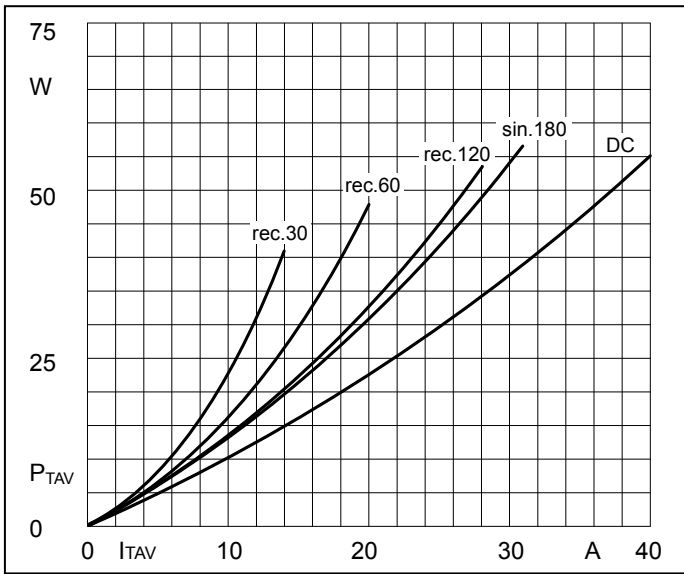


**Fig1. Power dissipation**

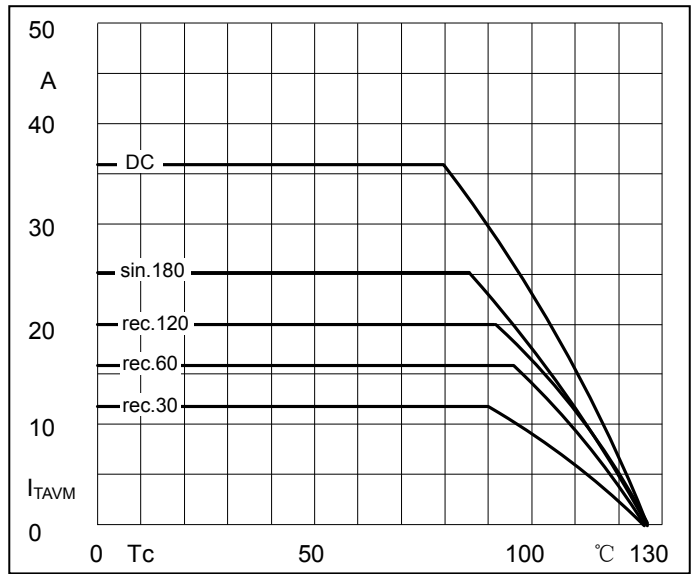

**Fig2. Forward Current Derating Curve**

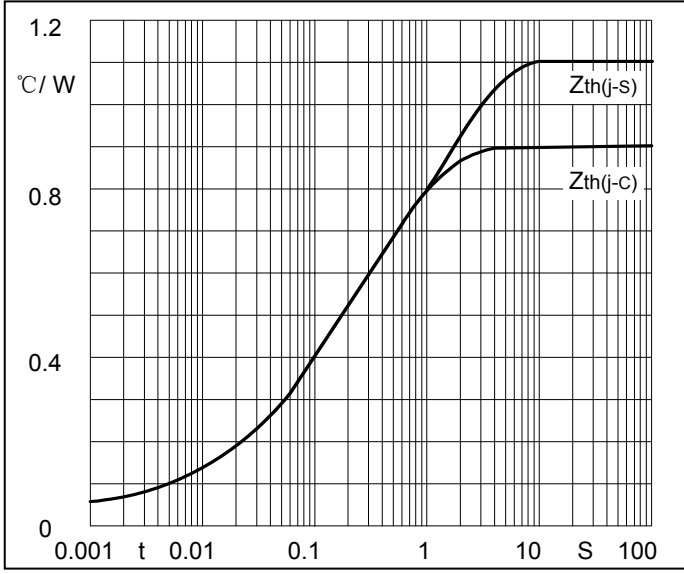


**Fig3. Transient thermal impedance**

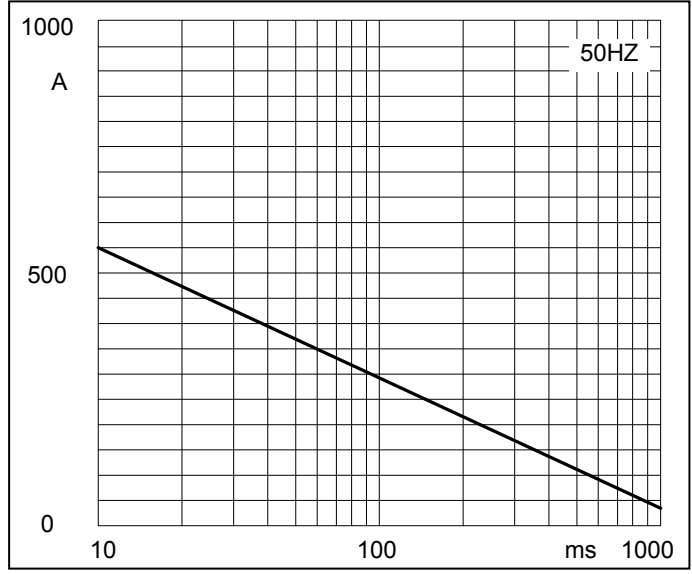


**Fig4. Max Non-Repetitive Forward Surge Current**

**Performance Curves**

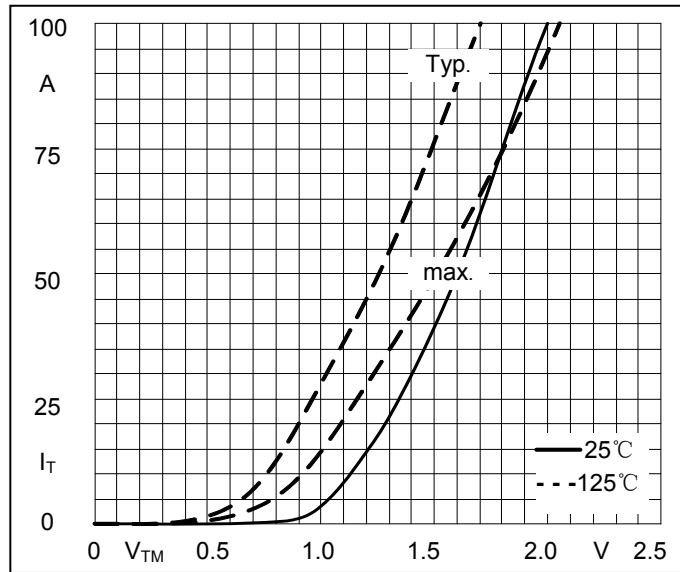

**Fig5. Forward Characteristics**

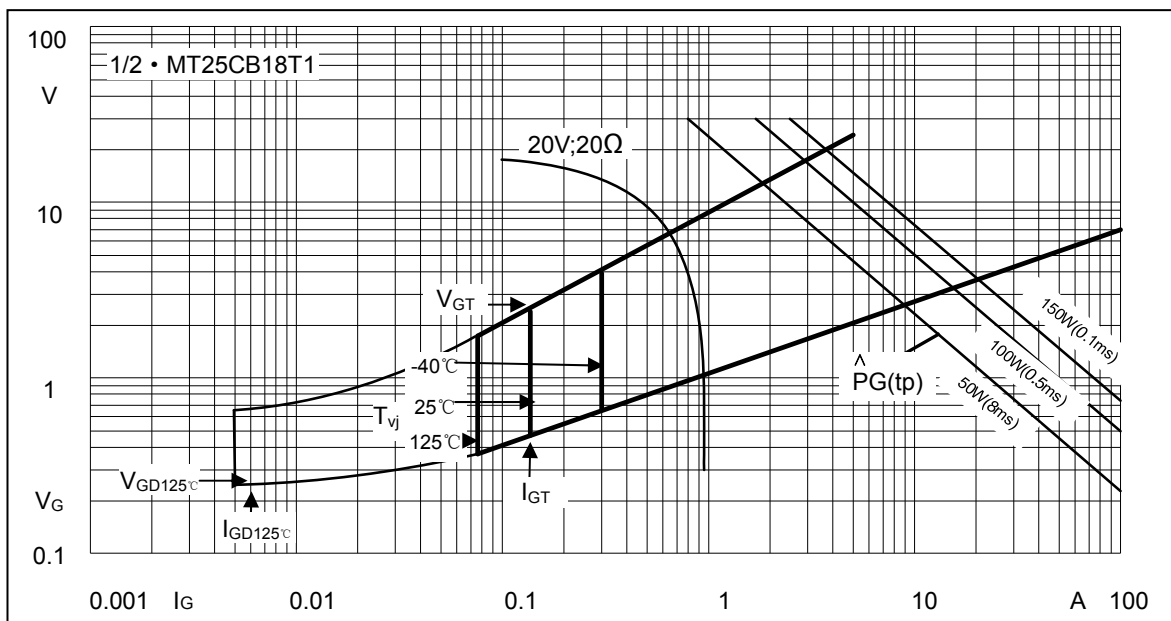

**Fig6. Gate trigger Characteristics**



**Ordering Information :**

Device	Packing
Part Number-BP	Bulk: 10PCS/BOX ;100PCS/CTN

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.