

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

PART
NAME

NON-METALLIC ENCLOSURE (STYLE A)

PART
No.

NBA-10152 & NBA-10172

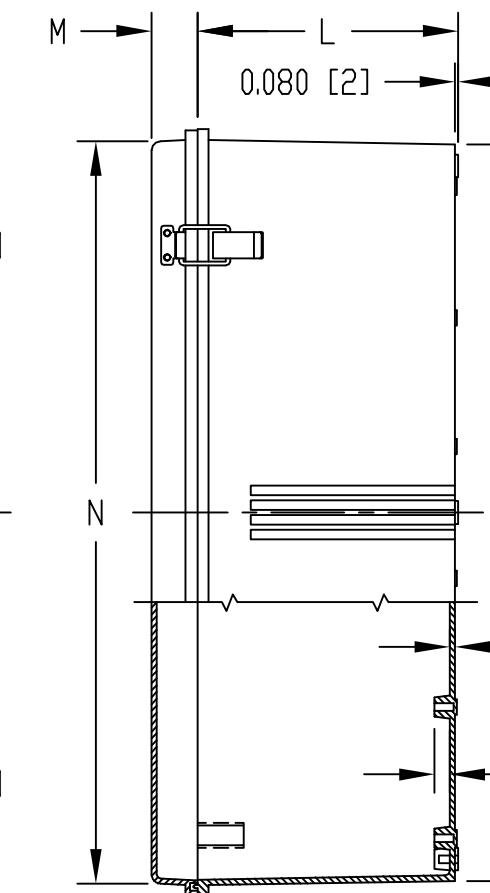
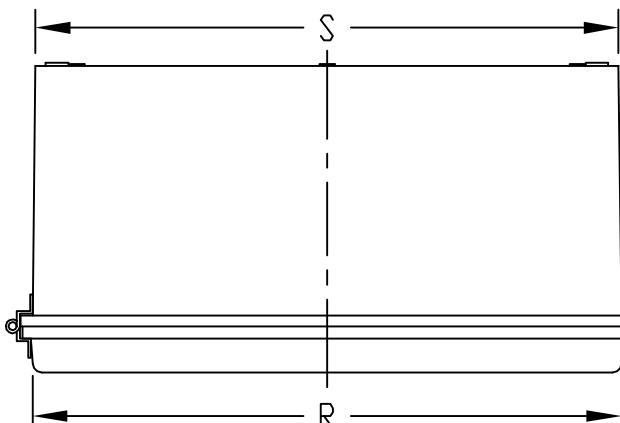
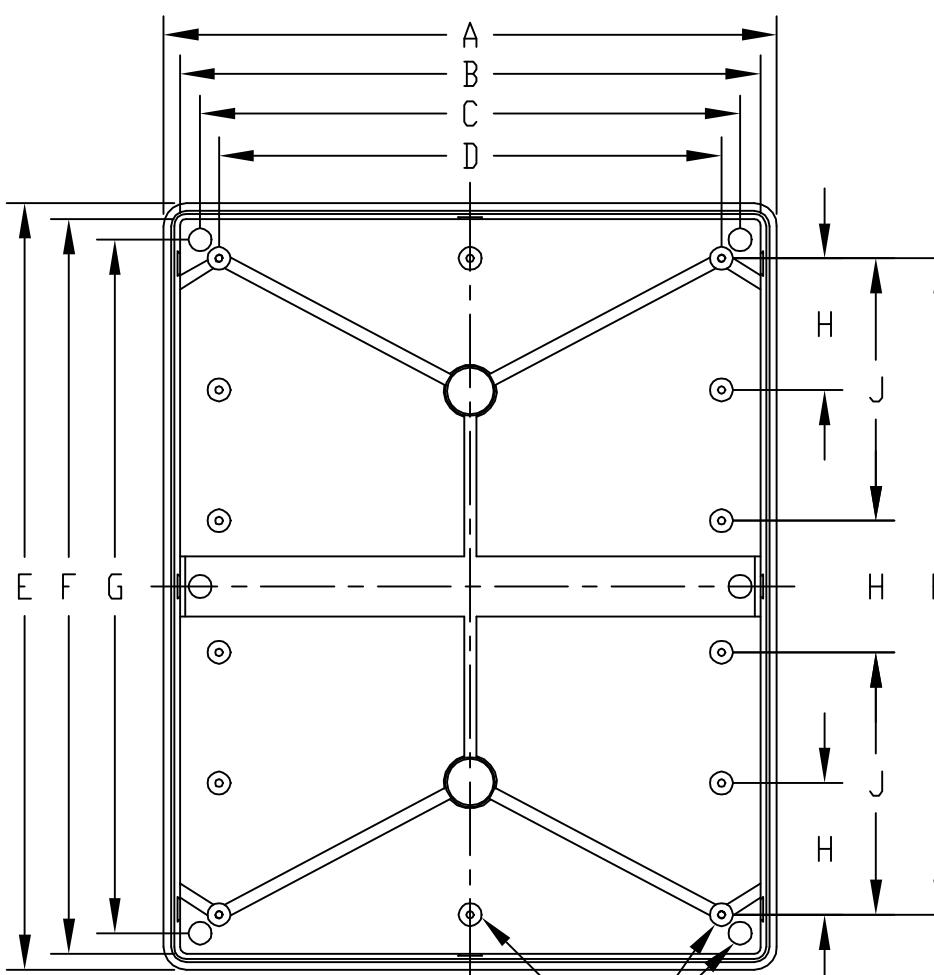
MATERIAL:

SOLID BODY & COVER — ABS/PC BLENDED PLASTIC
UL94-5VB FLAMMABILITY RATINGCLEAR COVER — POLYCARBONATE PLASTIC
UL94V-0 FLAMMABILITY RATING
UV STABILIZEDLATCHES, HINGES &
WALL MOUNTING BRACKETS — STAINLESS STEEL

FINISH:

BODY — LIGHT GRAY
COVER — LIGHT GRAY OR CLEARCOVER INCLUDES GRAY POLY-
URETHANE GASKET.NOTE: UNIT COMES COMPLETE WITH
(4) WALL MOUNTING BRKTS.
& (4) M5 x 10mm LG. TRUSS
HD. MACHINE SCREWS (NOT SHOWN)INTERNAL HINGED PANEL MOUNTING
BRACKETS, AIR & MOISTURE VENTS,
STAINLESS STEEL LOCKING HASP
AND GALVANIZED STEEL INTERNAL
PANEL ARE NOT INCLUDED, BUT
CAN BE PURCHASED SEPARATELY.

INDUSTRY STANDARDS:

UL508 TYPE 1, 2, 4, 4X INDOOR, 12 & 13
NEMA TYPE 1, 2, 4, 4X, 12 & 13
IEC529-IP65

0.590 [15] DIA. BOSS WITH 0.197 [5] DIA.
HOLE x 0.425 [11] DEEP (10) PLACES
BOSSES ACCEPT M6 METRIC OR 0.250" STD.
SHEET METAL SCREWS x 0.375 [9] LG.
(NOT SUPPLIED) VIEW LESS COVER

0.590 [15] DIA. BOSS WITH
M5 x 0.8mm THREADED BRASS INSERT
(4) PL'S INSIDE AS SHOWN - AND -
(6) PL'S OUTSIDE (REFERENCE
LOCATION DIMENSIONS "C" AND "G")

DIMENSIONS = INCHES
[MILLIMETERS]

NOTE: ALL DIMENSIONS HAVE ± 0.039 [± 1] TOLERANCE
UNLESS OTHERWISE SPECIFIED

PART NO.		DIMENSIONS															
GRAY COVER	CLEAR COVER	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
NBA-10152	NBA-10172	15.742 [400]	14.905 [379]	13.859 [352]	12.900 [328]	19.682 [500]	18.852 [479]	17.796 [452]	3.375 [86]	6.734 [171]	16.843 [428]	6.688 [170]	1.185 [30]	19.065 [484]	18.905 [480]	15.120 [384]	14.965 [380]