



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Photologic® Slotted Optical Switch “Wide Gap” Series



OPB900 through OPB913 Series (L, W_Z)

Features:

- 0.375" (9.5 mm) wide gap
- Choice of logical output configurations
- Choice of opaque or IR transmissive housing material
- Choice of PCBoard or 26 AWG, UL rated wire
- Data rates to 250 kBaud



Description:

The **OPB900 - OPB913** series of Photologic® Integrated Circuit Switches provide optimum flexibility for the design engineer. Building from a standard housing with a 0.375" (9.5mm) wide slot, a user can specify the type and polarity of the TTL output and the type of shell material.

Electrical output can be specified as either TTL Totem Pole (buffered) or TTL Open Collector, either of which can be supplied with an inverted output polarity.


All versions have the added stability of hysteresis built into the amplification circuitry.

Applications:


- Mechanical switch replacement
- Speed indication (tachometer)
- Mechanical limit indication
- Edge sensing
- Object sensing

Part Number Guide — OPB900 Series (L, W)	
OPB9	---
0 = Dust protection with apertures 1 = Open apertured	L55 = Solder lead termination (PCBoard mount) or W5_Z = 26 AWG wire termination (24" [61cm] long)
0 = Totem Pole 1 = Open Collector 2 = Inverted Totem Pole 3 = Inverted Open Collector	Aperture sizes: 1 = 0.010" (0.25 mm) 5 = 0.050" (1.27 mm)


Totem-Pole-Output

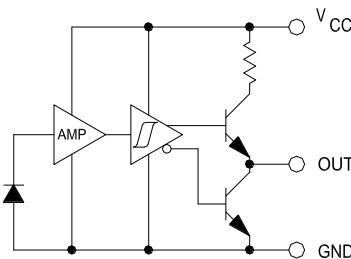


Open-Collector-Output

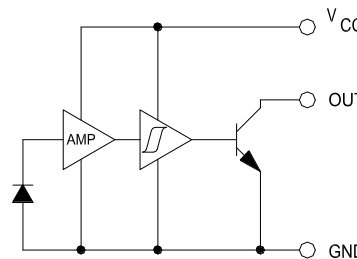

Inverted Totem-Pole

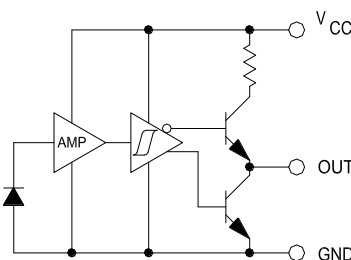

Inverted Open Collector

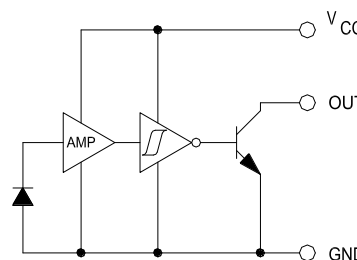

RoHS

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | OPTEK Technology
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch “Wide Gap” Series



OPB900 through OPB913 Series (L, W_Z)

Electrical Specifications

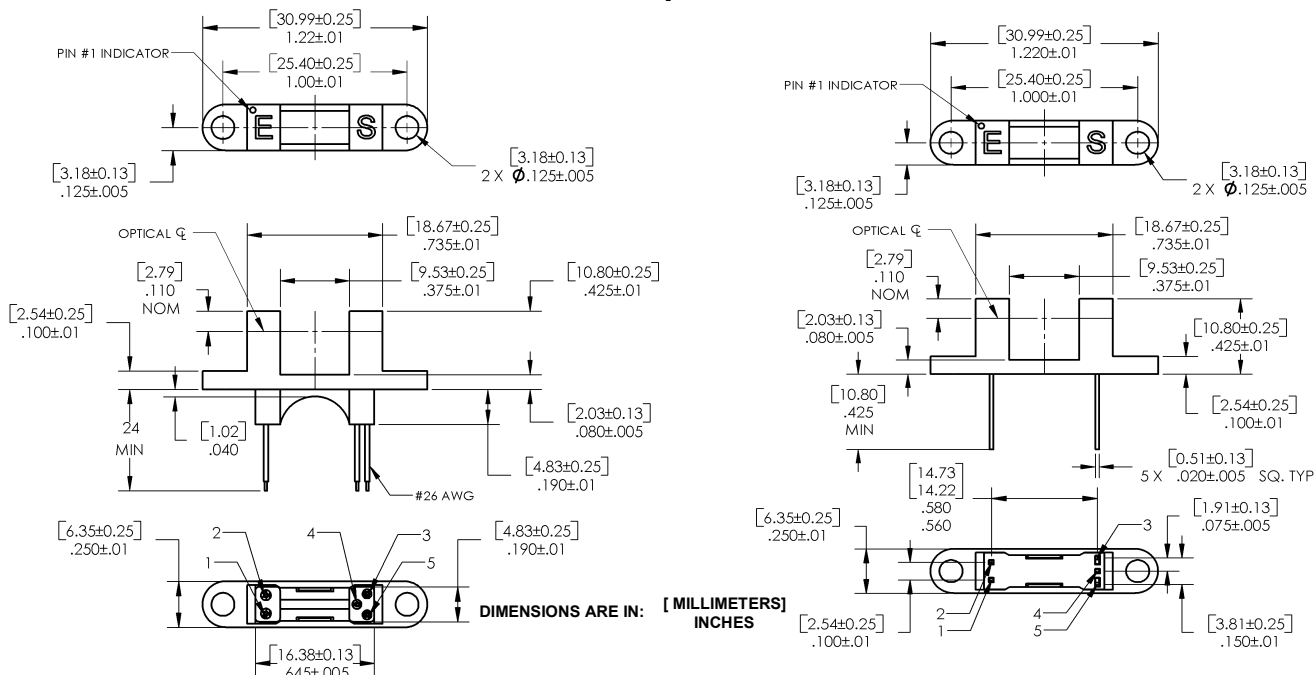

Color-Pin #	Description	Color-Pin #	Description	Color-Pin #	Description	Color-Pin #	Description	Color-Pin #	Description
Red-1	Anode	Black-2	Cathode	White-3	V _{CC}	Blue-4	Output	Green-5	Ground

Absolute Maximum Ratings (T_A = -40°C to +70° Unless otherwise noted)

Storage Temperature	-40° C to +85° C
Operating Temperature	-40° C to +70° C
Lead Soldering Temperature (1/16" (1.6 mm) from case for 5 seconds with soldering iron) ⁽¹⁾	260° C

Input Infrared LED

DC Forward Diode (LED) Current	40 mA
DC Reverse Diode (LED) Voltage	2 V
Input Diode Power Dissipation ⁽¹⁾	100 mW

Output Photologic®

Supply Voltage, V _{CC} (not to exceed 3 seconds)	10V
Voltage at Output Lead (Open Collector Output version)	35 V
Output Photologic® Power Dissipation ⁽²⁾	200 mW
Total Device Power Dissipation ⁽³⁾	300 mW

Notes:

- (1) Derate linearly 2.22 mW/°C above 25°C
- (2) Derate linearly 4.44 mW/°C above 25°C
- (3) Derate linearly 6.66 mW/°C above 25°C
- (4) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (5) Methanol or isopropanol are recommended as cleaning agents. The plastic housing is soluble in chlorinated hydrocarbons and ketones.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Photologic[®] Slotted Optical Switch “Wide Gap” Series



OPB900 through OPB913 Series (L, W_Z)

Electrical Characteristics (T_A = -40°C to + 70° Unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input Diode (See OPB240 for more information — for reference only)

V _F	Forward Voltage	-	-	1.7	V	I _F = 20 mA, T _A = 25° C
I _R	Reverse Current	-	-	100	µA	V _R = 2 V, T _A = 25° C

Output Photologic[®] Sensor (See OPB560 for more information — for reference only)

V _{CC}	Operating D.C. Supply Voltage	4.75	-	5.25	V	
I _{CCL}	Low Level Supply Current: Buffered Totem-Pole Output Buffered Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 0 mA ⁽¹⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 20 mA ⁽¹⁾
I _{CCH}	High Level Supply Current: Buffered Totem-Pole Output Buffered Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 20 mA ⁽¹⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output	-	-	15	mA	V _{CC} = 5.25 V, I _F = 0 mA ⁽¹⁾
V _{OL}	Low Level Supply Current: Buffered Totem-Pole Output Buffered Open-Collector Output	-	-	0.4	V	V _{CC} = 4.75 V, I _{OL} = 12.8 mA, I _F = 0 mA ⁽¹⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output	-	-	0.4	V	V _{CC} = 4.75 V, I _{OL} = 12.8 mA, I _F = 20 mA ⁽¹⁾
V _{OH}	High Level Output Voltage: Buffered Totem-Pole Output	2.4	-	-	V	V _{CC} = 4.75 V, I _{OH} = -800 µA, I _F = 20 mA ⁽¹⁾
	Inverted Totem-Pole Output	2.4	-	-	V	V _{CC} = 4.75 V, I _{OH} = -800 µA, I _F = 0 mA ⁽¹⁾
I _{OH}	High Level Output Current: Buffered Open-Collector Output	-	-	100	µA	V _{CC} = 4.75 V, V _{OH} = 30 V, T _A = 25° C
	Inverted Open-Collector Output	-	-	100	µA	V _{CC} = 4.75 V, V _{OH} = 30 V, T _A = 25° C
I _F (+)	LED Positive-Going Threshold Current	-	-	20	mA	V _{CC} = 5 V, T _A = 25° C
I _F (+)/I _F (-)	Hysteresis	-	2	-	-	V _{CC} = 5 V
I _{OS}	Short Circuit Output Current: Buffered Totem-Pole Output	-30	-	-100	mA	V _{CC} = 5.25 V, I _F = 20 mA Output = GND
	Inverted Totem-Pole Output	-30	-	-100	mA	V _{CC} = 5.25 V, I _F = 0 mA Output = GND
t _r , t _f	Output Rise Time, Output Fall Time	-	70	-	ns	V _{CC} = 5 V, T _A = 25° C I _F = 0 or 20 mA
t _{PLH} , t _{PHL}	Propagation Delay Low-High and High-Low	-	5	-	µs	R _L = 8 TTL Loads (Totem-Pole) R _L = 360 Ω (Open-Collector)

Notes:

(1) Normal application would be with light source blocked, simulated by I_F = 0 mA.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | OPTEK Technology
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Photologic[®] Slotted Optical Switch “Wide Gap” Series


OPB900 through OPB913 Series (L, W_Z)





OPB900 - Flag Next to Emitter

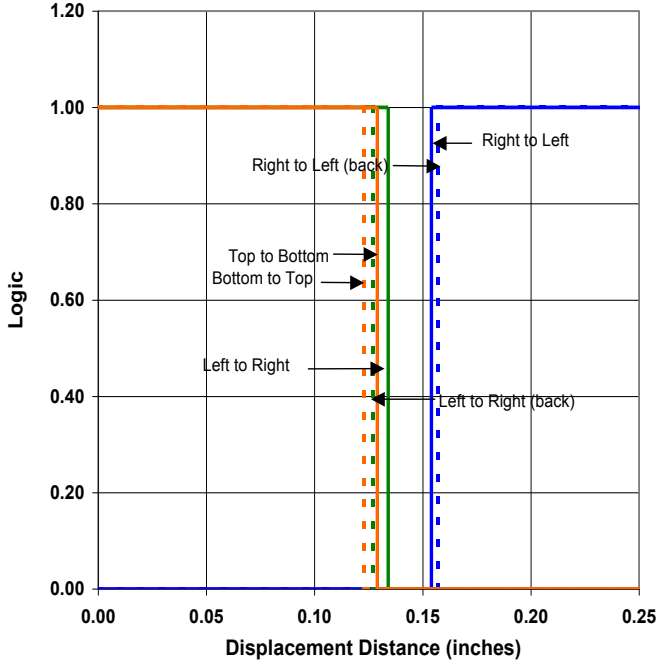

OPB900 - Flag Next to Sensor

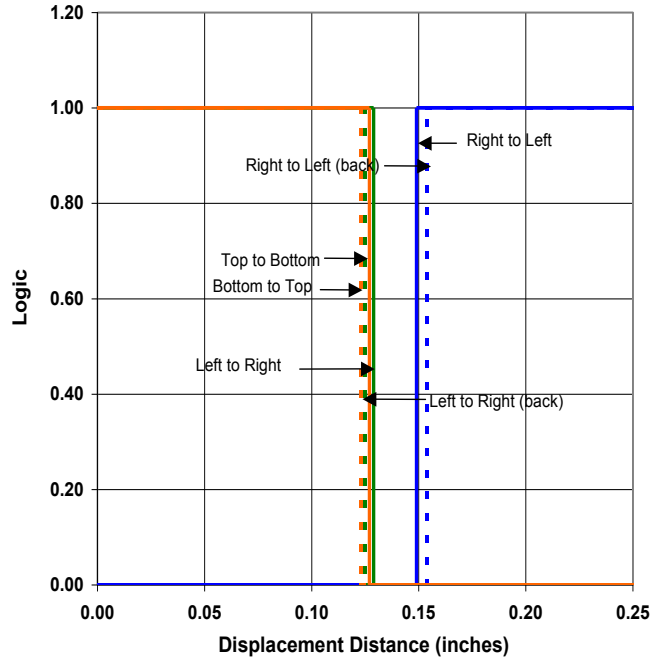

OPB900 - Flag in Middle of Slot

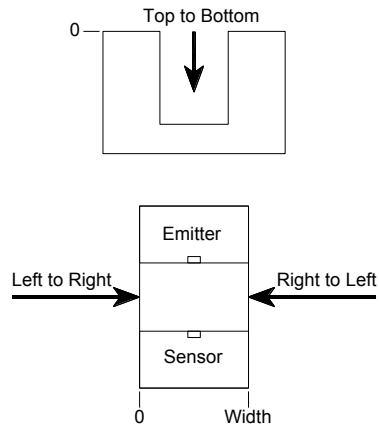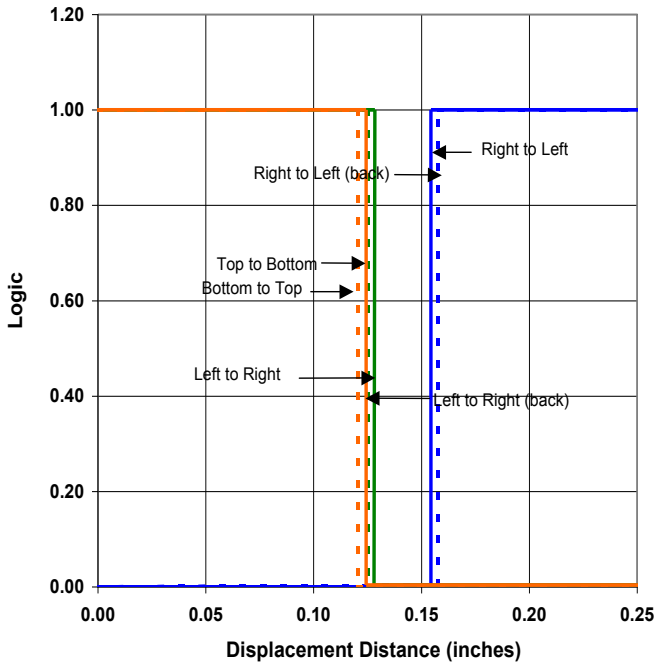

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com