



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!







Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|------------------------------------------------|------|-------------|---|---|----------|---|
| SIGN | DATE | DESCRIPTION | | | APPROVER | |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! | | | | | | |

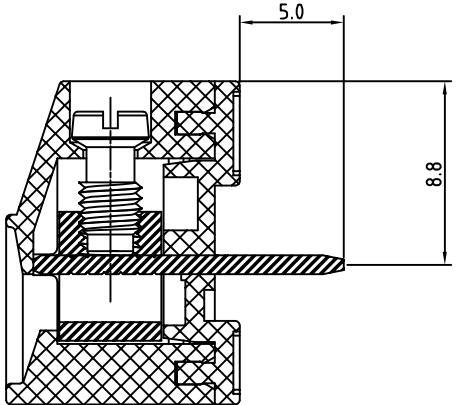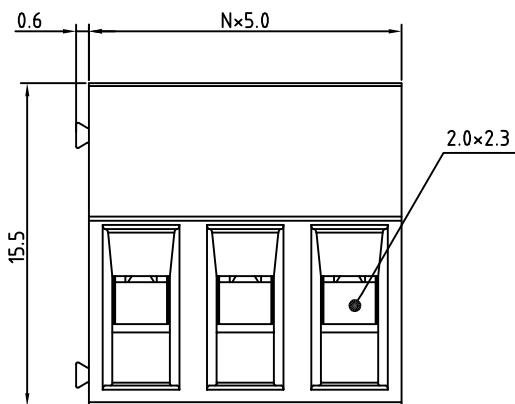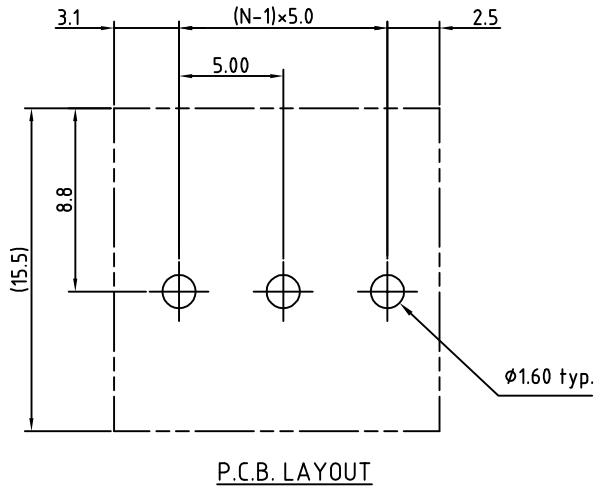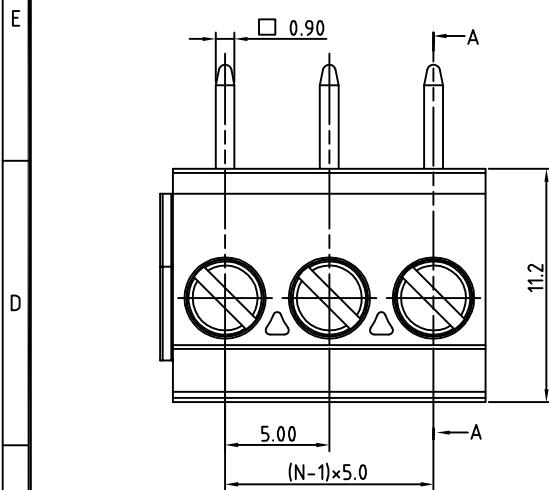

N=Number of contacts

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF ON-SHORE
TECHNOLOGY, INC. AND SHALL NOT BE
REPRODUCED, COPIED OR USED IN ANY
MANNER WITHOUT THE PRIOR WRITTEN
CONSENT OF ON-SHORE TECHNOLOGY,
INC.

Material

- Insulating body Thermoplastic (UL94V-0)
- Insulating cover Thermoplastic (UL94V-0)
- Terminal screw Steel Zinc plating “-” slot type
- Terminal body Brass, Ni plated
- Contact Brass, Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 14-30
 - Stranded wire(AWG): 14-30
- Torque(Lb-In): 4.3
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus

RoHS Compliant

PART NUMBER:

OSTESXX0150

No. of Poles
02: 2 Poles
03: 3 Poles
...
24: 24 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey



| TITLE | | OSTES 5.0 Series | | | DWG NO. | OSTESXX0150.DWG | Tolerance |
|----------|-------------|------------------|------------|------------|---------|-----------------|-------------|
| PART NO. | OSTESXX0150 | CHECKED | DESIGNED | DRAWN | | | |
| APPROVED | | | Aaron | Aaron | | | |
| | | | 2006.12.23 | 2006.12.23 | | | |
| | | | | | Ø1.60 | UNIT: mm | X. ±0.50 |
| | | | | | | SCALE: NONE | X.X. ±0.30 |
| | | | | | | | X.XX. ±0.10 |
| | | | | | | SHEET: 01/01 | X° ±1° |
| | | | | | | REV.: B | |