



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SMT Power Inductor

High Current Molded Power Inductor - PA4341.XXXANLT Series



- Height:** 3.0mm Max
- Footprint:** 7.4mm x 6.8mm Max
- Current Rating:** up to 30.0A
- Inductance Range:** 0.15uH to 22.0uH
- Shielded construction and compact design
- High current, low DCR, and high efficiency
- Minimized acoustic noise and minimized leakage flux

Electrical Specifications @ 25°C - Operating Temperature -55°C to +155°C

Part Number	Inductance 100KHz, 1V uH±20%	Rated Current A	DC Resistance		Saturation Current Max. A
			MAX.	TYP.	
			mΩ	mΩ	
PA4341.151ANLT	0.15*	30.0	2.1	1.7	40.0
PA4341.221ANLT	0.22	23.0	2.5	2.0	34.0
PA4341.331ANLT	0.33	21.0	3.4	2.8	25.0
PA4341.361ANLT	0.36	20.0	3.9	3.3	24.0
PA4341.471ANLT	0.47	18.0	4.0	3.4	20.0
PA4341.561ANLT	0.56	16.5	4.5	3.9	18.0
PA4341.681ANLT	0.68	16.0	5.3	4.7	17.0
PA4341.821ANLT	0.82	14.0	6.0	5.4	16.0
PA4341.102ANLT	1.00	12.0	7.4	6.7	15.0
PA4341.122ANLT	1.20	10.0	9.5	7.7	14.0
PA4341.152ANLT	1.50	10.0	12.1	10.2	14.0
PA4341.222ANLT	2.20	8.0	15.0	13.5	10.0
PA4341.272ANLT	2.70	7.2	20.0	17.3	9.8
PA4341.332ANLT	3.30	6.5	22.0	19.0	9.5
PA4341.472ANLT	4.70	5.5	33.0	28.0	6.5
PA4341.562ANLT	5.60	5.5	42.0	39.0	6.0
PA4341.682ANLT	6.80	4.5	50.0	43.0	6.0
PA4341.822ANLT	8.20	4.5	60.0	54.0	6.0
PA4341.103ANLT	10.0	4.0	68.0	62.0	5.5
PA4341.153ANLT	15.0	3.0	140	110	4.5
PA4341.223ANLT	22.0	2.5	190	150	3.0

SMT Power Inductor

High Current Molded Power Inductor - PA4341.XXXANLT Series




Notes:

1. Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
2. The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
3. Please note that the inductance tolerance is $\pm 20\%$ for all parts except PA4341.151NLT ($\pm 30\%$)
4. The rated current is the DC current required to raise the component temperature by approximately 40°C . Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
5. The part temperature (ambient+temp rise) should not exceed 155°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

Mechanical

PA4341.XXXANLT

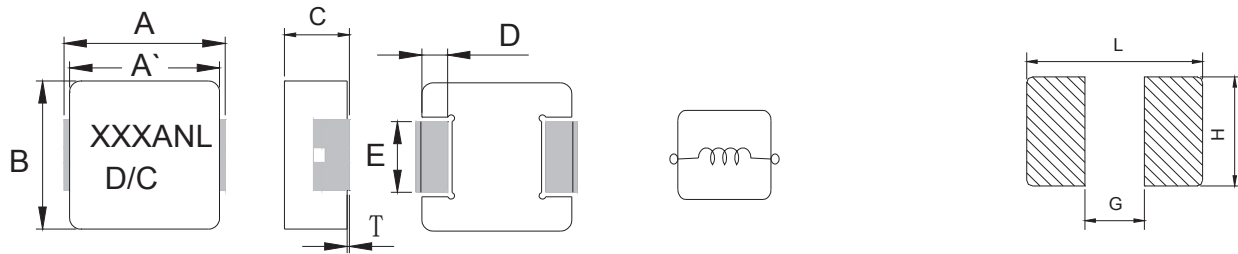


Final Layout

SUGGESTED PAD LAYOUT

Series	A	A'	B	C	D	E	T	L	G	H
PA4341.XXXANLT	7.1 ± 0.3	6.4 ± 0.3	6.6 ± 0.2	2.8 ± 0.2	1.6 ± 0.3	3.0 ± 0.2	0-0.15	8.0	3.7	3.4

All Dimensions in mm.

TAPE & REEL INFO

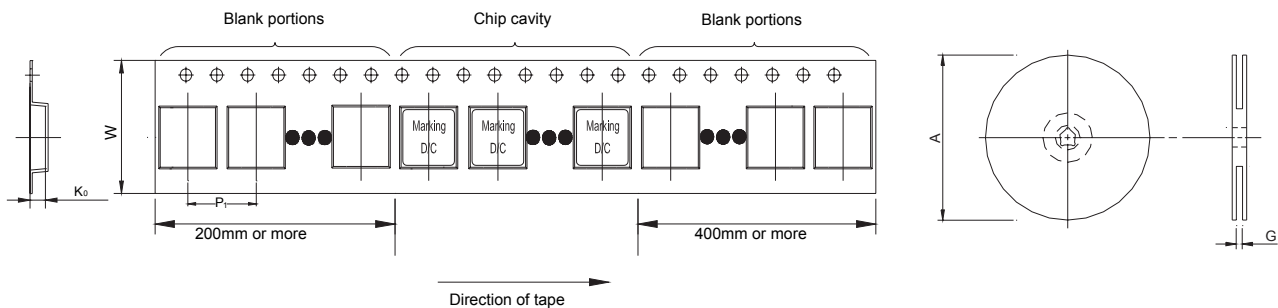







SURFACE MOUNTING TYPE, REEL/TAPE LIST						
	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	PCS/REEL
PA4341.XXXANLT	$\varnothing 330$	$16.4 +2/-0$	12.0 ± 0.1	16 ± 0.3	3.3 ± 0.1	1000

SMT Power Inductor

High Current Molded Power Inductor - PA4341.XXXANLT Series









Typical Performance Curves

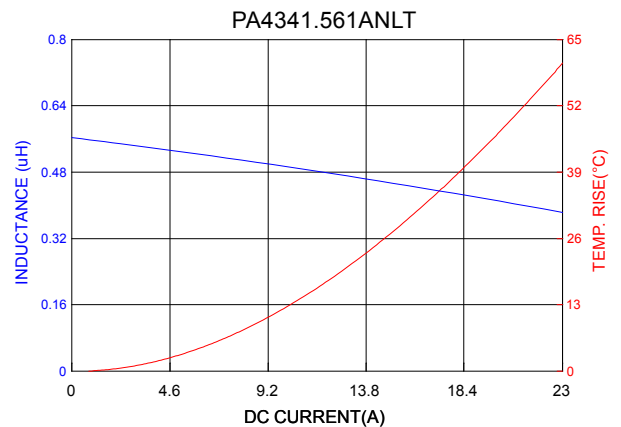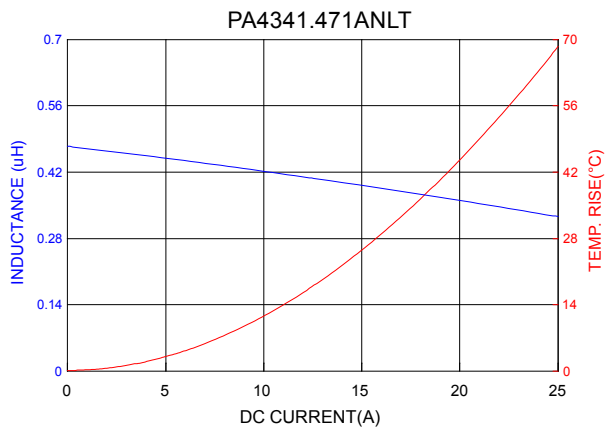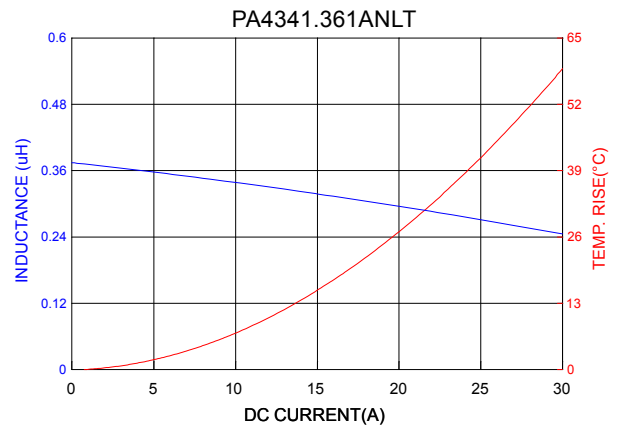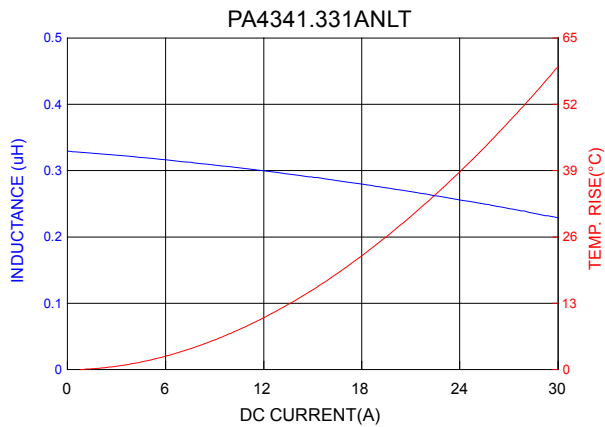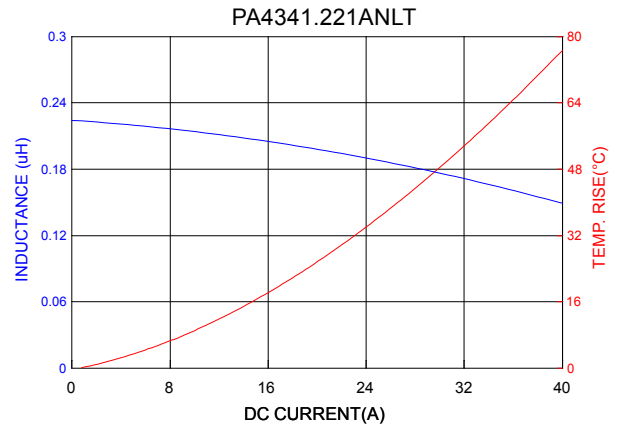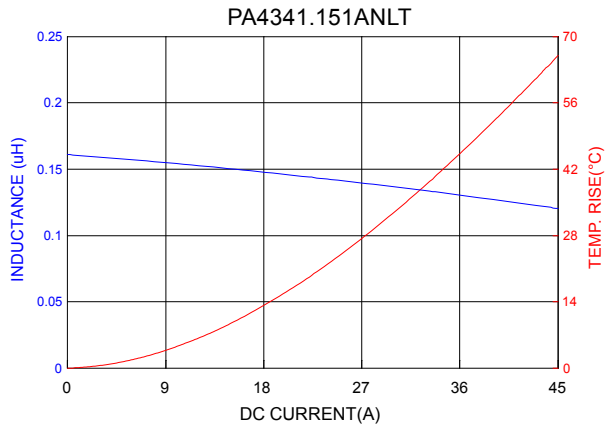







SMT Power Inductor

High Current Molded Power Inductor - PA4341.XXXANLT Series

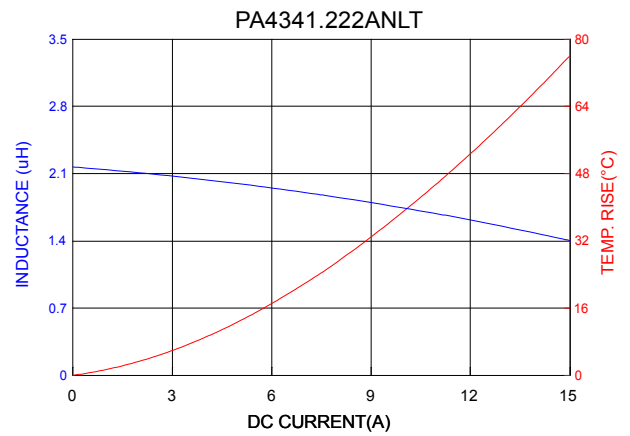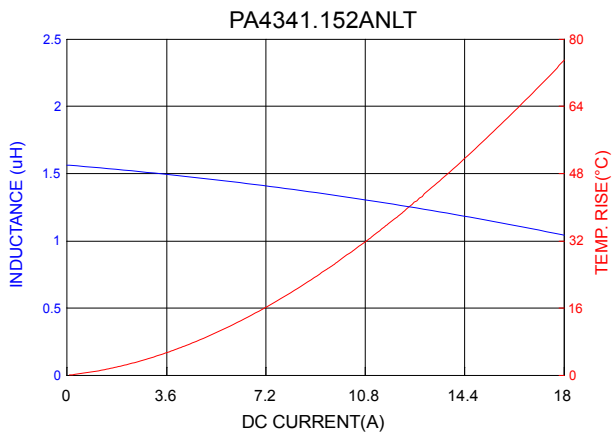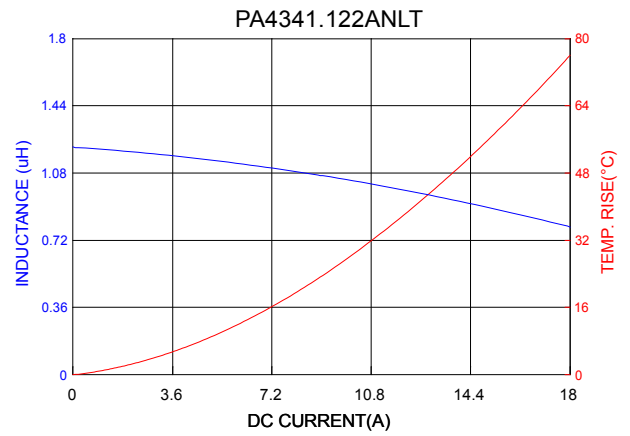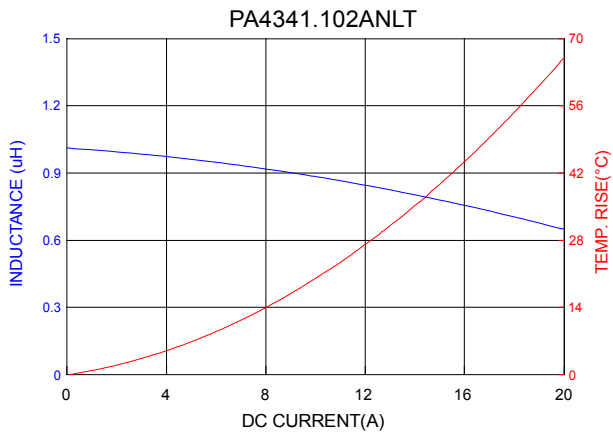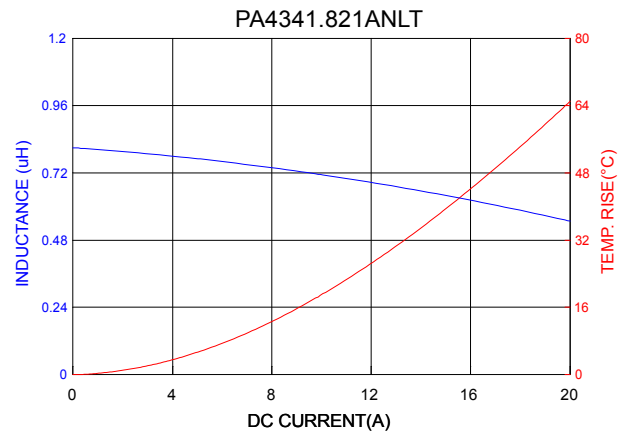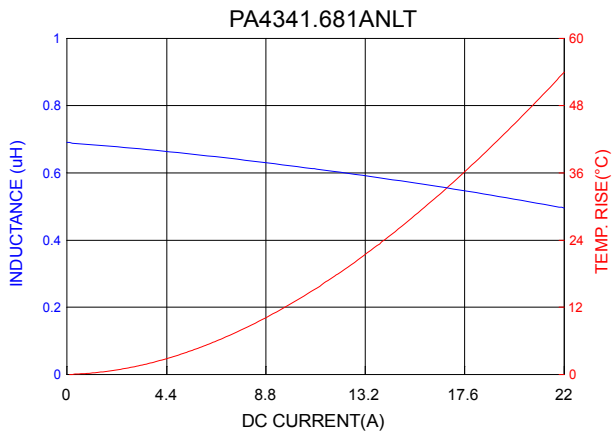




SMT Power Inductor

High Current Molded Power Inductor - PA4341.XXXANLT Series

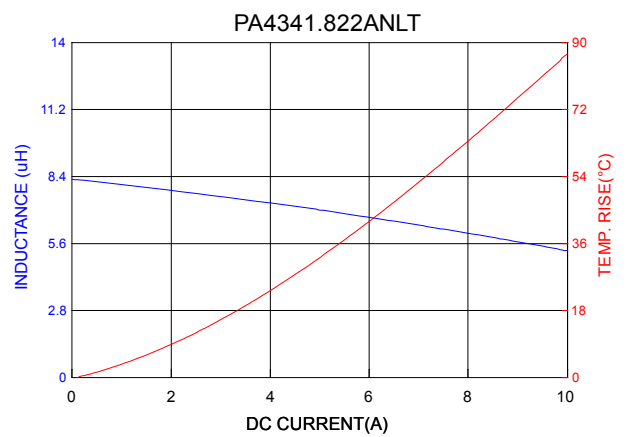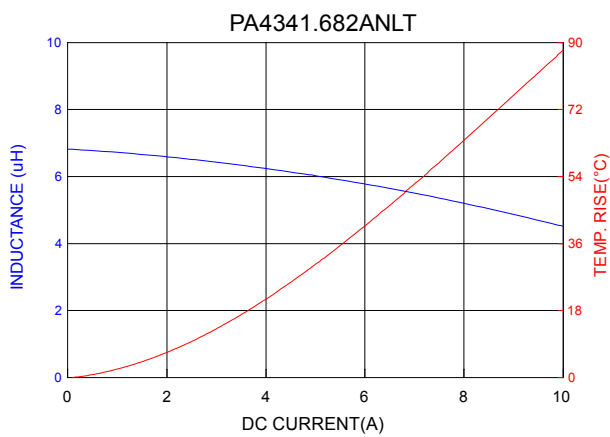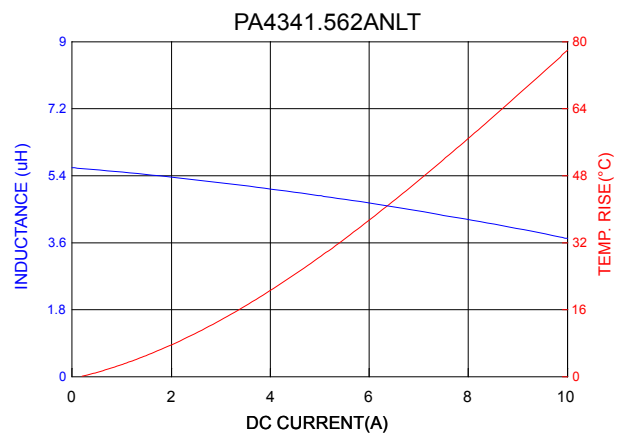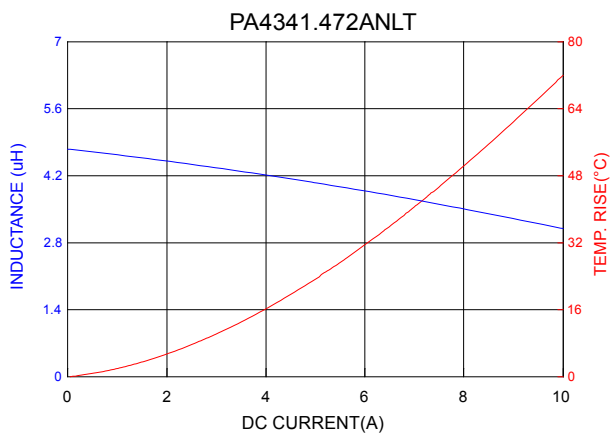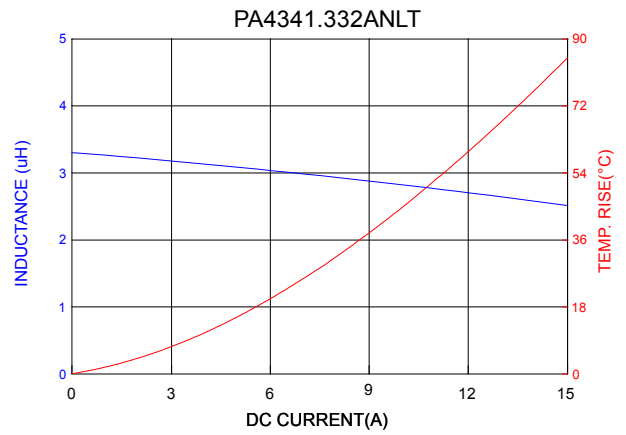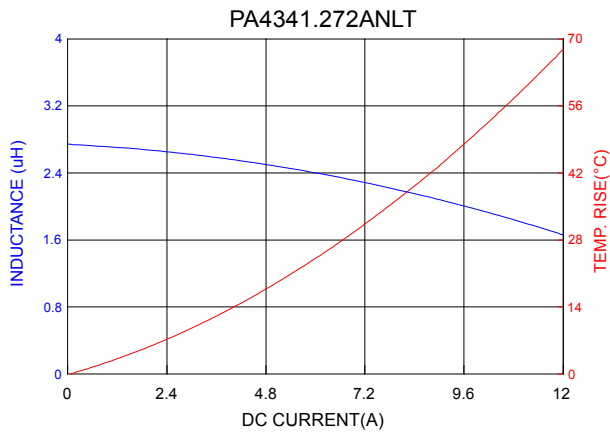

SMT Power Inductor

High Current Molded Power Inductor - PA4341.XXXANLT Series

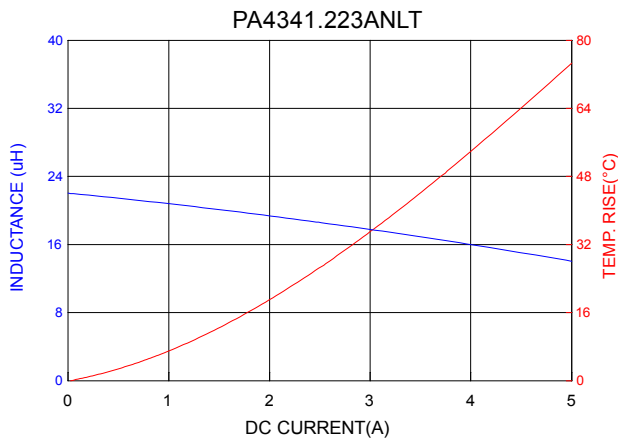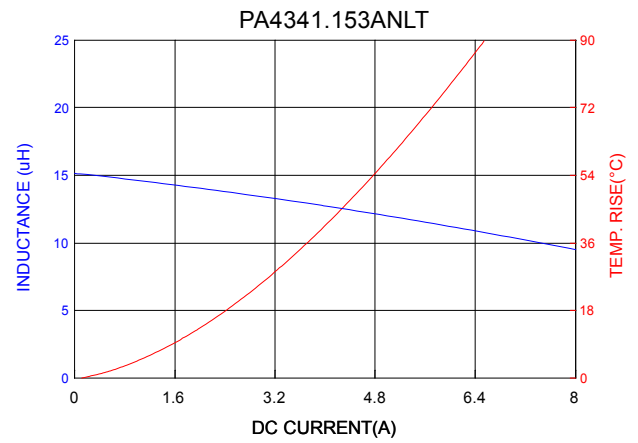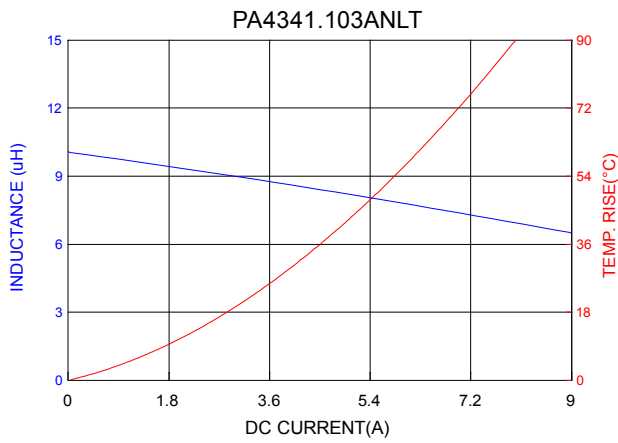

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen, P.R.
China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

3 Fraser Street
0428 DUO Tower
Singapore 189352

Pulse North Asia

1F, No.111
Xiyuan Road
Zhongli District
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. Pulse Electronics, Inc. All rights reserved.