



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**SERIES:** PDRA-240 | **DESCRIPTION:** AC-DC POWER SUPPLY

**FEATURES**


- up to 240 W continuous power
- universal input voltage range
- over current, over voltage, input under voltage, short circuit, and over temperature protections
- active power factor correction
- remote on/off control
- output trim
- low ripple and noise
- -25 to +70°C temperature range
- UL/cUL 60950-1 safety approval
- efficiency up to 92%



MODEL	output voltage	output current max	output power max	ripple and noise <sup>1</sup> max	efficiency <sup>2</sup> typ
	(Vdc)	(A)	(W)	(mVp-p)	(%)
PDRA-240-24	24	10	240	100	92

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with a 1 µF ceramic and 10 µF electrolytic capacitor on the output.  
 2. At 230 Vac input.  
 3. All specifications are measured at Ta=25°C, humidity <75%, nominal input voltage, and rated output load unless otherwise specified.

**PART NUMBER KEY**

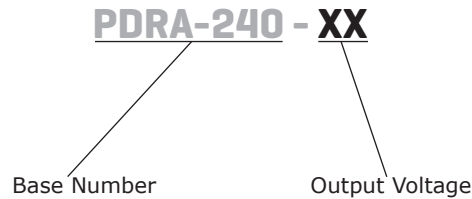

## INPUT

parameter	conditions/description	min	typ	max	units
voltage		85		264	Vac
		120		370	Vdc
frequency		47		63	Hz
under voltage protection	start-up voltage at full load	75		83	Vac
	shutdown voltage at full load	67		74	Vac
current	at 115 Vac			3.0	A
	at 230 Vac			1.5	A
inrush current	at 115 Vac		30		A
	at 230 Vac		60		A
power factor correction	at 115 Vac		0.98		
	at 230 Vac		0.96		
no load power consumption			1.0		W

## OUTPUT

parameter	conditions/description	min	typ	max	units
capacitive load				4,700	μF
initial set point accuracy				±1	%
line regulation	at full load			±0.5	%
load regulation	from 5~100% load			±1	%
adjustability <sup>1</sup>	via built in trim pot	24		28	Vdc
start-up time				1.5	s
hold-up time	at 115/230 Vac		22		ms
switching frequency			100		kHz
temperature coefficient			±0.03		%/°C

Notes: 1. Max output power of 240 W.

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	continuous, auto recovery				
over current protection	auto recovery	110		150	%
short circuit protection	continuous, auto recovery				
over temperature protection	output shutdown, auto recovery				

## SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute	3,000			Vac
	input to ground for 1 minute	1,500			Vac
	output to ground for 1 minute	500			Vac
safety approvals	UL 60950-1, EN 60950-1				
safety class	class I				
EMI/EMC	EN 55022, EN 55024, EN 61000-3-2, EN 61000-3-3				
conducted emissions	CISPR22/EN55022, Class B				
radiated emissions	CISPR22/EN55022, Class B				
ESD	IEC/EN61000-4-2, Class B, contact ±6 kV/ air ±8 kV				
radiated immunity	IEC/EN61000-4-3, Class A, 10 V/m				
EFT/burst	IEC/EN61000-4-4, Class B, ±4 kV				
surge	IEC/EN61000-4-5, Class B, line to line ±2 kV/ line to ground ±4 kV				
conducted immunity	IEC/EN61000-4-6, Class A, 10 Vr.m.s				

Notes: 2. The power supply is considered a component which will be installed into final equipment. The final equipment still must be tested to meet the necessary EMC directives.

## SAFETY & COMPLIANCE (CONTINUED)

parameter	conditions/description	min	typ	max	units
PFM	IEC/EN61000-4-8, Class A, 10 A/m				
voltage dips & interruptions	IEC/EN61000-4-11, Class B, 0%-70%				
MTBF	as per MIL-HDBK-217F at 25 °C	300,000			hours
RoHS	2011/65/EU				

Notes: 1. The power supply is considered a component which will be installed into final equipment. The final equipment still must be tested to meet the necessary EMC directives.

## ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-25		70	°C
storage temperature		-25		85	°C
storage humidity	non-condensing			95	%

## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	60.00 x 125.00 x 120.00 (2.36 x 4.92 x 4.72 inches)				mm
material	heat resistant plastic (UL94V-0) and metal				
weight			820		g


## MECHANICAL DRAWING

units: mm [inch]  
tolerance: ±1.00[±0.040]

wire range: 26~10 AWG  
strip length: 8.0 mm  
mounts to DIN RAIL TS35


TERMINAL CONNECTIONS	
TERMINAL	Function
1	+Vo
2	+Vo
3	-Vo
4	-Vo
5	AC(N)
6	AC(L)
7	⏏

CONTROL TERMINAL	
TERMINAL	Function
1	+CTRL
2	-CTRL

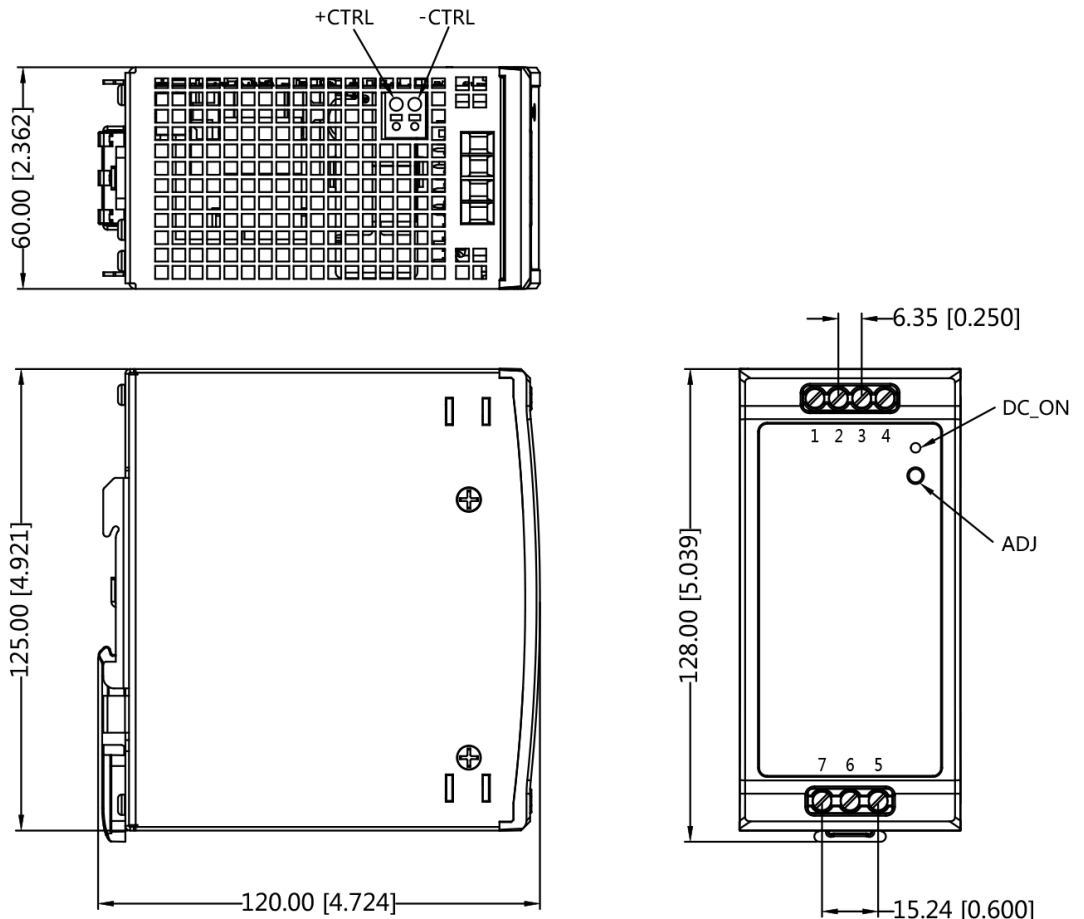


## DERATING CURVES

load vs. ambient temperature  
(at 85~264 Vac / 120~370 Vdc input voltage)

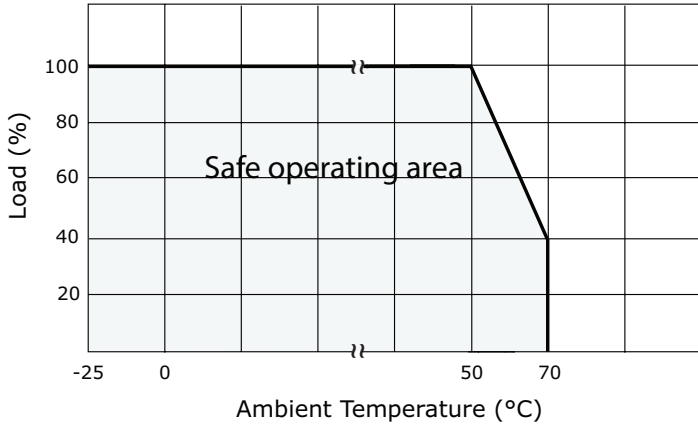


load vs. input voltage  
(at 25°C)

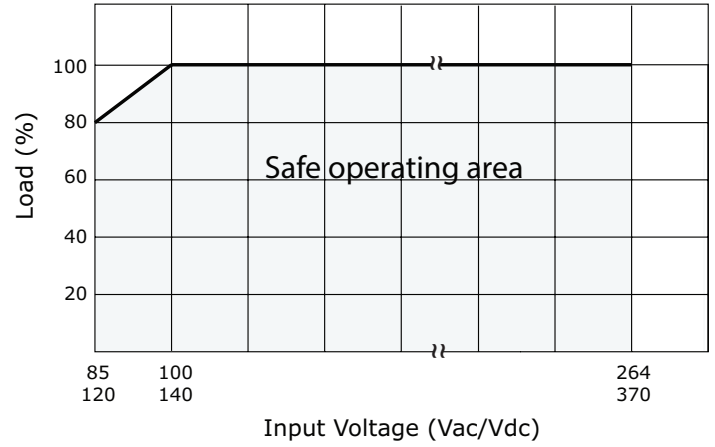


## EFFICIENCY CURVE

PDRA-240-24 Efficiency Curve  
(Efficiency vs. Load Current)

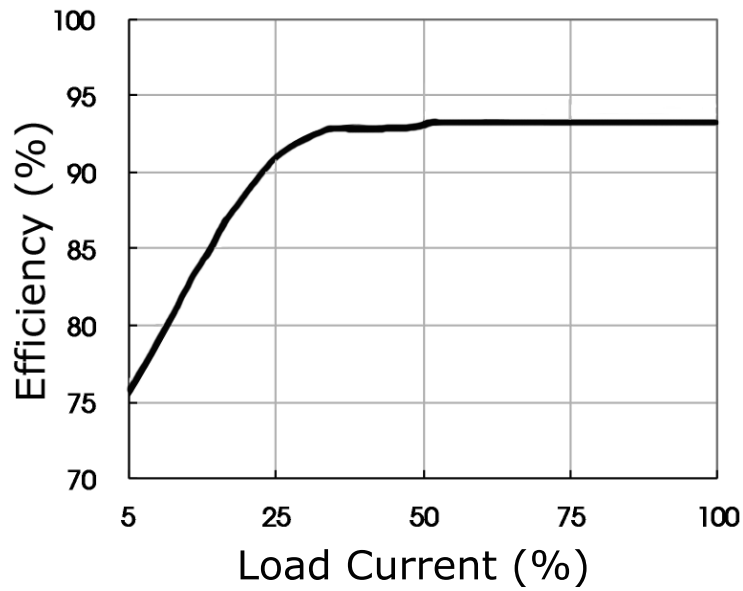


## APPLICATION CIRCUIT

**Figure 1 Typical Application Circuit**

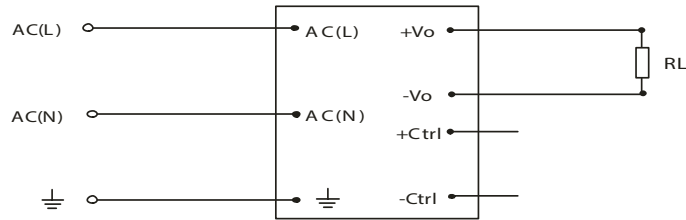

**Figure 2 Remote Control Applications Circuit**

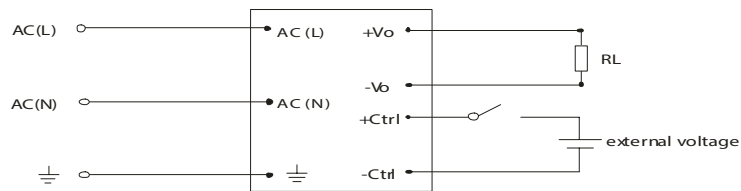

The power supply can be turned on/off by using the "CTRL" terminals.  
Enable output: open  
Disable output: 4.5~12.5 Vdc

## REVISION HISTORY

---

rev.	description	date
1.0	initial release	10/17/2016

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**<sup>®</sup>

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.