



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 5.7kW 3-Phase Monitored PDU, 120V Outlets (36 5-15/20R), L21-20P, 10ft Cord, 0U Vertical, TAA

MODEL NUMBER: PDU3VN10L2120LV

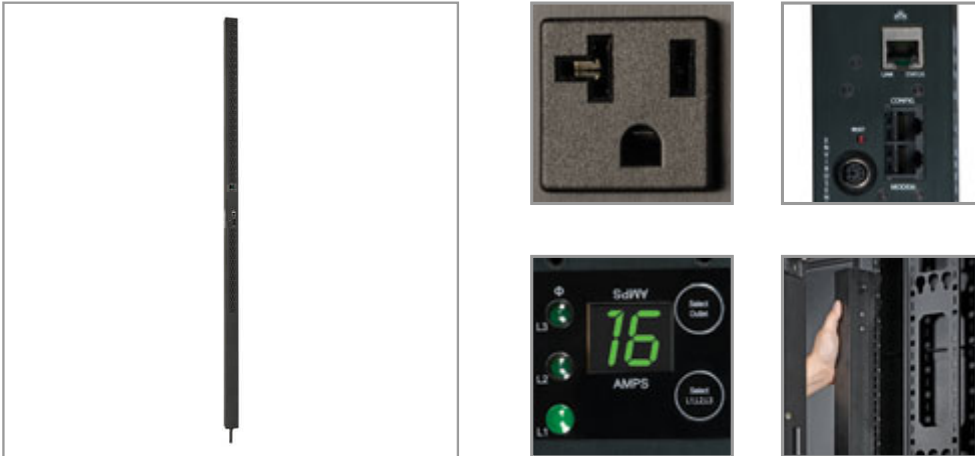

### Description

Tripp Lite 3 phase Monitored PDU / Power Distribution Unit offers real-time remote monitoring of voltage, frequency and load levels via built-in network connection. PowerAlert interface supports custom notification of user-specified remote conditions via email, secure web, SNMP, Telnet or SSH interface. PDU output current consumption in amps is displayed per-phase via front panel lighted digital display and can be monitored remotely to warn of potential overloads before critical IT mains breakers trip.

### Features

- 5.7kW 3 phase 208V Monitored Power Distribution Unit / PDU with built-in web/network interface
- Attached NEMA L21-20P 20A (3P+N+E) 208V 3 phase input plug with 10 ft. / 3m cord
- 0U, 70 in. / 178cm vertical form factor supports installation in 2 or 4 post equipment racks
- 36 total 120V NEMA 5-15/20R outlets arranged in three single phase output load banks
- Lighted display with scroll-button reports power consumption in amps for all 3 loading banks, IP-address self-identification and 180 degree display rotation for overhead or raised floor power feeds
- Built-in SNMP/ethernet interface reports voltage, frequency and PDU loading per-phase via network or secure web browser interface with options for user specified alarm and notification thresholds
- Supports in-rack environmental reporting with optional ENVIROSENSE temperature / humidity sensor and rack access notification with up to 4 optional SRSWITCH door sensors
- DHCP/Manual configuration support
- 10/100 Mbps auto-sensing allows optimal communication with 10/100 Base-T networks
- Real-time clock backup maintains the time of day and date even if the PDU is unpowered
- Tiered access privileges allow an administrator and a guest to login via web browser for monitoring
- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements

### Highlights

- Monitored 5.7kW 3 Phase 208V input PDU; 70 in. / 178cm 0U vertical rackmount
- Reports voltage, frequency and load per-phase via built in ethernet interface
- Visual current meter; Toolless button-mount installation
- NEMA L21-20P 20A (3P+N+E) 208V 3 phase input; 10 ft. / 3m line cord
- 36 5-15/20R single phase 120V outlets; Included cord retention brackets
- Temperature, humidity and contact closure monitoring options
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

### Package Includes

- Monitored rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual





- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

## Specifications

OVERVIEW	
UPC Code	037332157928
PDU Type	Monitored
OUTPUT	
Output Capacity Details	5.7kW (120V) total capacity / 16A max per output phase (L1, L2, L3); 16A max per outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(36) 5-15/20R
Output Nominal Voltage	120
Overload Protection	n/a
INPUT	
PDU Input Voltage	208
Recommended Electrical Service	20A 208V with NEMA L21-20R outlet
Maximum Input Amps	16
PDU Plug Type	NEMA L21-20P
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
Input Phase	3-Phase
USER INTERFACE, ALERTS & CONTROLS	
Reported Load Segments	Supports local monitoring of current for each output phase (16A max per L1, L2, L3); BANK "L1" is powered by L1-N; BANK "L2" is powered by L2-N; BANK "L3" is powered by L3-N
Front Panel LCD Display	Digital display reports output load level in amps separately for each output phase; Can also be used to scroll the configured IP address
Front Panel LEDs	Set of 3 LEDs (L1, L2, L3) indicate the output load segment the digital current display is reporting



Switches	SELECT switch advances the digital display and LED to report power consumption for load segments L1, L2 and L3; Press and hold the SELECT switch to rotate the digital display 90 degrees for overhead power input; Press and hold the SCROLL IP button to scroll the configured IP address
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	6.500 x 9.600 x 75.400
Shipping Dimensions (hwd / cm)	16.51 x 24.38 x 191.52
Shipping Weight (lbs.)	18.1000
Shipping Weight (kg)	8.21
Unit Dimensions (hwd / in.)	70 x 2.19 x 1.67
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 4.24
Unit Weight (lbs.)	10.1
Unit Weight (kg)	4.58
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Storage Temperature Range	5 to 122F (-15 to 50C)
Relative Humidity	5-95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL60950-1 (USA, Canada), NOM (Mexico), Class A (Emissions), ROHS, TAA Compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>