



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



3M Privacy Filter ALCF-P ABR2 Specifications

Data Sheet

November, 2011

Description This document provides customer specifications for Advanced Light Control Film ALCF-P ABR2

Applications ALCF-P ABR2 is a microreplicated film that controls the amount of light that passes through the film at high angles. At small angles, close to perpendicular to the surface of the privacy filter, the majority of the incident light is transmitted through the privacy filter. At angles outside of the 60 degree viewing angle, light is absorbed by the black louvers providing the user with privacy.

Material

Outer Substrates: Polycarbonate
Louver Layer: Acrylic Resin and Carbon Black


Typical Properties

Property (Test Method)	Typical Value
Viewing Angle	$60^{\circ} \pm 4^{\circ}$
Louver Angle	$0^{\circ} \pm 2^{\circ}$
Color	1931 CIE x Color Coordinate: 0.317 ± 0.02 1931 CIE y Color Coordinate: 0.335 ± 0.02
Nominal thickness	0.53 ± 0.08 mm
Heat resistance	60°C , 15% relative humidity, 7 days
Humidity resistance	40°C , 85% relative humidity, 7 days
Thermal shock resistance	-35° to 60° C for 10 total cycles at 11 hours per cycle

Unless otherwise noted, all tests are performed at room temperature

Viewing Angle Definition

- Viewing Angle – The sum of the angles (θ and ϕ), measured from the angle of maximum transmission, at which only 5% of the maximum transmission is transmitted through the film.

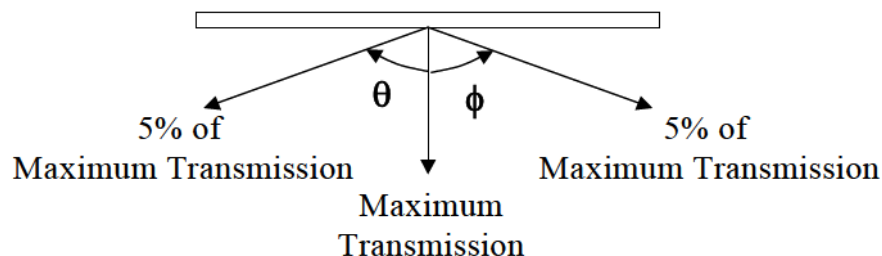

Attachment Each ALCF-P ABR2 Privacy Filter is accompanied with two types of attachment systems. The first is a selection of adhesive strips and the second is a set of adhesive guides.

Availability For availability, please contact our customer service group at 1-800-553-9215 or visit our website at 3mprivacyfilter.com

Important Notice

The following is made in lieu of all warranties, express or implied, including any implied warranties of merchantability or fitness for a particular purpose.

3M warrants that, at the time of shipment, product will meet 3M's published specification or that specification agreed in writing between 3M and purchaser. Should product not meet specifications at time of shipment, 3M will replace or refund the purchase price of such quantity of the product found not to meet specifications. Purchaser shall determine the suitability of the 3M Product for purchaser's application. **3M shall not be liable under any legal theory, including in contract or in tort, for any injury, loss, or damage, whether direct, indirect, incidental, special or consequential, arising out of the use of or the inability to use the product.**

The warranties and remedies set forth herein are purchaser's sole and exclusive warranties and remedies.

3M is a trademark of 3M Company



Mobile Interactive Solutions Division
Bldg. 235-1E-54/3M Center
St. Paul, MN 55144-1000
800-553-9215
www.3mprivacyfilter.com