



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

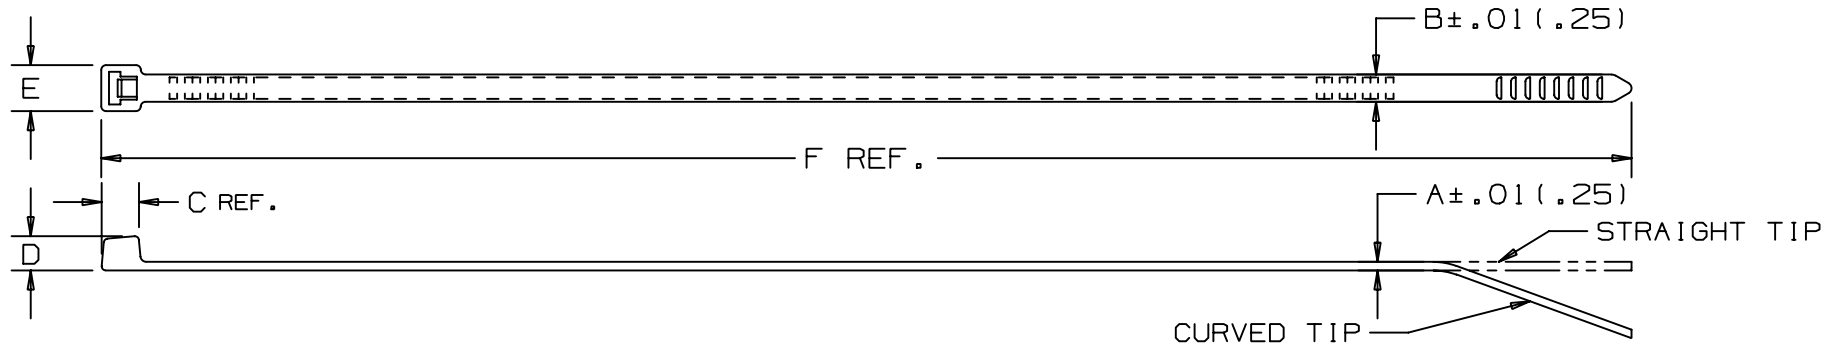

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-300	.06 (1.5)	.87 (22)	.035 (.9)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	18 (80)	MINIATURE	CURVED	.07 (32)
PLT1.5I-300	.06 (1.5)	1.38 (35)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	5.6 (142)	40 (178)	INTERMEDIATE	CURVED	.14 (64)
PLT2I-300	.06 (1.5)	2.00 (51)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	8.0 (203)	40 (178)	INTERMEDIATE	CURVED	.20 (91)
PLT1S-300	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	4.8 (122)	50 (222)	STANDARD	CURVED	.13 (58)
PLT2S-300	.06 (1.5)	1.88 (47.8)	.052 (1.3)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	7.4 (188)	50 (222)	STANDARD	CURVED	.29 (132)
PLT4S-300	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	14.5 (368)	50 (222)	STANDARD	CURVED	.56 (254)
PLT2H-300	.188 (4.8)	2.00 (51)	.075 (1.9)	.300 (7.6)	.320 (8.1)	.290 (7.4)	.480 (12.2)	8.4 (213)	120 (534)	HEAVY	STRAIGHT	.76 (346)
PLT4H-300	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.320 (8.1)	.290 (7.4)	.480 (12.2)	14.5 (368)	120 (534)	HEAVY	STRAIGHT	1.28 (581)

**NOTES:**

\*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

PAN-TY CABLE TIES  
HEAT STABILIZED WEATHER RESISTANT

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .005 (XXX) ± .020 (.51)  
(.XX) ± .02 (51) ANGLES ± .005

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
3	4/20/05	ERW	JVK	REMOVED TRADEMARK IN PART TITLE	26331	3	JVK	

DRAWN BY  
SO

DATE  
1-31-91

CHK'D  
HVP

MAT'L:  
HEAT STABILIZED  
WEATHER RESISTANT  
NYLON 6.6

SCALE  
NONE

DRAWING NO.  
SS-26331

DWG  
A  
SIZE