



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





- Economical And Easy To Install
- Resists Gasoline, Engine Chemicals And Cleaning Solvents
- Expands Up To 150%
- Cut And Abrasion Resistant
- FMVSS 302 Approval




Cut Cleanly
Hot Knife

Material	Polyethylene Terephthalate
Grade	PTN
Monofilament Diameter	.010"
Drawing Number	TF001PET-WD



www.techflex.com
800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

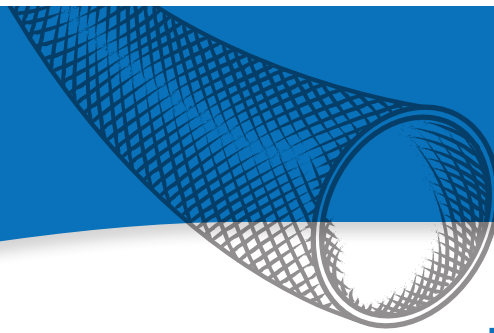

Put-Ups


Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
		Min	Max				
1/16"	PTN0.06	3/64"	3/32"	1,000'	250'		0.22
1/8"	PTN0.13	3/32"	1/4"	1,000'	225'		0.20
1/4"	PTN0.25	1/8"	7/16"	1,000'	200'		0.30
3/8"	PTN0.38	3/16"	1/2"	500'	125'		0.57
1/2"	PTN0.50	1/4"	3/4"	500'	100'	more than	0.77
5/8"	PTN0.63	3/8"	1"	500'	100'	30	0.95
3/4"	PTN0.75	1/2"	1 1/4"	250'	75'		1.20
1"	PTN1.00	5/8"	1 5/8"	250'	65'		1.34
1 1/4"	PTN1.25	3/4"	1 3/4"	250'	50'		1.60
1 1/2"	PTN1.50	1"	2 1/8"	200'	40'		1.96
1 3/4"	PTN1.75	1 1/4"	2 3/4"	200'	30'		2.45
2"	PTN2.00	1 1/2"	3 1/2"	200'	50'		2.60
2 1/2"	PTN2.50	1 3/4"	3 5/8"	200'	50'		3.80
3"	PTN3.00	2 1/2"	4 3/4"	100'	50'	BK,CL,NB,RE	4.00
3 END CONSTRUCTION							
1/4"	PT30.25	1/8"	3/8"	1,000'	200'	4	0.39
9 MIL CONSTRUCTION							
4"	PT94.00BK	4"	6 1/2"	100'	50'	BK	3.80
PET LEAN							
3/4"	PTL0.75BK	1/2"	1 1/4"	250'	75'	BK	1.04
1 1/4"	PTL1.25BK	3/4"	1 3/4"	250'	50'	BK	1.19

A Versatile Bundling And Protection Solution

The FLEXO® Original braided from 10 mil polyethylene terephthalate (PET) monofilament yarns. The material has a wide operating temperature range, is resistant to chemical degradation, UV radiation, and abrasion. Used in electronics, automotive, marine and industrial wire harnessing applications where cost efficiency and durability are critical.


The unique braided construction and wide expandability allows quick and easy installation over large connectors and long runs.

High thermal and chemical resistance and wide color/size selection make FLEXO® Original PET ideal for customizing and protecting the wires, hoses and cables in custom and classic colors.

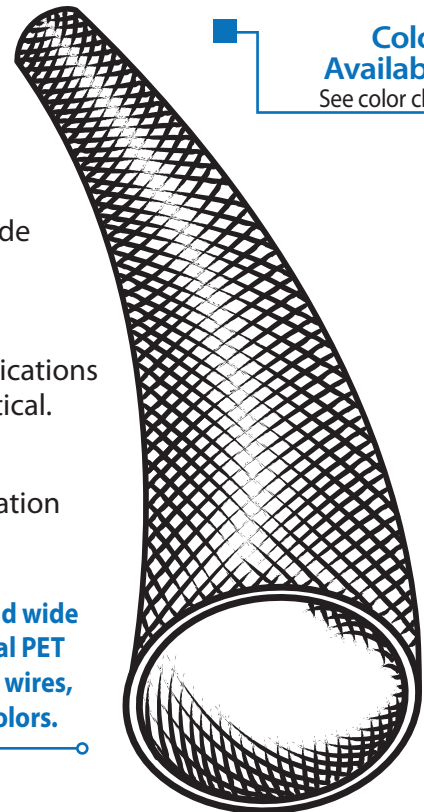

Colors Available:
See color chart



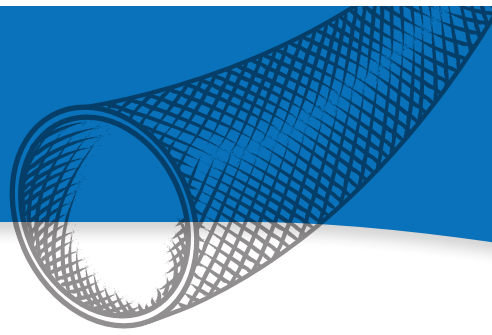

ABRASION FLAMMABILITY

Abrasion Resistance
Medium

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
77°F

Humidity
72%

Two Broken Filament
300 Test Cycles

Approximately 6 Broken
Filaments
500 Test Cycles

Material Destroyed
- Very Visible Hole In
Material
1,150 Test Cycles

Pre-Test Weight
4,547.4 mg

Post-Test Weight
4,133.9 mg

Test End Loss Of Mass
Point Of Destruction
413.5 mg

Rating _____ UL94VO, FAR25,
FMVSS-302

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Keytones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)




PHYSICAL PROPERTIES

Monofilament Diameter _____	.010
ASTM D-204	
Flammability Rating _____	UL94
FMVSS-302 Approved	
Recommended Cutting _____	Hot Knife
Colors _____	<30
Wall Thickness _____	.025
Tensile Strength (Yarn) _____	7.5
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.38
Moisture Absorption _____	.1-.2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.19
CVCM _____	.00
WVR _____	.16
Smoke D-Max _____	.56
ASTM E-662	
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	




GENERAL PURPOSE
Technical Data Sheet

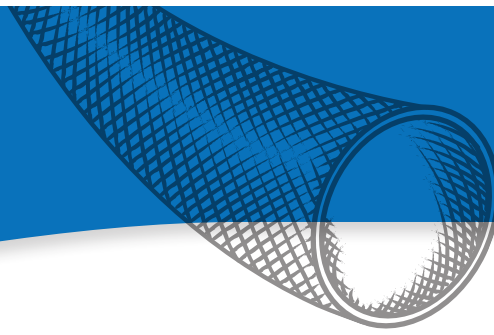

WH White



CF Checkered Flag



PG Platinum Gray



SK Snake



BR Brown



AQ Aqua



RD Red



OR Orange




YL Yellow



GN Green




BL Blue



PP Purple



CL Clear



BK Black



CB Carbon



BE Beige



GY Gray



DP Dark Purple



* NR Neon Red



* NP Neon Pink




* NY Neon Yellow




* NG Neon Green



* NB Neon Blue



* NO Neon Orange



PT Patriot




* NX Nitrox




* JS Jester




* OG Ogre



* SH Super Hero




SS Safety Stripe

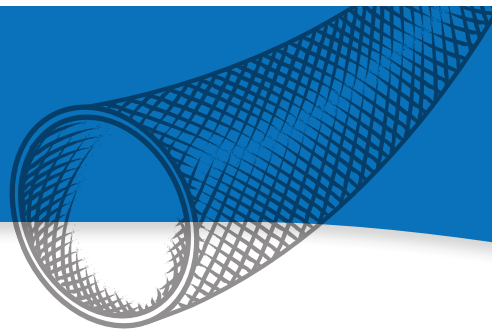

RE Reggae

■ Custom combination colors manufactured by Techflex

■ The possibilities are endless!



CC Candy Cane



AL Alien




MO Monochrome



GW Gray White




DS Desert




RS Red Spiral




UG Uptown Green




UY Uptown Yellow




UR Uptown Red



UP Uptown Purple



UB Uptown Blue




UX Uptown Gold



CO Coral




HH Hip Hop




SB Sherbert



TL Twilight



RW Rainbow




HO Holiday



BB Black Beige




GD Ground Wire




SM Shimmer



CK Corn Kernel



RC Rainbow Clear



RB Rainbow Black