

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China













PANEL MOUNTING
MAX. PANEL THICKNESS 8.0mm

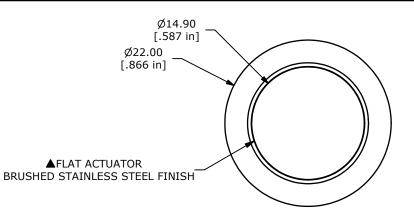

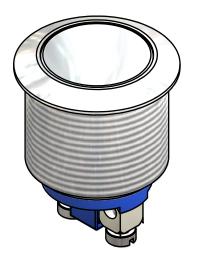



▲	SWITCH FUNCTION			
	POS. 1	POS. 2		
	OFF	(ON)		
	OPEN	1-2		
	(ON) - MC	MENTARY		

(ON) = MOMENTARY

## NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE:  $X.X = \pm 0.4$  $X.XX = \pm 0.25$
- 3. TERMINAL NOS. FOR REF. ONLY
- ▲4. FUNCTION: SPST
- ▲ 5. RATING: 2A @ 48VDC
- 6. CONTACT RESISTANCE:  $50m\Omega$  MAX. @ 1A 12VDC
- 7. INSULATION RESISTANCE:  $1,000M\Omega$  @ 500VDC
- 8. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- 9. ELECTRICAL LIFE: 200,000 CYCLES
- 10. CONTACT MATERIAL: GOLD PLATED
- 11. OPERATING TEMPERATURE: -20°C TO 55°C
- 12. INGRESS PROTECTION: IP65
- 13. ▲DENOTES CRITICAL PARAMETER
- 14. 2002/95/EC (ROHS) COMPLIANT
- ▲15. HARDWARE INCLUDED: HEX NUT AND O-RING (NOT SHOWN)

▲ BODY FINISH  BRUSHED STAINLESS STEEL					
2.00±.50 [.079±.020 in] M19x1.0					

Α	20468	RELEASE FOR PRODUCTION	02/08/12	ВМА			
REV	REV PCR NO DESCRIPTION		DATE	BY			
THE INFORMATION CONTAINED IN THIS BOOK MENT IS BRORDIETABLY							

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

	Ū.	E+SWITCH					
TITLE PV1F640BBG		BBG					
	SCALE 2:1	DATE 2/8/2012	DR BMA	DWG 52-PV1F640BBG	REV <b>Δ</b>		