



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# PW182RA

Universal 19 Watt (IEEE802.3af Non-Compliant)



## PoE Gigabit

- 10/100/1000 (MbPS) Data Rates
- 100-240VAC Universal Input
- Self-contained Injector
- Desktop Style / Non-vented Case
- Power On LED
- UNH IOL Test Report
- Over Load Shutdown and Short Circuit Protection
- Regulated Output With Low Ripple
- Complies with EMI/RFI Regulations
- CE Compliant



## International Safety Standard Approvals



## Specifications

### Output Specifications

Combined Line and Load Voltage Regulation	Excluding Cord	±1%
Ripple		1% Vp-p max.
Transient Response		0.5ms for 50% Load Change Typical
Protection		Foldback Overcurrent Protection, Short Circuit Protection

### Input Specifications

AC Input Voltage Range		100-240VAC -10%, +10%
Line Frequency		47-63Hz
AC Input Current	90VAC Input	0.6A max.
Protection		Internal Primary Current Fuse, Inrush Limiting

### Environmental Specifications

Thermal Performance	Operating Temperature No Derating, Convectional Cooling Non Vented Case	0° C to 40° C
Relative Humidity	Non-Condensing	5% to 95%
Altitude		0-10,000 feet

### General Specifications

Topology		Switching-Fixed Frequency Flyback
Dielectric Withstand	Primary-Secondary Secondary-Ground	3000VAC, 4250VDC 500VDC
Spacing		5mm Primary-Secondary
Leakage Current		Less than 250 uA
Efficiency		65% Typical @ Max Load and 120VAC/60 Hz
EMC Information		
Emissions	FCC Part 15. EN55022.	Class B Class B
Harmonic VFF	EN61000-3-2 EN61000-3-3	
ESD	EN61000-4-2.	Level 2
RF EMI	EN61000-4-3.	Level 2
EFT	EN61000-4-4.	Level 2
Surge	EN61000-4-5.	Level 3
CDI	EN61000-4-6.	Level 2
CD	EN61000-4-8.	Level 1
Voltage Dips	EN61000-4-11	
CE	LVD, EMC, RoHS, WEEE, CE Compliant	
Hold-up Time	@120VAC @240VAC	10ms min. 30ms min.
Storage Temp		-30° C to +85° C

# PW182RA

Universal 19 Watt (IEEE802.3af Non-Compliant)

PoE Gigabit

For the most current data and application support visit [www.slpower.com](http://www.slpower.com)

Ault Part Number	Output Voltage	Output Currents		Max Watts	Ripple Vp-p max.
		Min	Max		
PW182RA4800_01	48 V	0.00 A	0.40 A	19 W	480 mV

## Ault Part Number Key

PW182	R	A	48	00	_	01
Product Family Name	Manufacturing Location (volume dependent)	Design Revision Changes	Voltage DC Model Type	Connector	Input Configuration/ DC Model Type	Standard (no modifications or special packaging)

## Input Configuration



IEC320  
w/ground  
C14  
(F)



Shaver  
C8  
(N)

Note: Call for optional configurations, extra charges may apply.

Specify the Input Configuration Code in your order.

## General Specifications (continued from p. 1)


Approvals and Standards	Safety	cULus : UL/CSA60950 TUV : EN60950 CE: LVD, EMC
MTBF		100,000 Calculated Hours
Weight		7 Ounces, 200 Grams
Case and Dimension		5.24L x 2.13W x 1.42H (in) 133.0L x 54.0W x 36.0H (mm)
Case Material		Impact Resistant Polycarbonate Enclosure
Cord and Connectors		Dual RJ45 jacks built into the enclosure

## Personalized PoE

Options (additional costs may apply):

- Energy Star (LED must be removed to meet)
- Custom label artwork
- Custom agency approvals available
- Surge protection (Input & Output)
- Mounting bracket
- Custom PoE modifications

## Pin Connections

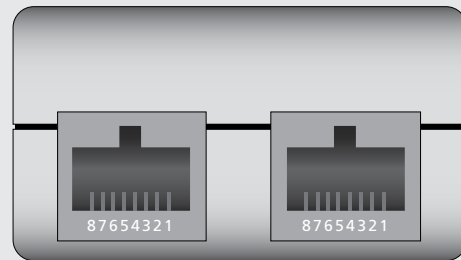


J2  
(Power and Data Out)

J1  
(Data In)

(Rear of Unit)

### PoE Gigabit Pin-out Connections:

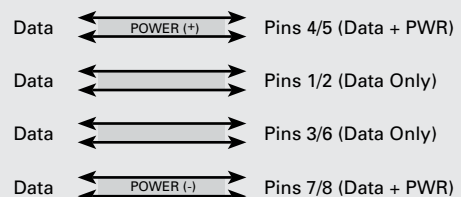

Note: ← → = Transformer



SL Power Electronics Corp • 6050 King Drive • Ventura, CA 93003 • Phone:805.486.4565 • Fax:805.487.8911 • Email:[info@slpower.com](mailto:info@slpower.com) • [www.slpower.com](http://www.slpower.com)

Data Sheet © 2007 SL Power Electronics Corp. The information and specifications contained in this data sheet are believed to be correct at time of publication.

However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.

Rev.12/21/07