



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

Unregulated Converter

- 1 : 1 Input Range
- 0.25W SMD Package
- Efficiency up to 77%
- 1kVDC and 2kVDC Isolation Option
- Operating Temperature from -40°C to +100°C
- EN/UL60950-1 Certified

Description

The R0.25S/E series DC/DC converter has been designed to offer exceptionally high efficiency, low quiescent current and an extended operating temperature range. Uses include battery powered supplies, high efficiency designs or high temperature applications.

Selection Guide

Part Number SMD	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	Max Capacitive Load ^{(1)**}
R0.25S**-3.305/E*	3.3	5	50	75	1000µF
R0.25S**-0505/E*	5	5	50	77	1000µF
R0.25S**-1205/E*	12	5	50	74	1000µF

Other input and output voltage combinations available on request.

*add Suffix „H“ for 2kVDC Isolation, e.g. R0.25S-3.305/HE

*add Suffix „-R“ for tape & reel packaging, e.g. R0.25S-3.305/E -R

*add Suffix „P“ for Continuous Short Circuit Protection, e.g. R0.25S/PE

**without marking denotes 5 pins out of 8 fitted (includes „H“ option)

with marking 8 denotes 8 pins out of 8 fitted („H“ option not available), e.g. R0.25S8-3.305/E

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage full load and after warm up)

Input Voltage Range		$\pm 10\%$ max.
Voltage Set Accuracy	100% Load/nominal V_{in}	-2% typ. / $\pm 5\%$ max.
Line Regulation	Low Line to High Line @ max. Load	1,2% typ.
Load Regulation	(10% to 100% Load)	4% typ. / 10% max.
Ripple & Noise @ 20MHz BW		50mVp-p typ. / 100mVp-p max.
Efficiency	100% Load	70% min.
Operating Temperature		-40°C to + 100°C
Storage Temperature		-55°C to +125°C
Isolation Test Voltage	(tested for 1 second) (rated for 1 minute***)	1000VDC 500VAC / 60Hz
Isolation Test Voltage	H-Suffix (tested for 1 second) (rated for 1 minute***)	2000VDC 1000VAC / 60Hz
Isolation Capacitance		75PF max.
Isolation Resistance	Viso = 500V	10 GΩ min.
Humidity		95% max.
Operating Frequency	V_{in} (nom.)	20kHz min. / 70 kHz max.
Short-Circuit Protection		1 Second
MTBF	Using MIL-HDBK 217F (+100°C)	1352 x 10 ³ hours
	Using MIL-HDBK 217F (+25°C)	4494 x 10 ³ hours

Detailed Information see Application Notes chapter „MTBF“

Weight		1.0g
Certification		
UL General Safety	Report: E224736	UL60950-1
EN General Safety		EN60950-1

***Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM


0.25 Watt SMD Isolated Single Output



EN-60950-1 Certified
UL-60950-1 Certified

R0.25S/E

Derating-Graph (Ambient Temperature)



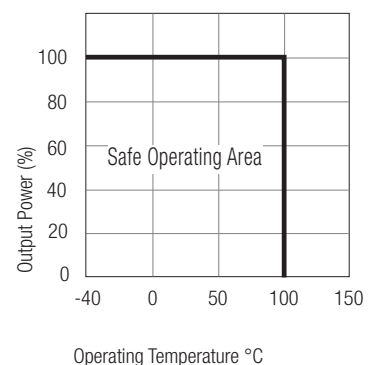


Refer to Application Notes

Typical Characteristics

Tolerance Envelope



R0.25S-xx05/E

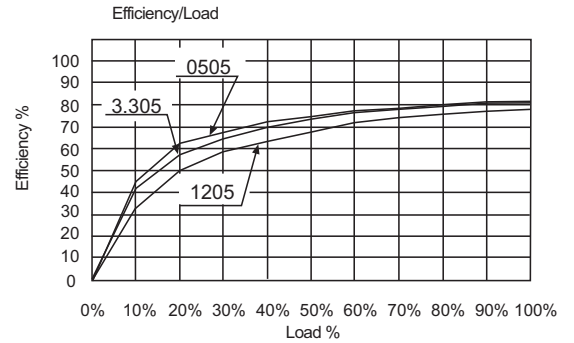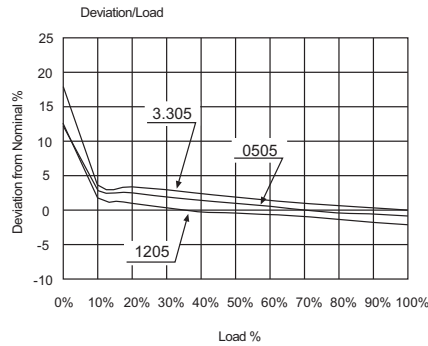

Notes

Note1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1second without damage to the converter.

Package Style and Pinning (mm)

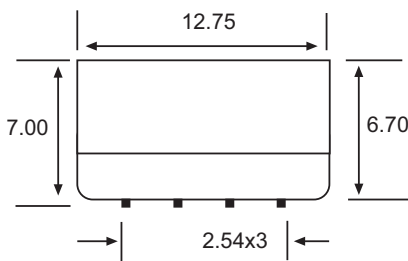

Pin Connections



Pin #	Function for 5 Pins	Function for 8 Pins
1	-Vin	-Vin
2	+Vin	+Vin
4	-Vout	-Vout
5	+Vout	+Vout
3, 6, 7	NA	NC
8	NC	NC

NC= No Connection

NA= No Available Electrical Connection

UNIT: mm

TOL.: ± 0.25 mm

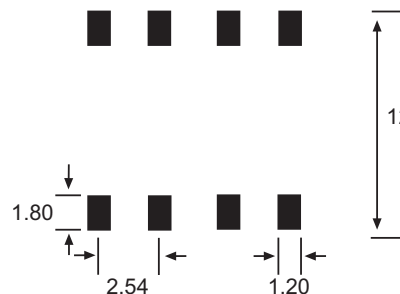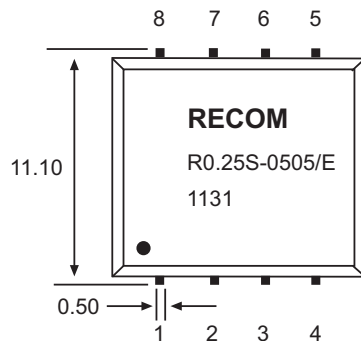

Footprint

R0.25S/E

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.