



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# R4E310 Series


Motorized Impeller



## Ø 310mm Backward Curved 3D Impeller

- These new backward curved centrifugal fans feature twofold-curved blades. These impellers have improved efficiency and reduced noise.
- Impeller completely made of aluminium.
- Maintenance-free ball bearings.
- Cable exit: variable. Direction of rotation is CW as seen from intake side.
- UL, CSA, VDE approvals on most models, please contact application engineering.
- Recommended inlet ring: 31051-2-4013.

Part Number	Curve	CFM @ D	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Capacitor (µF)	Speed (RPM)	Wgt. (lbs)
R4E310-AO32-11	1	1177	115	60	185	66	60	16	1720	7.9
R4E310-AP15-11	2	1330	115	60	180	63	50	16	1550	8.4
R4E310-AQ29-11	3	1430	115	60	225	65	60	20	1700	9.7
R4E310-AR06-01	4	1148	230	60	125	66	65	4	1650	7.3
R4E310-AO34-12	1	1177	230	60	170	66	60	3	1720	7.9
R4E310-AP11-12	2	1330	230	60	175	63	50	4	1580	8.4
R4E310-AS06-01	5	1401	230	60	160	62	50	4	1530	7.5
R4E310-AQ31-12	3	1430	230	60	240	65	50	5	1700	9.7
R4E310-AO12-10	1	1177	277	60	165	66	60	4	1720	7.9
R4E310-AP21-10	2	1330	277	60	170	63	55	3	1560	8.4
R4E310-AQ19-10	3	1430	277	60	210	65	60	4	1670	9.7

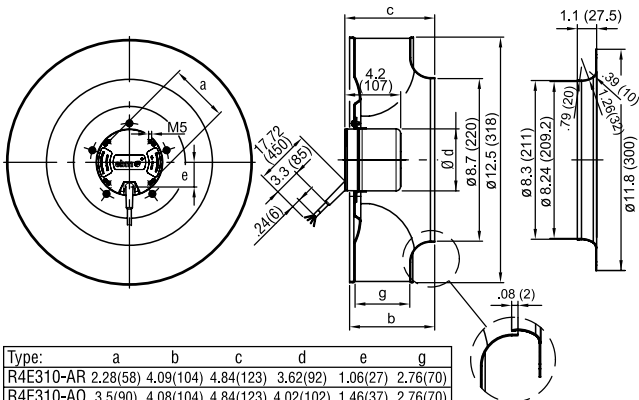

Type:	a	b	c	d	e	g
R4E310-AR	2.28(58)	4.09(104)	4.84(123)	3.62(92)	1.06(27)	2.76(70)
R4E310-AO	3.5(90)	4.08(104)	4.84(123)	4.02(102)	1.46(37)	2.76(70)
R4E310-AP	3.5(90)	5.47(139)	6.06(154)	4.02(102)	1.46(37)	3.98(101)
R4E310-AS	2.28(58)	5.47(139)	6.06(154)	3.62(92)	1.06(27)	3.98(101)
R4E310-AQ	3.5(90)	5.47(139)	6.06(154)	4.02(102)	1.46(37)	3.98(101)

