



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# RI-23 Series Dry Reed Switch

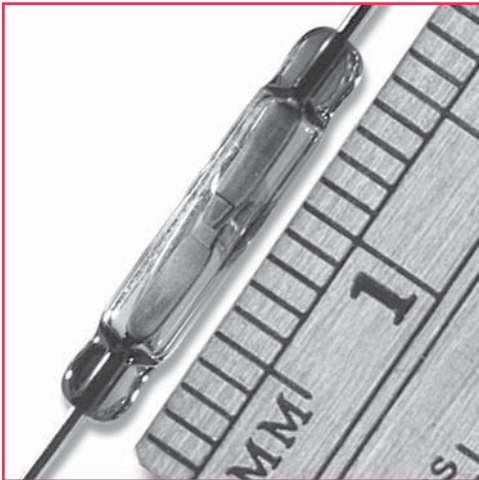

## RI-23 Series


Micro dry-reed switch hermetically sealed in a gas-filled envelope. Single-pole, single-throw (SPST) type, having normally open contacts, and containing two magnetically actuated reeds.

The switch is of the double-ended type and may be actuated by an electromagnet, a permanent magnet or a combination of both.

The device is intended for use in sensors, relays, pulse counters or similar devices.

## RI-23 Series Features

- ◆ General purpose reed switch
- ◆ Contact layers: gold, plated ruthenium
- ◆ Superior glass-to-metal seal and blade alignment
- ◆ Excellent life expectancy and reliability

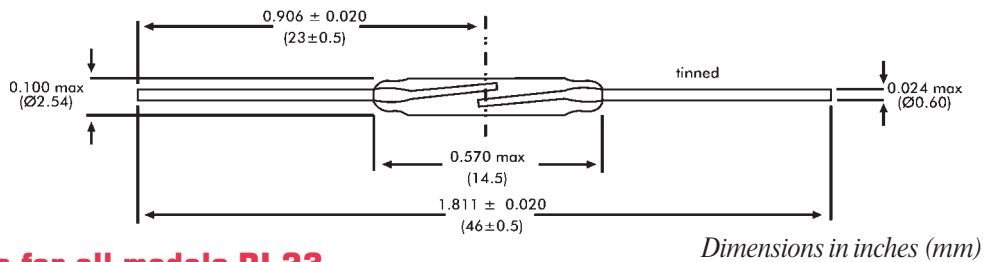

## General data for all models RI-23

### AT-Customization / Preformed Leads

Besides the standard models, customized products can also be supplied offering the following options:

- Operate and release ranges to customer specification
- Cropped and/or preformed leads

### Coils

All characteristics are measured using the Philips Standard Coil. For definitions of the Philips Standard Coil, refer to "Application Notes" in the *Reed Switch Technical & Application Information* Section of this catalog.

### Life expectancy and reliability

The life expectancy data given below are valid for a coil energized at 1.25 times the published maximum operate value for each type in the RI-23 series.

#### No load conditions (operating frequency: 100Hz)

Life expectancy : min.  $10^8$  operations with a failure rate of less than  $10^{-9}$  with a confidence level of 90%.

End of life criteria:

Contact resistance >  $1\Omega$  after 2 ms

Release time > 2 ms (latching or contact sticking).

#### Loaded conditions (resistive load: 12 V; 4 mA; (15 mA peak); operating frequency: 170 Hz)

Life expectancy: min.  $10^7$  operations with a failure rate of less than  $10^{-8}$  with a confidence level of 90%.

End of life criteria:

Contact resistance >  $2\Omega$  after 4 ms

Release time > 0.7 ms (latching or contact sticking).

Switching different loads involves different life expectancy and reliability data. Further information is available on request.

### Mechanical Data

Contact arrangement is normally open; lead finish is tinned; net mass is approximately 190 mg; and can be mounted in any position.

### Shock

The switches are tested in accordance with "IEC 68-2-27", test Ea (peak acceleration 150 G, half sinewave; duration 11 ms). Such a shock will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.



# RI-23 Series Dry Reed Switch

Model Number			RI-23AAA	RI-23AA	RI-23A	RI-23B	RI-23C
Parameters	Test Conditions	Units					
<b>Operating Characteristics</b>							
Operate Range		AT	8-16	14-23	18-32	28-52	46-70
Release Range		AT	4-14	7.5-17.5	8-22	12-29	16-32
Operate Time - including bounce (typ.)	energization 100 AT	ms	0.1 (20AT)	0.25 (29AT)	0.25 (40AT)	0.25 (65AT)	0.25 (88AT)
Bounce Time (typ.)	energization 100 AT	ms	0.05 (20AT)	0.15 (29AT)	0.15 (40AT)	0.15 (65AT)	0.15 (88AT)
Release Time (max)	energization 100 AT	$\mu$ s	70 (20AT)	30 (29AT)	30 (40AT)	30 (65AT)	30 (88AT)
Resonant Frequency (typ.)		Hz	5500	5500	5500	5500	5500
<b>Electrical Characteristics</b>							
Switched Power (max)		W	10	10	10	10	10
Switched Voltage DC (max)		V	200	200	200	200	200
Switched Voltage AC, RMS value (max)		V	140	140	140	140	140
Switched Current DC (max)		mA	250	500	500	500	500
Switched Current AC, RMS value (max)		mA	250	500	500	500	500
Carry Current DC (max)		A	1	1.5	2.5	2.5	2.75
Breakdown Voltage (min)		V	200	275	325	400	500
Contact Resistance (initial max)	(energization)	m $\Omega$	100 (20 AT)	100 (25 AT)	100 (30AT)	100 (40 AT)	100 (40 AT)
Contact Resistance (initial typ.)	(energization)	m $\Omega$	70 (20 AT)	70 (25 AT)	70 (30 AT)	70 (40 AT)	70 (40 AT)
Contact Capacitance (max)	without test coil	pF	0.3	0.3	0.25	0.25	0.25
Insulation Resistance (min)	RH $\leq$ 45%	M $\Omega$	10 <sup>6</sup>	10 <sup>6</sup>	10 <sup>6</sup>	10 <sup>6</sup>	10 <sup>6</sup>

## Vibration

The switches are tested in accordance with “IEC 68-2-6”, test Fc (acceleration 10G; below cross-over frequency 57 to 62 Hz; amplitude 0.75 mm; frequency range 10 to 2000 Hz, duration 90 minutes). Such a vibration will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

## Mechanical Strength

The robustness of the terminations is tested in accordance with “IEC 68-2-21”, test Ua<sub>1</sub> (load 40 N).

## Operating and Storage Temperature

Operating ambient temperature; min: -55°C; max: +125°C. Storage temperature; min: -55°C; max: +125°C. **Note:** Temperature excursions up to 150°C may be permissible. For more information contact your nearest Coto Technology sales office.

## Soldering

The switch can withstand soldering heat in accordance with “IEC 68-2-20”, test Tb, method 1B:solder bath at 350  $\pm$ 10 °C for 3.5  $\pm$ 0.5 s. Solderability is tested in

accordance with “IEC 68-2-20”, test Ta, method 3: solder globule temperature 235°C; ageing 1b: 4 hours steam.

## Welding

The leads can be welded.

## Mounting

The leads should not be bent closer than 1 mm to the glass-to-metal seals. Stress on the seals should be avoided. Care must be taken to prevent stray magnetic fields from influencing the operating and measuring conditions.