



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Features

## Unregulated Converters

- UL/CSA and EN-60950-1 Safety certified
- EN-60601 for Medical Applications
- 6kVDC Isolation
- Optional Continuous Short Circuit Protection
- Efficiency up to 82%
- Space Saving „Skinny DIP“ Package
- Very Low Isolation Capacitance
- Suitable for IGBT Applications

### Description

Very high isolation in a small size are the main features of this miniature DIP24 converter, ideal for highly sophisticated industrial, test and measurement and medical designs where board space is at a premium.

### Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency Std (%)	Max Capacitive Load <sup>(1)</sup>
RV-xx3.3S*	3.3, 5, 12, 15, 24	3.3	600	70	3300µF
RV-xx05S*	3.3, 5, 12, 15, 24	5	400	70-75	1200µF
RV-xx09S*	3.3, 5, 12, 15, 24	9	222	70-75	1200µF
RV-xx12S*	3.3, 5, 12, 15, 24	12	167	70-75	680µF
RV-xx15S*	3.3, 5, 12, 15, 24	15	132	75-80	680µF
RV-xx24S*	3.3, 5, 12, 15, 24	24	83	75-80	220µF
RV-xx3.3D*	3.3, 5, 12, 15, 24	±3.3	±300	70	±1500µF
RV-xx05D*	3.3, 5, 12, 15, 24	±5	±200	70-75	±470µF
RV-xx09D*	3.3, 5, 12, 15, 24	±9	±111	70-75	±470µF
RV-xx12D*	3.3, 5, 12, 15, 24	±12	±85	70-75	±220µF
RV-xx15D*	3.3, 5, 12, 15, 24	±15	±66	75-80	±220µF
RV-xx24D*	3.3, 5, 12, 15, 24	±24	±42	75-80	±100µF
RV-xx1509D	5, 12, 24	+15/-9	+67/-111	70-82	±330µF

xx = Input Voltage. Other input and output voltage combinations available on request.

\* add Suffix "P" for Continuous Short Circuit Protection, e.g. RV-0505S/P, RV-0505D/P

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

Input Voltage Range	±10%
Output Voltage Accuracy	±5%
Line Voltage Regulation	1.2%/1% of $V_{in}$ typ.
Load Voltage Regulation (10% to 100% full load)	3.3V output types 20% max. 5V output type 15% max. 9V, 12V, 15V, 24V output types, RV-xx1509D 10% max.
Output Ripple and Noise (20MHz limited)	200mVp-p max.
Operating Frequency	20kHz min. / 50kHz typ. / 85kHz max. RV-xx1509D 20kHz min. / 47kHz typ.
Efficiency at Full Load	70% min. / 75% typ.
Minimum Load = 0%	Specifications valid for 10% minimum load only.
Isolation Voltage	(tested for 1 second) 6000VDC (rated for 1 minute**) 3000VAC / 60Hz
Isolation Capacitance	2pF min. / 12pF max.
Isolation Resistance	15 GΩ min.
Short Circuit Protection	1 Second
P-Suffix	Continuous
Operating Temperature Range (free air convection, without derating)	-40°C to +90°C (see Graph)
Storage Temperature Range	-55°C to +125°C

continued on next page


## ECONOLINE

### DC/DC-Converter

with 3 year Warranty

# RECOM


## 2 Watt DIP24 Miniature Single & Dual Output

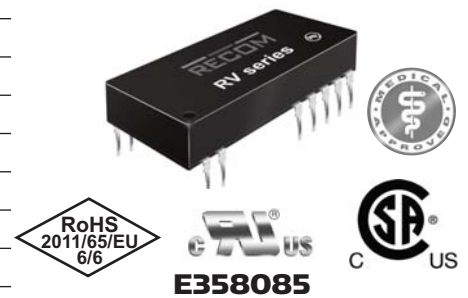

**EN-60950-1 Certified**  
**IEC/EN-60601-1 Certified\***  
**UL/CSA 60950-1 Certified\***  
\* +15/-9 Version excluded

# RV

## Derating-Graph (Ambient Temperature)

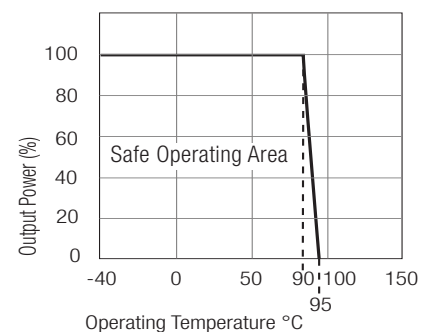

\*\*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Refer to Application Notes


## Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

Relative Humidity				95% RH
Package Weight				9g
Packing Quantity				15 pcs per Tube
MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	1154 x 10 <sup>3</sup> hours	
(+85°C)		using MIL-HDBK 217F	168 x 10 <sup>3</sup> hours	
Certifications	UL/cUL General Safety	Report: E358085	UL 60950-1 2nd Ed.	
	EN General Safety	Report: SPCLVD1109103	EN60950-1:2006 + A12: 2011	
	EN Medical Safety	Report: SPCMDD1205098-4	IEC/EN60601-1:2006, 3rd Edition	

### Notes



Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

## Tolerance Envelope





## Typical Characteristics

### RV-xx05S

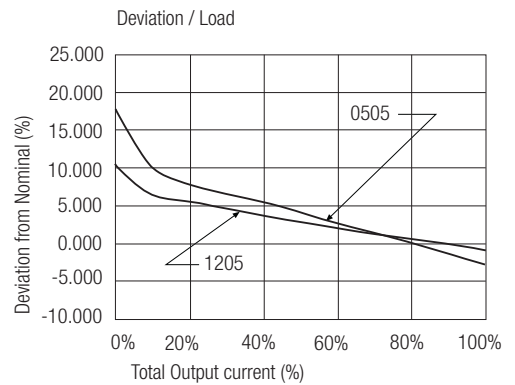
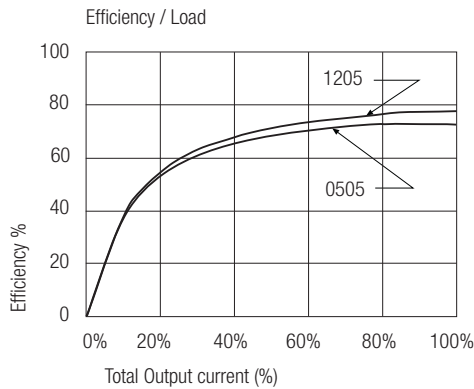


### RV-xx12S

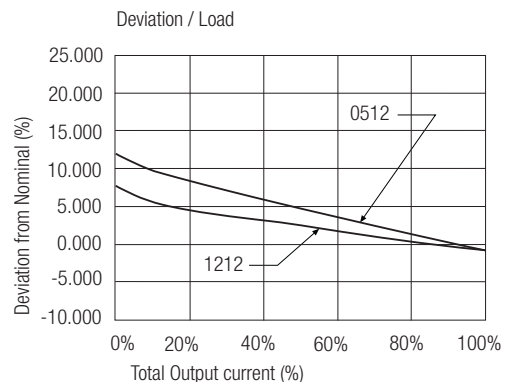
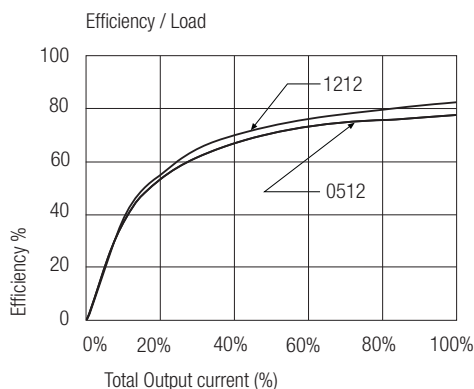


Typical Characteristics

**RV-xx05D**

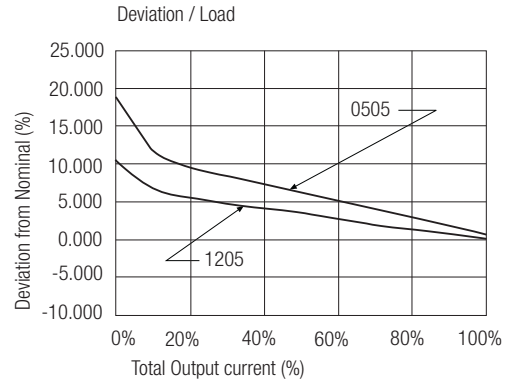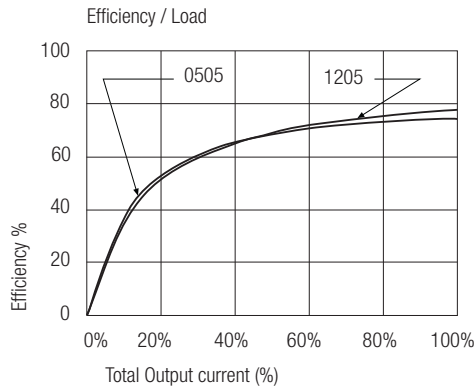


**RV-xx12D**

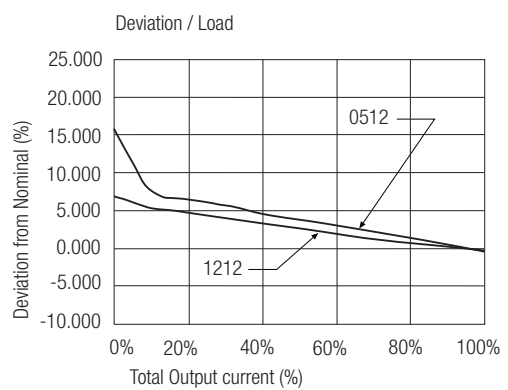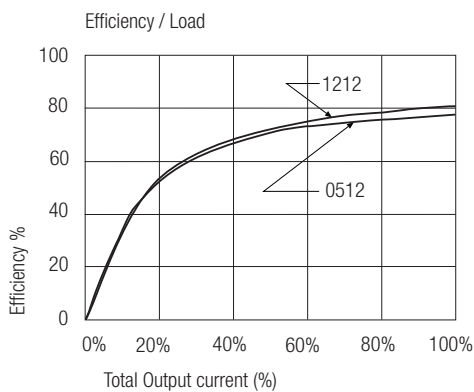


Applications

**IGBT Application  
Circuit**

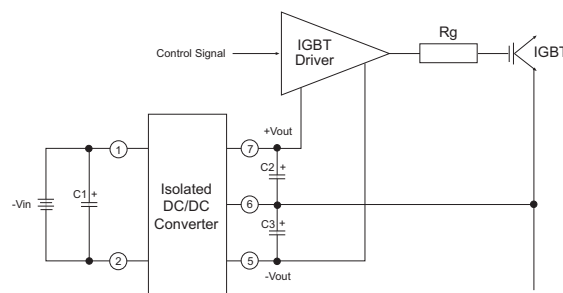


**Package Style and Pinning (mm)**

**24 PIN DIP Miniature Package Style**

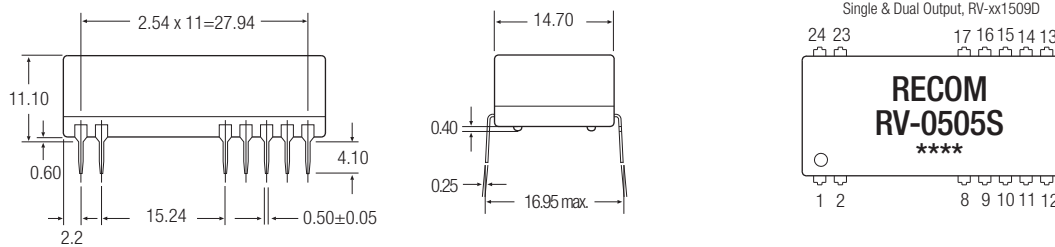

**Recommended Footprint Details**

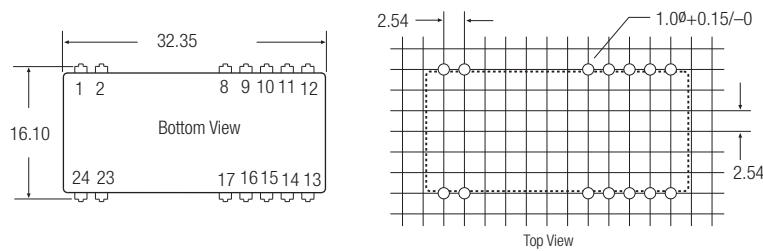

Pin Connections		Pin Connections	
Pin #	Single	Pin #	Dual
1	+Vin	1	+Vin
2	-Vin	2	-Vin
8, 9, 11, 14	NC	8, 17	-Vout
10, 15	-Vout	9, 11, 14, 16, 23, 24	NC
12 & 13	+Vout	10 & 15	Com
16, 17, 23, 24	NC	12, 13	+Vout
NC = No Connection		NC = No Connection	

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm