

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SMD POWER INDUCTORS

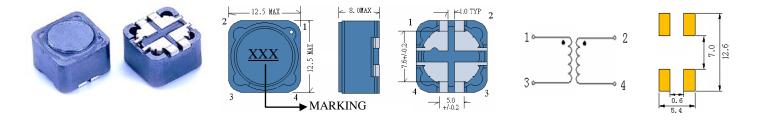



- Features
- 1. Magnetically shielded construction
- 2 Excellent Power Density
- 3 Engineered to Provide High Efficiency

ELECTRICAL CHARACTERISTICS



Part Number	Inductance	Test	DC Resistance	Saturation	Temperature	TURN
T div T (dilloc)	(uH)	Frequency	(Ω MAX)	Current	Current	RATIO
	(1)		(2)	(A)	(A)	(L1:L2)
SCRHB127-7622	L1=7.6	1KHZ	31m	7.00	5.00	1:2.2
	L2=38	1KHZ	180m	3.20	2.40	
SCRHB127-1022	L1=10	1KHZ	38m	4.50	4.50	1:2.2
	L2=45	1KHZ	200m	2.00	2.20	
SCRHB127-1042	L1=10	1KHZ	33m	4.50	4.70	1:4.2
	L2=160	1KHZ	650m	1.00	1.00	

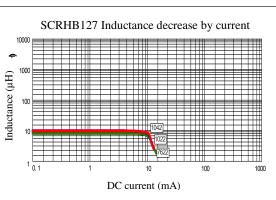

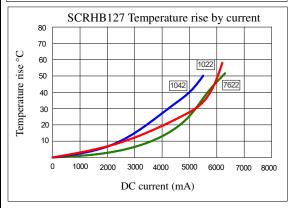

- (1). Inductance tolerance $\,\pm20\%$ tested at 0.25V, 0ADC and 25°C
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 25% from its initial value.
- (4). The DC current that results in a $40^{\circ}\text{C}\,$ temperature rise from $25^{\circ}\text{Cambient}.$

Click here for QUANTITY PER REEL & PACKING INFORMATION

Custom versions available upon request.

©2011 Signal Transformer – Specification subject to change without notice. 07.11

