



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SERIES

SDS850R



Surface Mount Shielded Power Choke

DASH NUMBER*
 INDUCTANCE (μH)
 TOLERANCE
 TEST FREQUENCY (kHz)
 DC RESISTANCE MAXIMUM (OHMS)
 CURRENT RATING MAXIMUM (mA)

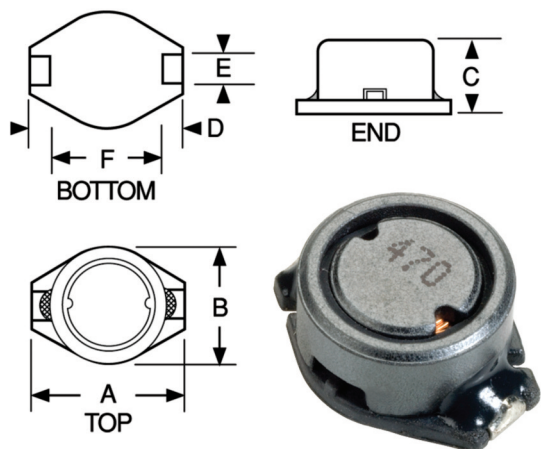

Physical Parameters

	Inches	Millimeters
A	0.413 ±0.008	10.5 ±0.2
B	0.315 ±0.008	8.0 ±0.2
C	0.190 Max.	4.8 Max.
D	0.083 ±0.008	2.1 ±0.2
E	0.079 ±0.008	2.0 ±0.2
F	0.236 ±0.012	6.0 ±0.3
G	0.224 Ref.	5.7 Ref.
H	0.094 Ref.	2.4 Ref.
I	0.087 Ref.	2.2 Ref.

Current rating at 25°C Ambient
 40°C Max. Rise

Operating Temperature Range
 -40°C to +85°C

Weight Maximum
 0.95 grams

Marking For values lower than 10 μH the R indicates a decimal point and the remaining digits indicate the inductance in μH. For values 10 μH and above, the first two digits indicate the inductance in μH and the third digit indicates the number of trailing zeros where a zero indicates that there are no trailing zeros.

Example: SDS850R-392N (3.9 μH)
 3R9

Example: SDS850R-105M (1,000 μH)
 102

Packaging

Tape & Reel (16mm): 13" reel
 1000 pieces max.

SERIES SDS850 FERRITE CORE & SLEEVE					
-222N	2.2	±30%	100	0.040	2500
-392N	3.9	±30%	100	0.055	2100
-562N	5.6	±30%	100	0.065	1950
-822N	8.2	±30%	100	0.080	1750
-103M	10	±20%	1	0.100	1500
-123M	12	±20%	1	0.120	1400
-153M	15	±20%	1	0.140	1300
-183M	18	±20%	1	0.160	1200
-223M	22	±20%	1	0.180	1100
-273M	27	±20%	1	0.200	1000
-333M	33	±20%	1	0.240	920
-393M	39	±20%	1	0.260	840
-473M	47	±20%	1	0.280	750
-563M	56	±20%	1	0.380	680
-683M	68	±20%	1	0.440	600
-823M	82	±20%	1	0.550	540
-104M	100	±20%	1	0.600	500
-124M	120	±20%	1	0.750	450
-154M	150	±20%	1	0.900	400
-184M	180	±20%	1	1.050	350
-224M	220	±20%	1	1.180	300
-274M	270	±20%	1	1.40	270
-334M	330	±20%	1	1.80	240
-394M	390	±20%	1	2.10	220
-474M	470	±20%	1	2.25	200
-564M	560	±20%	1	3.00	180
-684M	680	±20%	1	3.40	170
-824M	820	±20%	1	4.00	160
-105M	1000	±20%	1	5.00	150

*Complete part # must include series # PLUS the dash #
 For surface finish information, refer to www.delevanfinishes.com

