



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Schnelle PIN-Fotodiode

High Speed PIN Photodiode

Lead (Pb) Free Product - RoHS Compliant

SFH 2332



Wesentliche Merkmale

- Speziell geeignet für Anwendungen von 350nm bis 780nm
- Sehr kurze Schaltzeit im spezifizierten Wellenlängenbereich
- Sehr kurze Schaltzeiten bei geringer Sperrspannung (<5V)
- Extrem kurze Abklingzeit („slow tail“)
- 3 mm Plastikbauform im LED-Gehäuse

Anwendungen

- Optische Laufwerke (CD, DVD, BluRay)
- Lichtschranken für Gleich- und Wechselbetrieb
- Industrieelektronik
- „Messen/Steuern/Regeln“
- Abstandsmesser

Features

- Especially suitable for applications from 350nm to 780nm
- Fast switching time within the specified wavelength
- Fast switching time at low reverse voltage (<5V)
- Ultra short decay time („slow tail“)
- 3 mm LED plastic package

Applications

- Optical Disc Drives (CD, DVD, BluRay)
- Photointerrupters
- Industrial electronics
- For control and drive circuits
- Range Finder

Typ Type	Bestellnummer Ordering Code
SFH 2332	Q65110A6342

Grenzwerte
Maximum Ratings

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Betriebs- und Lagertemperatur Operating and storage temperature range	$T_{op}; T_{stg}$	- 40 ... + 100	°C
Sperrspannung Reverse voltage	V_R	15	V
Sperrspannung, $t < 120$ s Reverse voltage	V_R	20	V
Verlustleistung Total power dissipation	P_{tot}	150	mW
Elektrostatische Entladung Electrostatic Discharge Human Body Model according to EOS/ESD-5.1-1993	ESD	2	kV

Kennwerte ($T_A = 25$ °C)

Characteristics

Bezeichnung Parameter	Symbol Symbol	Wert Value			Einheit Unit
		min	typ	max	
Spektrale Fotoempfindlichkeit des Chips Spectral sensitivity of the chip $\lambda = 405\text{nm}$ $\lambda = 650\text{nm}$ $\lambda = 780\text{nm}$	S_λ		0.26 0.49 0.54		A/W
Fotostrom, $V_R = 5$ V, $E_e = 0.5$ mW/cm ² Photocurrent $\lambda = 405\text{nm}$ $\lambda = 650\text{nm}$ $\lambda = 780\text{nm}$	I_P		4.5 7.6 8.5		μA
Wellenlänge der max. Fotoempfindlichkeit Wavelength of max. sensitivity	$\lambda_{S\ max}$		780		nm
Spektraler Bereich der Fotoempfindlichkeit Spectral range of sensitivity, $S = 10\%$ of S_{max}	λ	350		1050	nm
Abmessung der bestrahlungsempfindlichen Fläche Dimensions of radiant sensitive area	$L \times B$ $L \times W$		0.6 × 0.6		mm × mm
Abstand Chipoberfläche zu Gehäuseoberfläche Distance chip front to case surface	H		2.4 ... 2.8		mm

Kennwerte ($T_A = 25\text{ °C}$)


Characteristics (cont'd)

Bezeichnung Parameter	Symbol Symbol	Wert Value			Einheit Unit
		min	typ	max	
Halbwinkel Half angle	φ		± 17		Grad deg.
Dunkelstrom, $V_R = 5V$ Dark current	I_R		0.05	5	nA
Anstiegs- und Abfallzeit des Fotostromes Rise and fall time of the photocurrent, 10% - 90% $V_R = 5V$; $R_L = 50\ \Omega$; $I_p = 1\text{ mA}$; $\lambda = 405\text{ nm}$ $\lambda = 650\text{ nm}$ $\lambda = 780\text{ nm}$;	t_r, t_f		1.5 1.6 1.8	5 5 5	ns
Kapazität, $f = 1\text{ MHz}$, $E = 0$, $V_R = 0\text{ V}$; Capacitance	C_0		4.5	5	pF
Temperaturkoeffizient von S_λ Temperature coefficient of S_λ $\lambda = 405\text{ nm}$ $\lambda = 650\text{ nm}$ $\lambda = 780\text{ nm}$	TC_1		-0.06 0.00 0.01		%/K %/K %/K
Rauschäquivalente Strahlungsleistung ¹⁾ Noise equivalent power, $\lambda = 650\text{ nm}$	NEP		8.2×10^{-15}		$\frac{W}{\sqrt{Hz}}$

$$^1) \text{ NEP} = 17,9 \times 10^{-15} \times \frac{\sqrt{I_R}}{S_\lambda}$$


Relative Spectral Sensitivity

$S_{rel} = f(\lambda)$

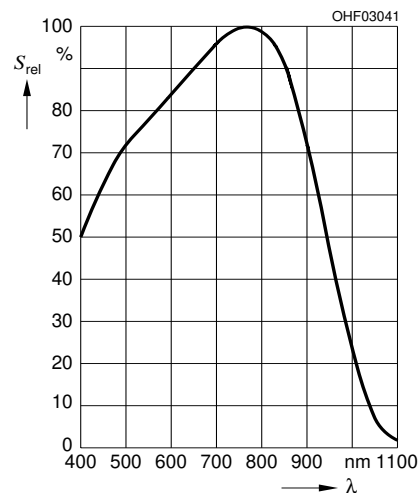


Capacitance

$C = f(V_R), E = 0$

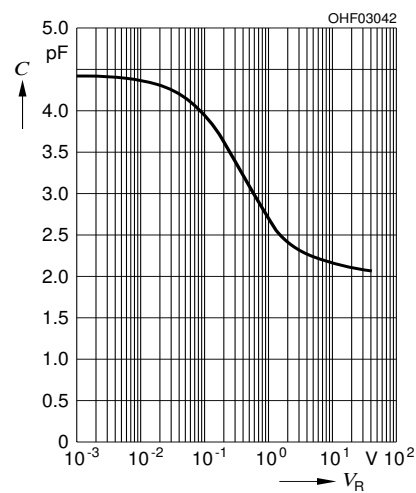


Switching Time

$t_r, t_f = f(V_R)$

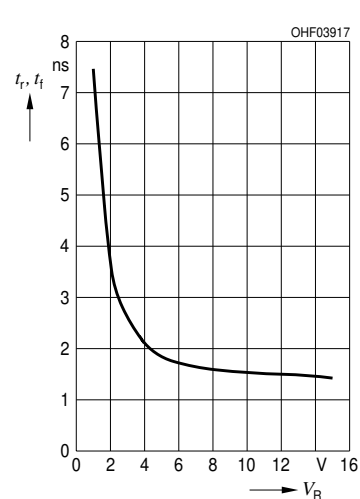


Dark Current

$I_R = f(V_R), E = 0$

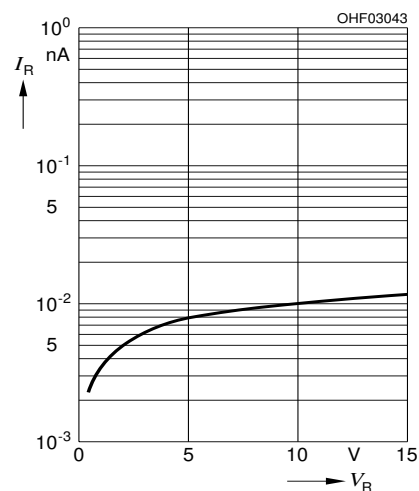


Total Power Dissipation

$P_{tot} = f(T_A)$

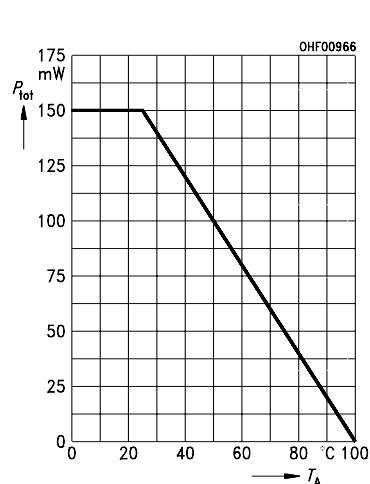


Directional Characteristics

$S_{rel} = f(\varphi)$

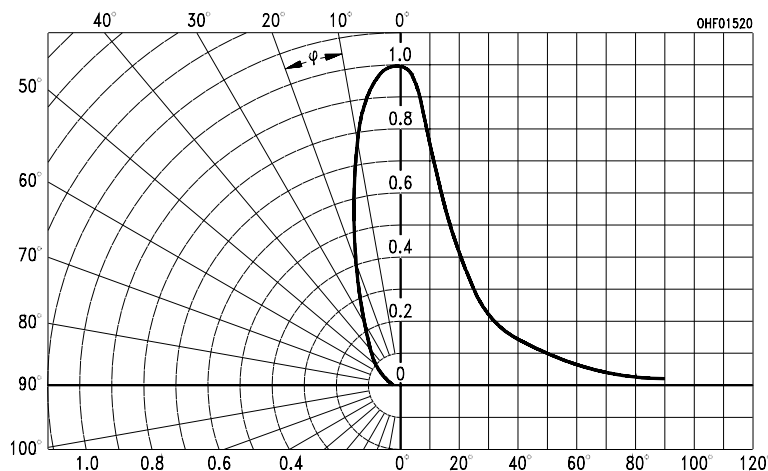


**Maßzeichnung
Package Outlines**

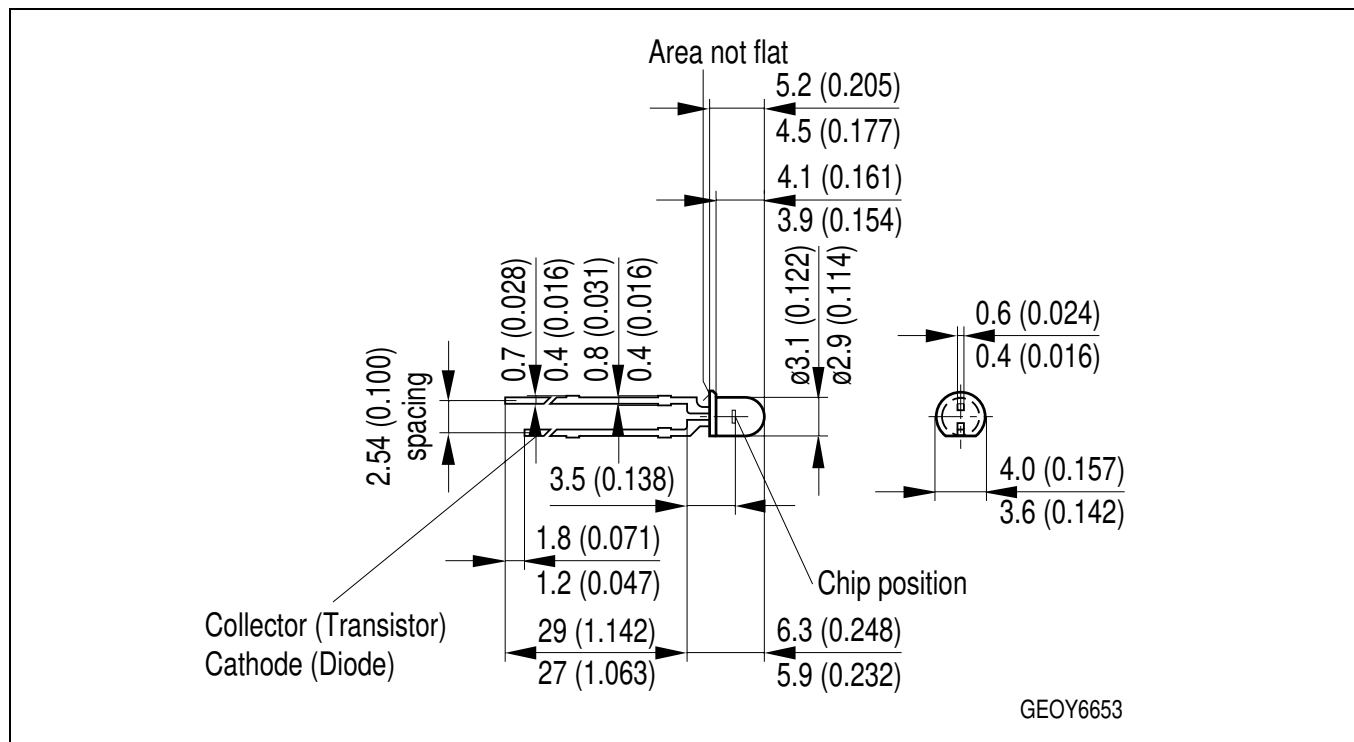

Maße in mm (inch) / Dimensions in mm (inch).

**Empfohlenes Lötpaddesign
Recommended Solder Pad**


Wellenlöten (TTW)
TTW Soldering

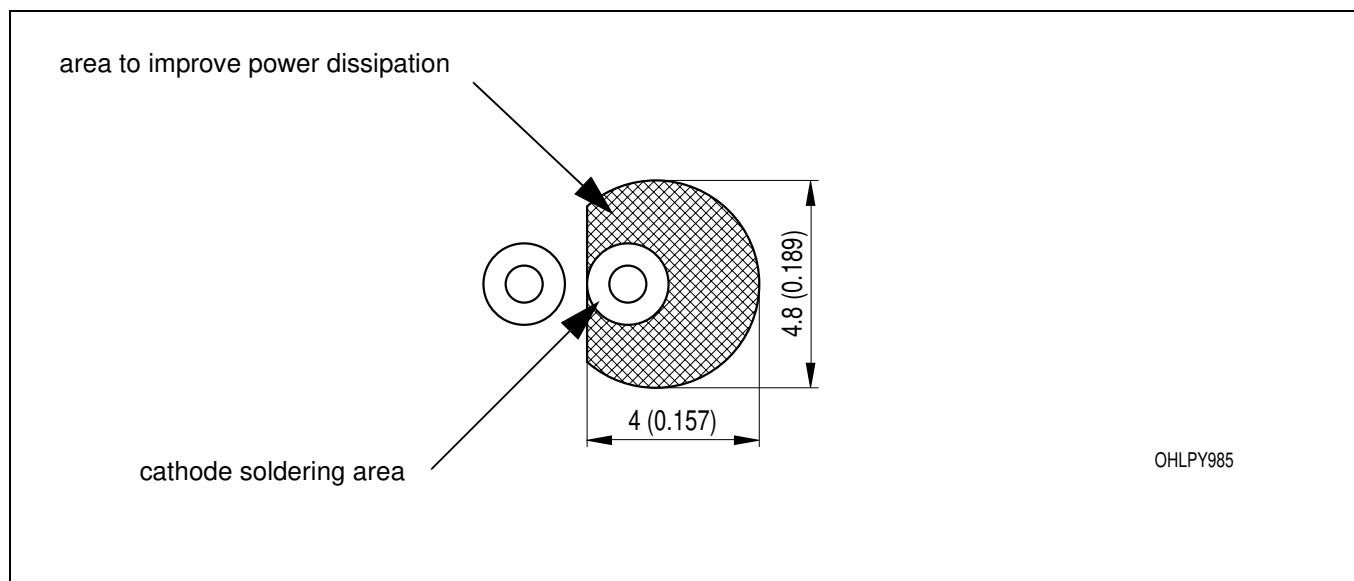

Maße in mm (inch) / Dimensions in mm (inch).

Lötbedingungen
Soldering Conditions
Wellenlöten TTW
TTW Soldering

(nach CECC 00802)
(acc. to CECC 00802)

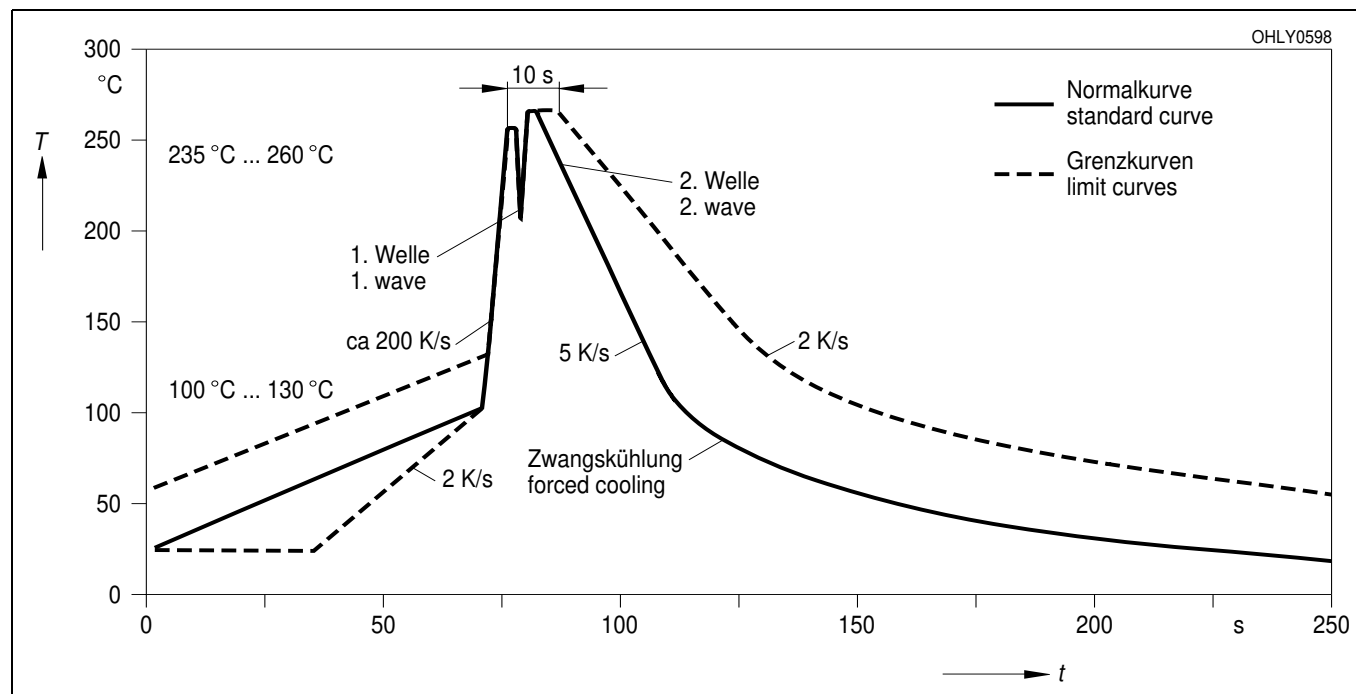

Published by
OSRAM Opto Semiconductors GmbH
Wernerwerkstrasse 2, D-93049 Regensburg
www.osram-os.com
© All Rights Reserved.

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；
按照中国的相关法规和标准，不含有毒有害物质或元素。

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components¹, may only be used in life-support devices or systems² with the express written approval of OSRAM OS.

¹ A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

² Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.