



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SIMB-M01

Intel® Atom™ D525 Mini-ITX with  
VGA/HDMI, 2 COM and LAN

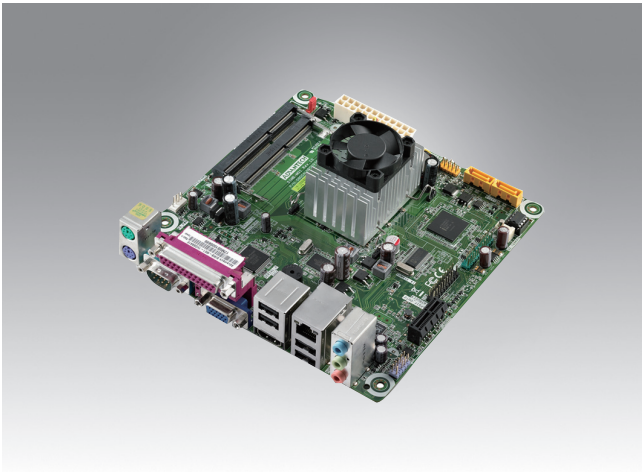

## Features

- Two chipset architecture
- Supports Intel® Atom™ dual core processor D525 platform
- Intel Graphics Media Accelerator 3150
- Supports VGA + HDMI dual display function
- Realtek RTL8111E supports Gigabit LAN
- Realtek ALC662 supports 5.1 channel HD audio
- 2 SATA II, 1 PCIe x1, 2 COM RS-232, 8 USB 2.0, 1 LPT, TPM header




CE FCC

## Specifications

Processor System	CPU	Intel Atom D525			
	Core Number	2			
	Max. Speed	1.8 GHz (dual core)			
	L2 Cache	1 MB			
	Chipset	Intel NM10			
	BIOS	AMI 32 Mbit, SPI			
	DMI	2.5GT/s			
Expansion Slot	PCIe x1	250 MB/s per direction, 1 slot			
Memory	Technology	Single channel DDR3 800 MHz SDRAM			
	Max. Capacity	4 GB			
	Socket	2 x 204 pin DDR3 SODIMM			
Graphics	Controller	Intel Graphics Media Accelerator 3150 integrated			
	VRAM	Shared system memory up to 224 MB SDRAM			
	VGA	1, supports up to SXGA 2048 x 1536 @ 60 Hz			
	HDMI	1, supports up to 1920 x 1080			
	Dual Display	VGA + HDMI			
Ethernet	Interface	10/100/1000 Mbps			
	Controller	Realtek RTL8111E			
	Connector	RJ-45 x 1			
SATA	Max Data Transfer Rate	SATA II 300 MB/s			
	Channel	2			
Rear I/O	VGA	1			
	HDMI	1			
	Ethernet	1			
	USB	4 (USB 2.0)			
	Audio	3 (Line-out, Line-in, Mic-in)			
	Parallel	1 (LPT)			
	Serial	1 (RS-232)			
	PS/2	2 (1 x keyboard and 1 x mouse)			
Internal Connectors	USB	4 (USB 2.0)			
	Serial	1 (RS-232)			
	IDE	-			
	SATA	2 (SATA II)			
	Parallel	-			
	GPIO	-			
Security	TPM	TPM Header			
Power Requirements	Power On	+12 V	+5 V	+3.3 V	5 Vsb
		0.54 A	2.23 A	0.71 A	0.34 A
Environment	Temperature	Operating		Non-Operating	
		0 ~ 50° C (32 ~ 122° F)		-20 ~ 70° C (-4 ~ 158° F)	
Physical Characteristics	Dimensions	170 x 170 mm (6.69" x 6.69")			

### Block Diagram

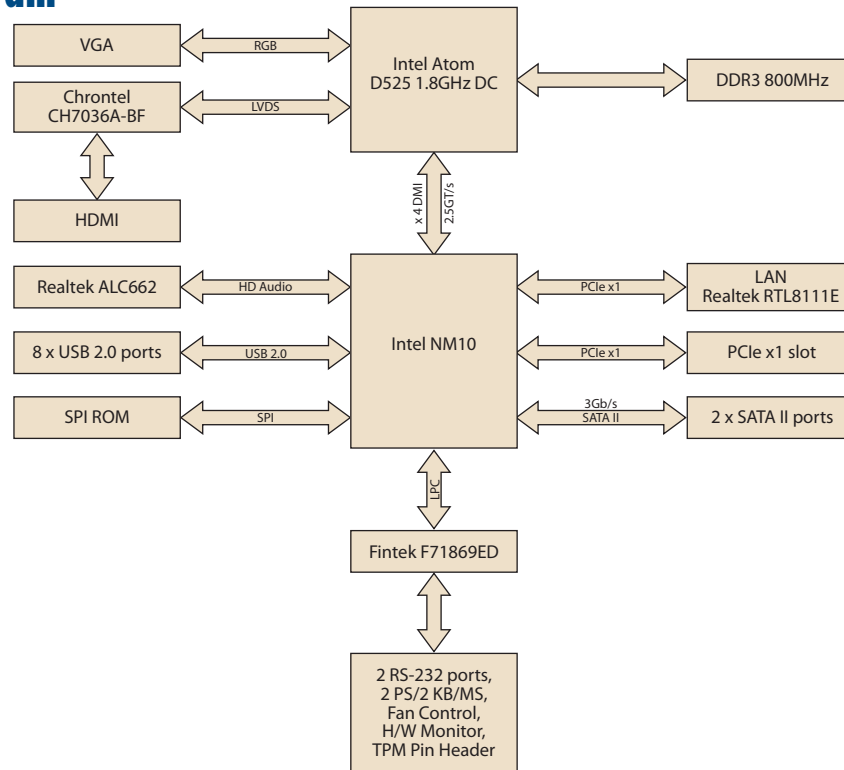

### Ordering Information

P/N	CPU	Chipset	VGA	GbE	USB	COM	SATA
SIMB-M01-1VGS8A1E	Intel Atom D525	Intel NM10	1	1	8 (4 Rear, 4 Internal)	2 RS-232 (1 Rear, 1 Internal)	2 SATA II

Note: Minimum order quantity is 10 pieces

### Packing List

Description	Quantity
SATA cable kit (SATA/POWER)	1
I/O shield	1
Startup manual	1 (per 10 units)
Driver CD	1 (per 10 units)

### Optional Accessories

Part Number	Description
1700003195	USB cable with two ports, 17.5 cm
1700002204	USB cable with two ports, 27 cm
1700008461	USB cable with two ports, 30.5 cm
1700019549	COM port cable with bracket, 40 cm
1700021716-01	COM port cable w/o bracket, 10 cm

### I/O View

