



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





PART NO.	HEAD SIZE "A"±.010	HEAD THICKNESS "B"	PRONG LENGTH "C"±.015	MOUNTING HOLE SIZE (SQUARE)	PANEL THICKNESS RANGE "T2"	SELF TAPPING SCREW SIZE	FIG NO.	HEAD STYLE NO.
SRSG6-04-01	.38 X .38 [9.7 X 9.7]	.04 [1]	.280 [7.1]	.245-.255 [6.22-6.48]	.031-.125 [0.79-3.18]	6	1	1
SRSG-1D	.490 [12.4] DIA.	.240-.260 [6.1-6.6]	.280 [7.1]	.281-.286 [7.14-7.26]	*.031-.109 [0.79-2.77]	8 or 10	2	2
SRSG-2D		.307-.317 [7.8-8.1]						
SRSG-3D		.360-.390 [9.1-9.9]						
SRSG-4D		.485-.515 [12.3-13.1]						
SRSG-5D		.610-.640 [15.5-16.3]						
SRSG-6D		.672-.702 [17.1-17.8]						
SRSG-7S	.405 X .405 [10.3 X 10.3]	.028-.038 [0.7-1]	.325 [8.3]	.275-.290 [6.99-7.37]	.031-.130 [0.79-3.3]	8 or 10	1	1
SRSG-8S		.057-.067 [1.4-1.7]						
SRSG-9D	.500 [12.7] DIA.	.093-.103 [2.4-2.6]	.325 [8.3]	.280-.295 [7.11-7.49]	.031-.156 [0.79-3.96]	8 or 10	1	2
SRSG-10D		.125-.135 [3.2-3.4]						
SRSG-11D		.360-.390 [9.1-9.9]						

HEAD STYLE 1

HEAD STYLE 2





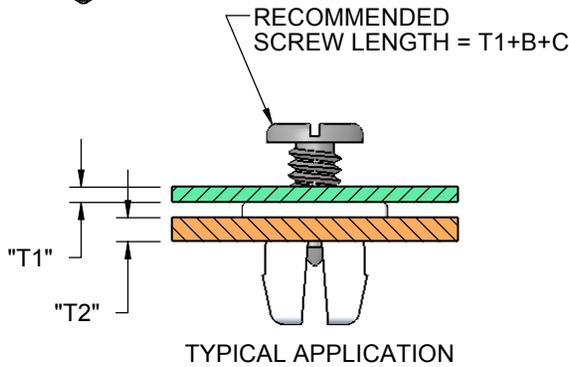


FIG 1

FIG 2

- NOTES:
1. MATERIAL: NYLON 6/6 UL 94 UL V-2 (RMS-01)
 2. COLOR: NATURAL.
 3. *PARTS AT MINIMUM PANEL THICKNESS (.031 [0.79]) WORK ONLY WITH #10 SCREW
 4. ALTERNATE UNITS FOR REFERENCE ONLY.

TITLE: SELF RETAINING SCREW GROMMET						DWG IN IN [MM]	
CREATED USING SOLIDWORKS	FILE #: SRSG	DWN: SK	APP: -	FINAL			
TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC.=±1/64 ANG.=±1°	SHEET: 1 OF 1	SHEET SIZE: A	DT: 09/22/05	CHKD: -	PART #		PRINT TYPE
RE: RICHCO, INC.	RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060		SEE TABLE		CA		

REV.	DESCRIPTION	ENGR.	DATE
C	SEE ECN #1318 FOR CHANGES	SK	04/19/07
B	SEE ECN # 1118	SK	06/05/06
A	CHANGED FILE NO. AND TITLE BLOCK	SM	05/16/01