



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AUDIO TRANSFORMERS SURFACE MOUNT PACKAGE



- RoHS peak reflow temperature rating 245°C
- Typical applications: telephone sets, PBXs, DLC systems, central office switches
- Optimized insertion loss and return loss for audio frequency range, including voiceband
- Designed for 600 Ω line impedance
- Small SMT footprint

Electrical Specifications @ 25°C


RoHS-Compliant Part Number	Turns Ratio Pri:Sec (±2%)	DCR Pri Side (Ω MAX)	DCR Sec Side (Ω MAX)	Isolation Voltage (V _{rms} MIN)	Insertion Loss (dB MAX)				Return Loss (dB MIN)		
					200 Hz	1 kHz	20 kHz	100 kHz	200 Hz	1 kHz	10 kHz
T6027NL	1:2	55	390	1500	1.2	1.0	1.0	1.7	18	18	18
T6003NL	1:1	55	70	1500	1.0	1.0	1.0	1.9	20	30	25

NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (ex: T6003NLT).


Mechanical

Schematic

T6003NL / T6027NL

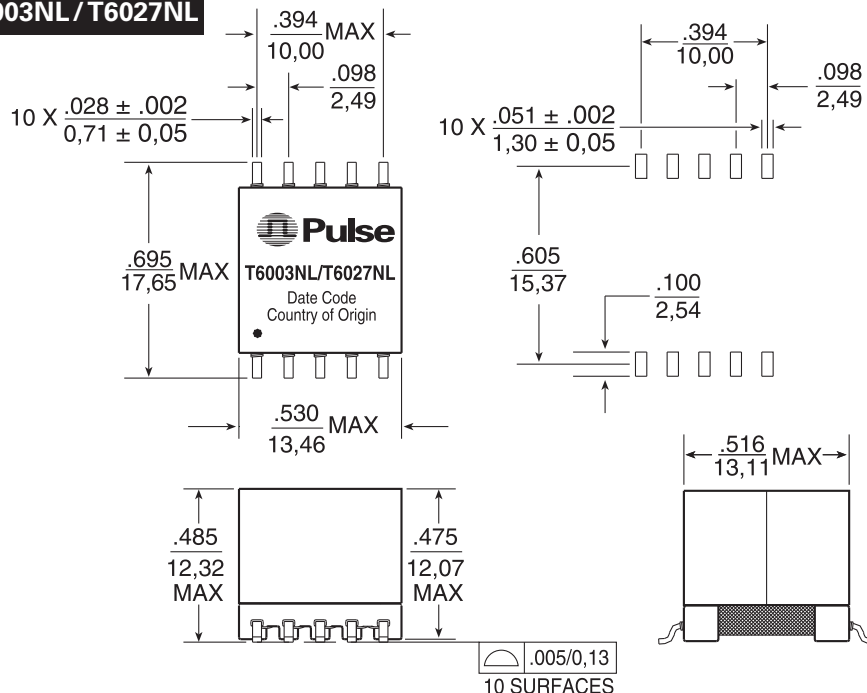

T6003NL: 600 Ω/600 Ω
T6027NL: 600 Ω/2400 Ω



Weight 6.7 grams
Pan Size 60/tray
Tape and Reel 150/reel

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
TEL: 86 755 33966678
FAX: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Pulse South Asia

135 Joo Seng Rd.
#03-02
PM Industrial Bldg.
Singapore 368363

Pulse North Asia

No. 26, Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan
R. O. C.

www.pulseeng.com

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 7032 7806 0
Fax: 49 7032 7806 135

Tel: 86 21 54643211/2
Fax: 86 21 54643210

TEL: 65 6287 8998
FAX: 65 6280 0080

Tel: 886 3 4643715
Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

T628.B (7/09)