

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Terminal Junction Splices



Terminal Junction Splices

Single/ Dual/ Diode M81714/11, /12,/24 Series I

Operating Range

Temperature:

-65°C to 200°C

Insulation Resistance:

5000 Megaohms Min.

Dielectric Withstanding Voltage:

1500 VRMS at Sea Level 200 VRMS at 100,000 ft.

Vibration & Shock:

Per AS-81714

Paragraph 3.5.5 & 3.5.8

Materials

Insulator Body:

Polyethermide per ASTM-D-5205

Grommet:

Silicone Rubber per A-A-59588

Internal Contact:

Copper Alloy, Gold Finish Accordance with MIL-G-45204

Product Description

Single and Dual Splices and Electronic Splices are designed to provide a quick and efficient solution to customer wiring requirements.

Single and Dual Wire Splices meet MIL-T-81714/11 &12 requirements and are highly resistant to temperature and fluids.

TJSE electronic modules can be supplied with a wide variety of diodes, resistors, capacitors, and fuses within the splice itself. TJSE electronic splices meet the electronic parameters of MIL-81714/24 and allow customers to incorporate system modifications into a wire bundle, avoiding changes in panels or boards.

Typical examples are represented to the right, but customer specific designs are welcomed, and an extensive list of existing splices are available on the next page.

Single Wire Splices

	Contacts			Part Num	ers	
	Military P/N	APCD P/N	Quantity	Size*	Part No.	
	M81714/11-22D	TJS322700	2	16/22	M39029/1-100	
	M81714/11-20D	TJS320700	2	16/20	M39029/1-101	
	M81714/11-12D	TJS316700	2	14/16	M39029/1-102	
	M81714/11-16D	TJS312700	2	12/12	M39029/1-103	


Dual Wire Splices

Bus	ssing	Part Nu	Contacts			Diameter		
T	ype	MIL P/N 81714	APCD P/N	Quantity	Size*	P/N M39029	Α	В
0	<u></u>	/12-22D-1	TJS322701	4	16/22	/1-100	.400	.275
	/12-20D-1	TJS320701	4	16/20	/1-101	.400	.275	
	/12-16D-1	TJS316701	4	14/16	/1-102	.500	.300	
000	/12-22D-2	TJS322702	4	16/22	/1-100	.400	.275	
	/12-20D-2	TJS320702	4	16/20	/1-101	.400	.275	
		/12-16D-2	TJS316702	4	14/16	/1-102	.500	.300

Electronic Splices

Circuit	Part Numbers	Diode		Contacts		
Type	APCD P/N	Diode P/N	Quantity	Size*	Quantity	P/N M39029
<u></u>	TJSE22707	JANTX1N5622	1	16/22	4	1-100
	TJSE20705	JANTX1N5622	1	16/20	4	1-101
(O)						
<u></u>	TJSE22709	JANTX1N5622	2	16/22	4	1-100
	TJSE20705	JANTX1N5622	2	16/20	4	1-101
$[\odot]$						

*Mating Pin Wire Barrrel

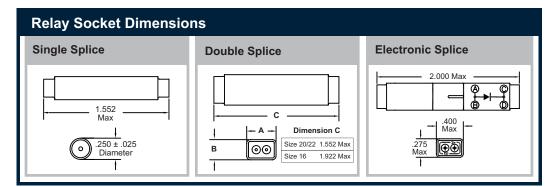

Amphenol Pcd

Electronic Terminal Junction Splices

MIL-T-81714/24 Compatible Class D

Terminal Junction Modules

Amphenol Pcd's Electronic Terminal Junction Splices are available with a variety of components and in a wide range of configurations. Components available include but are not limited to diodes, resistors, fuses, capacitors, thyristors, and inductors, and are also available with multiple components within one module. The following are currently available Electronic Terminal Junction Splices, although there are new configurations produced regularly and customized components are also available.



Amphenol Pcd Terminal Junction Splices

Circuit Diagram	APCD P/N	Part	Part P/N	Quantity
A.	TJSE20501	Inductor	1 100µH	1
, J. D				
(A)~	TJSE20503	Fuse	5 AMP 125V	1
B				
A	TJSE20505	Resistor	RW81 38Ω 1W	1
B				
A-W-©	TJSE20506	Resistor	120 Ω 1/4W	2
B-W-D				
A - B	TJSE20509	Diode	5 Amp	2
\bigcirc	TJSE20510	Diode	1 Amp 125V	1
B				
(A) (C)	TJSE20513	Capacitor	620pF	1
(A) (C)	TJSE20520	Capacitor	390pF	5
B D				
	TJSE20523	Resistor	15KΩ 1/4W	1
BWD				
A	TJSE20525	Resistor	10K Ω 1/4W	1
B				
	TJSE20526	Resistor	910 Ω 1/4W	1
(A)—W—(C)				
A_1/1	TJSE20553	Resistor	1KΩ 1/2W	1
A MB				
<u>A</u> -W-©	TJSE20554	Resistor	18KΩ 1/2W	2
B-W-D				
A_1/1	TJSE20555	Resistor	18KΩ 1/2W	1
A W B				

Circuit Diagram	APCD P/N	Part	Part P/N	Quantity
	TJSE20599	Diode	JANTX1N5554	1
B D				
A → C	TJSE20602	Diode	JANTX1N5618	2
B → D				
A → C	TJSE20703	Diode	1N5819	2
B → D				
0 0	TJSE20705	Diode	JANTX1N5622	1
(A) → (C)				
(A) → (C)	TJSE20706	Diode	JANTX1N5622	2
B → D				
A	TJSE20710	Diode	1N5622	1
B ▶ D				
<u>A</u> → ©	TJSE20711	Diode	1N4006	2
B → D				
(A)	TJSE22503	Fuse	5 AMP 125V	1
B				
	TJSE22514	Resistor	10K Ω,1/4 W	1
(A)—W/_D				
(A) (C)	TJSE22517	Resistor	120 Ω,1 W	1
B D				
<u>A</u> -W-©	TJSE22523	Resistor	75K Ω,1/2 W	2
B-W-D				
(A) → (C)	TJSE22707	Diode	JANTX1N5622	2
B → D				
(A) (C)	TJSE20599	Diode	1N5622	1
I → I B D				
<u>A</u> —W—©	TJSE20599	Resistor	78.7 Ω,1/4 W	2
B-W-D				