



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



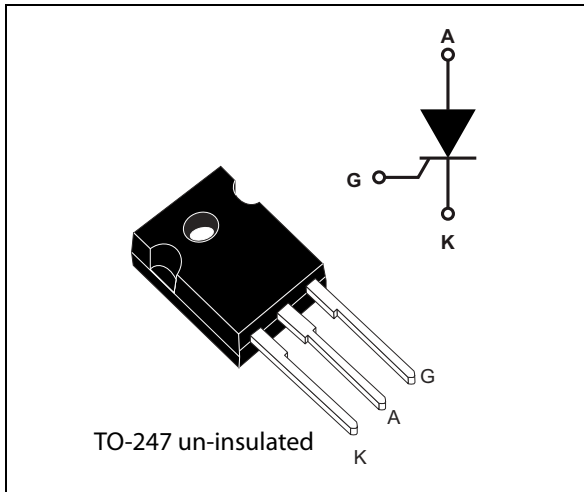

### Description

Available in TO-247 high power package, the TN5050H-12WY autograde is suitable in applications such as automotive / stationary battery charger, renewable energy generator, interruptible power supply, solid state relay, welding equipment and motor drive applications. Its power switching, voltage robustness and power dissipation performances are the key features for functions such as a 80 A AC switch, an AC phasing inverter and an AC-DC controlled rectifier bridge.

The TN5050H-12WY is an automotive grade product and offers a superior performance in surge current handling, thermal cooling capabilities and overvoltage robustness.

### Features

- On-state current: 50 A rms
- Blocking voltage: 1200 V
- High static and dynamic commutation:
  - $di/dt = 200 \text{ A}/\mu\text{s}$
  - $dV/dt = 1000 \text{ V}/\mu\text{s}$
- AEC-Q101
- $I_{GT} = 50 \text{ mA}$
- ECOPACK<sup>®</sup>2 compliant component

Table 1. Device summary

Symbol	Value	Unit
$I_{T(RMS)}$	50	A
$V_{DRM}, V_{RRM}$	1200	V
$V_{DSM}, V_{RSM}$	1300	V
$I_{GT}$	50	mA
$T_j$	150	°C

### Applications

- Automotive:
  - on board, off board battery charger
- Solar, wind renewable energy inverters
- Solid state relay
- UPS:
  - Bypass
  - ICL (inrush current limiter)
  - Battery charger
- Industrial welding systems
- Voltage control rectifier

# 1 Characteristics

**Table 2. Absolute ratings (limiting values,  $T_j = 25\text{ °C}$  unless otherwise stated)**

Symbol	Parameter		Value	Unit	
$V_{DRM}/V_{RMM}$	Repetitive off-state voltage (50-60 Hz)		$T_j = 150\text{ °C}$ 1200	V	
$I_{T(RMS)}$	On-state rms current (180° conduction angle)		$T_c = 137\text{ °C}$ 50	A	
$I_{T(AV)}$	Average on-state current (180° conduction angle)				
$I_{T(RMS)}$	On-state rms current (180° conduction angle)		$T_c = 125\text{ °C}$ 80	A	
$I_{T(AV)}$	Average on-state current (180° conduction angle)				
$I_{TSM}^{(1)}$	Non repetitive surge peak on-state current ( $T_j$ initial = 25 °C)		$t_p = 8.3\text{ ms}$	633	A
			$t_p = 10\text{ ms}$	580	
$di/dt$	Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$ , $t_r \leq 100\text{ ns}$	$F = 50\text{ Hz}$	$T_j = 150\text{ °C}$ 200	A/ $\mu\text{s}$	
$I_{GM}$	Forward peak gate current	$T_j = 150\text{ °C}$	$t_p = 20\text{ }\mu\text{s}$ 8	A	
$P_{G(AV)}$	Average gate power dissipation		$T_j = 150\text{ °C}$ 1	W	
$T_{stg}$	Storage junction temperature range			- 40 to + 150 °C	
$T_j$	Operating junction temperature range			- 40 to + 150 °C	

1. ST recommends  $I^2t$  value for fusing = 1680 A<sup>2</sup>s for  $T_j = 25\text{ °C}$  and  $T_p = 10\text{ ms}$ .


**Table 3. Electrical characteristics ( $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified)**

Symbol	Test conditions	Value	Unit
$I_{GT}$	$V_D = 12\text{ V}, R_L = 33\ \Omega$	Min.	10
		Max.	50
$V_{GT}$	$V_D = 12\text{ V}, R_L = 33\ \Omega$	Max.	1 V
$V_{GD}$	$V_D = 2/3 \times V_{DRM}, R_L = 3.3\text{ k}\Omega$	$T_j = 150\text{ }^\circ\text{C}$ Min.	0.15 V
$I_H$	$I_T = 500\text{ mA}$ , gate open	Max.	100 mA
$I_L$	$I_G = 1.2 \times I_{GT}$	Max.	125 mA
$t_{gt}$	$I_T = 50\text{ A}, V_D = V_{DRM}, I_G = 200\text{ mA}, dI_G/dt = 0.2\text{ A}/\mu\text{s}$	Typ	3 $\mu\text{s}$
$dV/dt$	$V_D = 2/3 \times V_{DRM}$ , gate open	$T_j = 150\text{ }^\circ\text{C}$ Min.	1000 $\text{V}/\mu\text{s}$
$t_q$	$I_T = 33\text{ A}, V_D = 800\text{ V}, V_R = 75\text{ V}, t_p = 100\ \mu\text{s}, dI_T/dt = 10\text{ A}/\mu\text{s}, dV_D/dt = 20\text{ V}/\mu\text{s}$	$T_j = 150\text{ }^\circ\text{C}$ Typ	150 $\mu\text{s}$
$V_{TM}$	$I_{TM} = 100\text{ A}, t_p = 380\ \mu\text{s}$	Max.	1.55 V
$V_{TO}$	Threshold voltage	$T_j = 150\text{ }^\circ\text{C}$ Max.	0.88 V
$R_D$	Dynamic resistance	$T_j = 150\text{ }^\circ\text{C}$ Max.	6 $\text{m}\Omega$
$I_{DRM}/I_{RRM}$	$V_D = V_{DRM}, V_R = V_{RRM}$	$T_j = 25\text{ }^\circ\text{C}$ Max.	5 $\mu\text{A}$
		$T_j = 125\text{ }^\circ\text{C}$ Max.	3 mA
		$T_j = 150\text{ }^\circ\text{C}$ Max.	7.5 mA
$I_{DSM}/I_{RSM}$	$V_D = V_{DSM}, V_R = V_{RSM}$	$T_j = 25\text{ }^\circ\text{C}$ Max.	10 $\mu\text{A}$

**Table 4. Thermal resistance**

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case (DC)	TO-247	0.3 $^\circ\text{C}/\text{W}$
$R_{th(j-a)}$	Junction to ambient		50 $^\circ\text{C}/\text{W}$

**Figure 1. Maximum average power dissipation versus average on-state current**

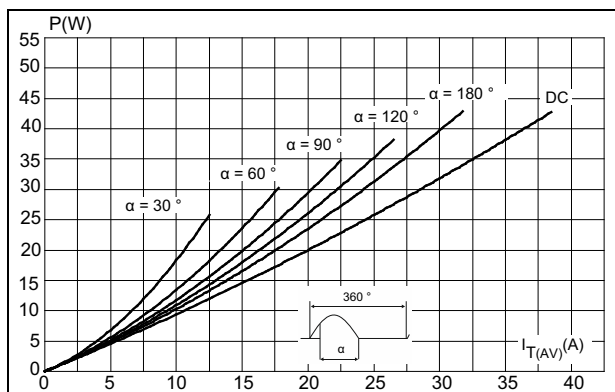

**Figure 2. Correlation between maximum average power dissipation and maximum allowable temperatures ( $T_{amb}$  and  $T_{case}$ )**

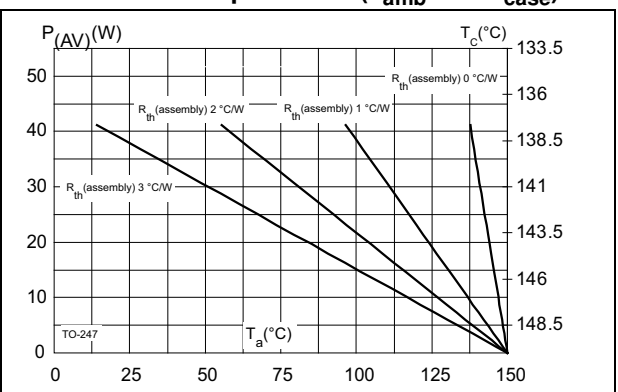




Figure 3. Average and D.C. on-state current versus case temperature

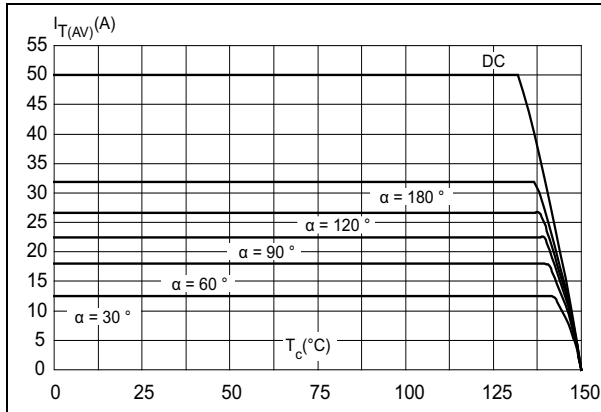


Figure 4. Average and D.C. on-state current versus ambient temperature

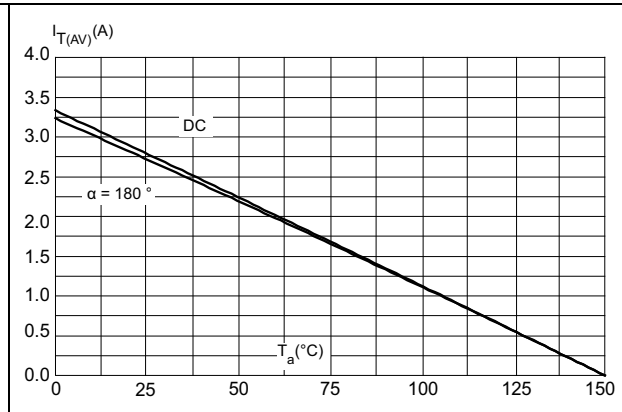


Figure 5. Relative variation of thermal impedance junction to case and junction to ambient versus pulse duration

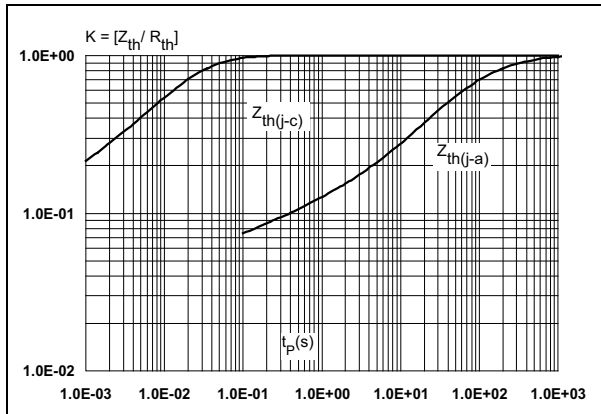


Figure 6. Relative variation of gate trigger current and gate voltage versus junction temperature (typical values)

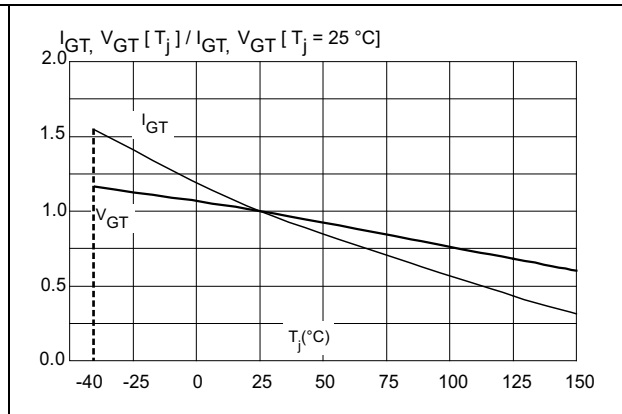


Figure 7. Relative variation of holding and latching current versus junction temperature (typical values)

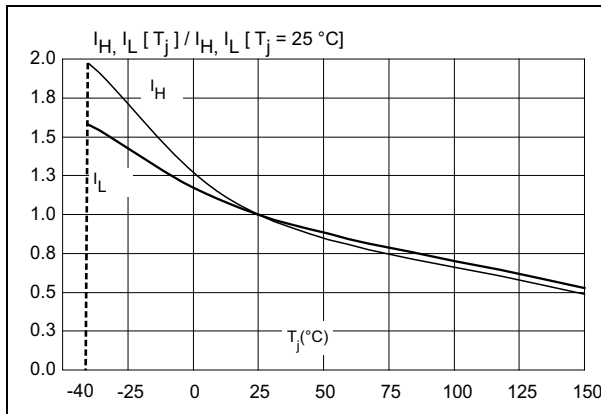


Figure 8. Surge peak on-state current versus number of cycles

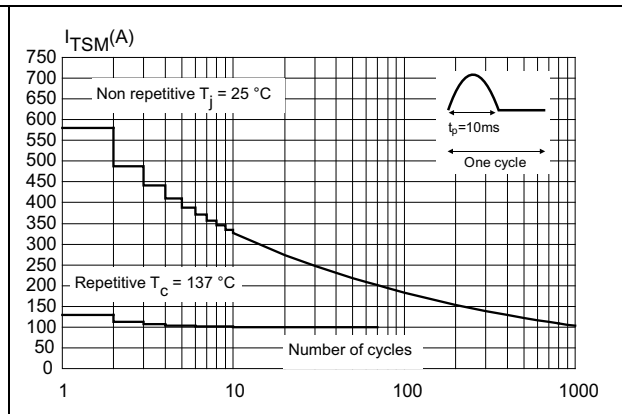


Figure 9. Non repetitive surge peak on-state current for a sinusoidal pulse ( $t_p < 10$  ms)

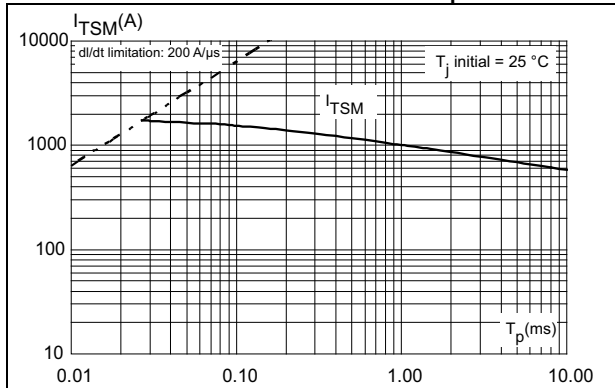


Figure 10. On-state characteristics (maximum values)


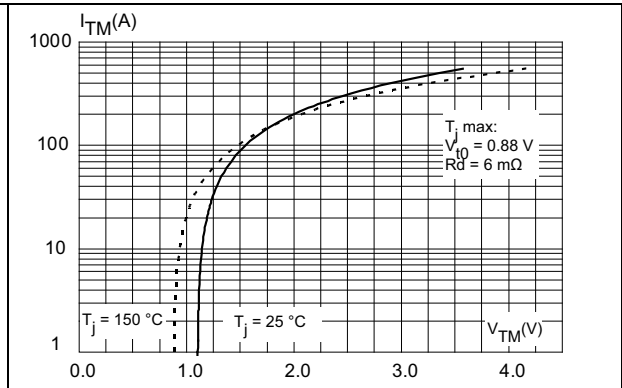


Figure 11. Relative variation of leakage current versus junction temperature for different values of blocking voltage (typical values)

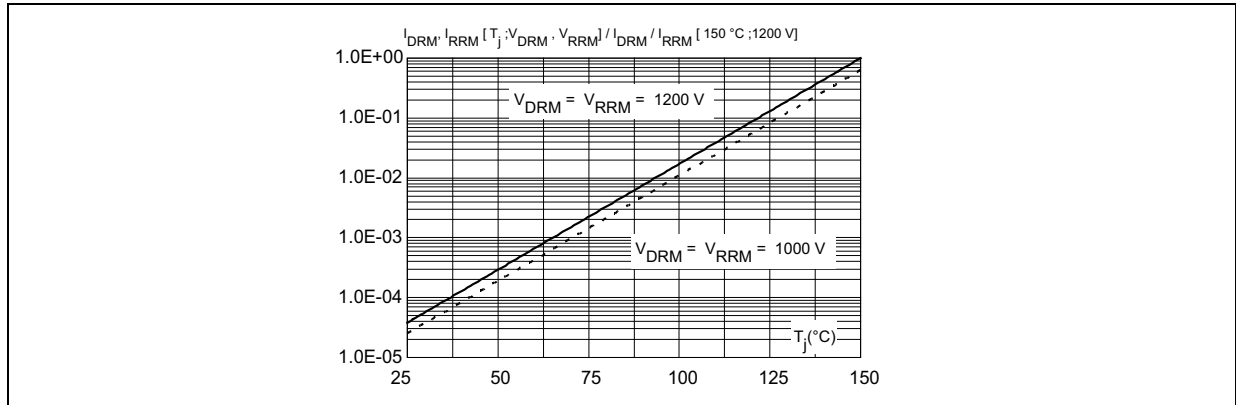

## 2 Package information

- Epoxy meets UL94, V0
- Lead-free package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

Figure 12. TO-247 dimension definitions

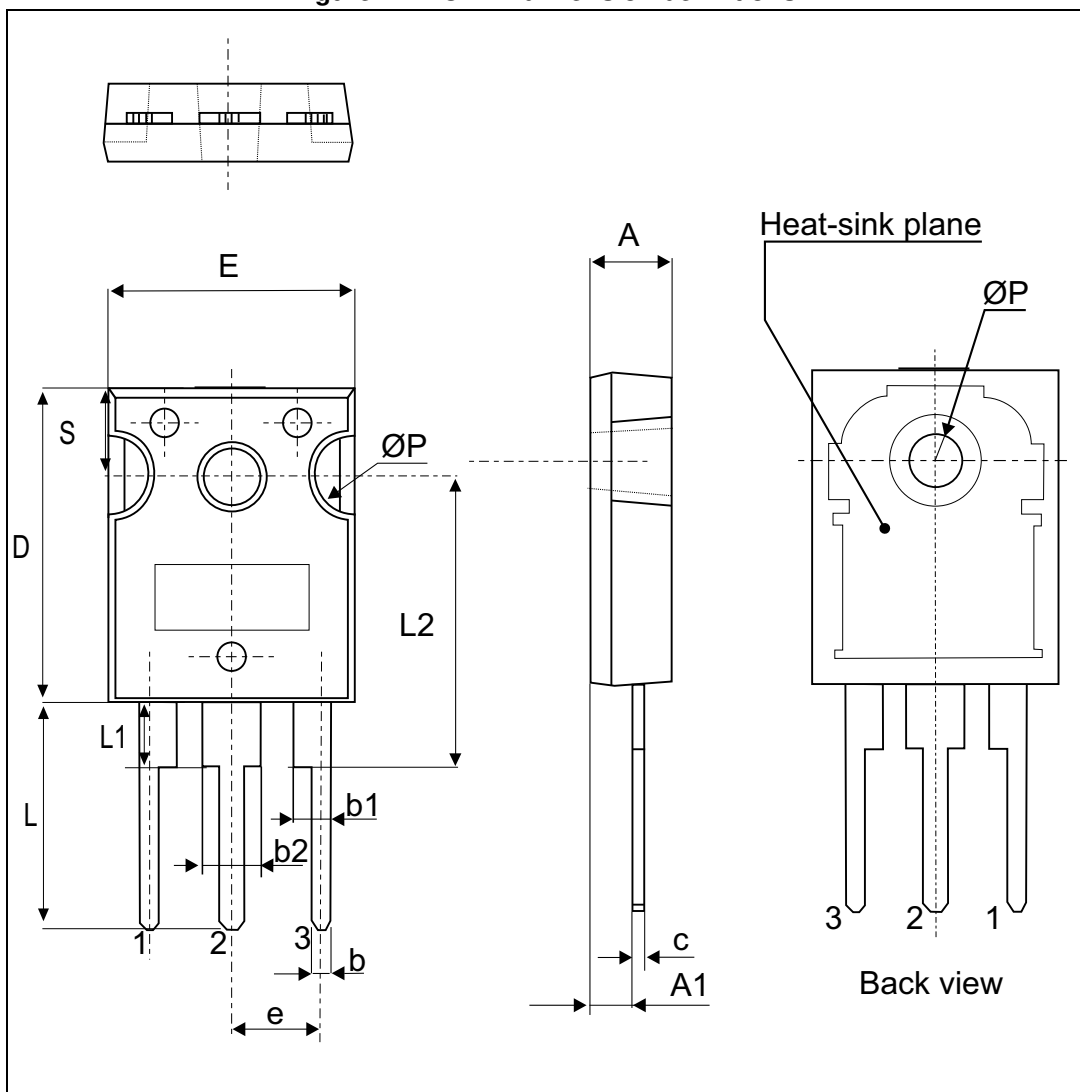


Table 5. TO-247 dimension values

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ	Max.
A	4.85		5.15	0.191		0.203
A1	2.20		2.60	0.086		0.102
b	1.00		1.40	0.039		0.055
b1	2.00		2.40	0.078		0.094
b2	3.00		3.40	0.118		0.133
c	0.40		0.80	0.015		0.031
D <sup>(1)</sup>	19.85		20.15	0.781		0.793
E	15.45		15.75	0.608		0.620
e	5.30	5.45	5.60	0.209	0.215	0.220
L	14.20		14.80	0.559		0.582
L1	3.70		4.30	0.145		0.169
L2	18.50 typ.			0.728 typ.		
∅P <sup>(2)</sup>	3.55		3.65	0.139		0.143
∅R	4.50		5.50	0.177		0.217
S	5.30	5.50	5.70	0.209	0.216	0.224

1. Dimension D plus gate protrusion does not exceed 20.5 mm
2. Resin thickness around the mounting hole is not less than 0.9 mm



### 3 Ordering information

Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
TN5050H-12WY	TN5050H12Y	TO-247	4.43 g	30	Tube

### 4 Revision history

Table 7. Document revision history

Date	Revision	Changes
07-Jan-2015	1	Initial release.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved