



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




HDSL transformer designed for use with Brooktree HDSL IC chips BT8921/BT8970 at 1168kbps rates

MODEL NUMBER
TTC-4020


- A. Electrical Specifications (@ 25°C)
1. Primary (Line side) Impedance; 135Ω
 2. Secondary (IC side) Impedance; 32Ω
 3. Longitudinal Balance; 50dBm MIN @ 40KHz TO 300KHz, 0dBm (Per ITU method pin 7 grounded)
 4. Frequency Response; ±0.1dB @ 33KHz to 110KHz, 0dBm
 5. Insertion Loss; 0.5dB MAX @ 40KHz, 0dBm
 6. Total Harmonic Distortion; -70dB MAX @ 20KHz, 4.5Vp-p
 7. Return Loss; 16.5dB MIN @ 40KHz to 300KHz, 0dBm
 8. Primary Open Circuit Inductance; 2.0mH ±6% @ 10KHz, 0.1Vrms Measured (1-5) with 2 and 4 shorted
 9. Leakage Inductance; 11μH MAX @ 100KHz, 0.1Vrms Measured (1-5) with 2 & 4, and 7 & 9 shorted
 10. DC Current; 160mA
 11. DC Resistance; (1-4)+(2-5)=2.50Ω MAX
(7-9)=1.00Ω MAX
 12. Turns Ratio; (1-4):(2-5)=1:1.00±2%
(7-9):(1-5)=1:2.00±2%
2 & 4 shorted
 13. Dielectric Strength; 1875Vrms 1 second @ Pri to Sec

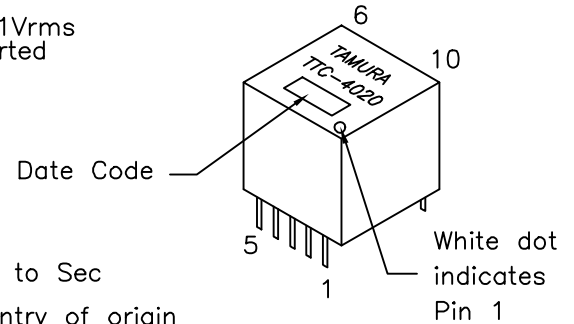

- B. Marking; TTC-4020, TAMURA, date code and country of origin
C. Safety; Complies with UL1950 3rd Edition and IEC950
D. Schematic;

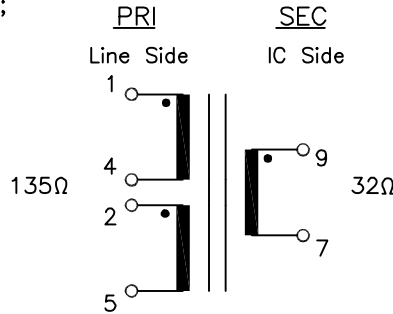

E. Mechanical Specifications;

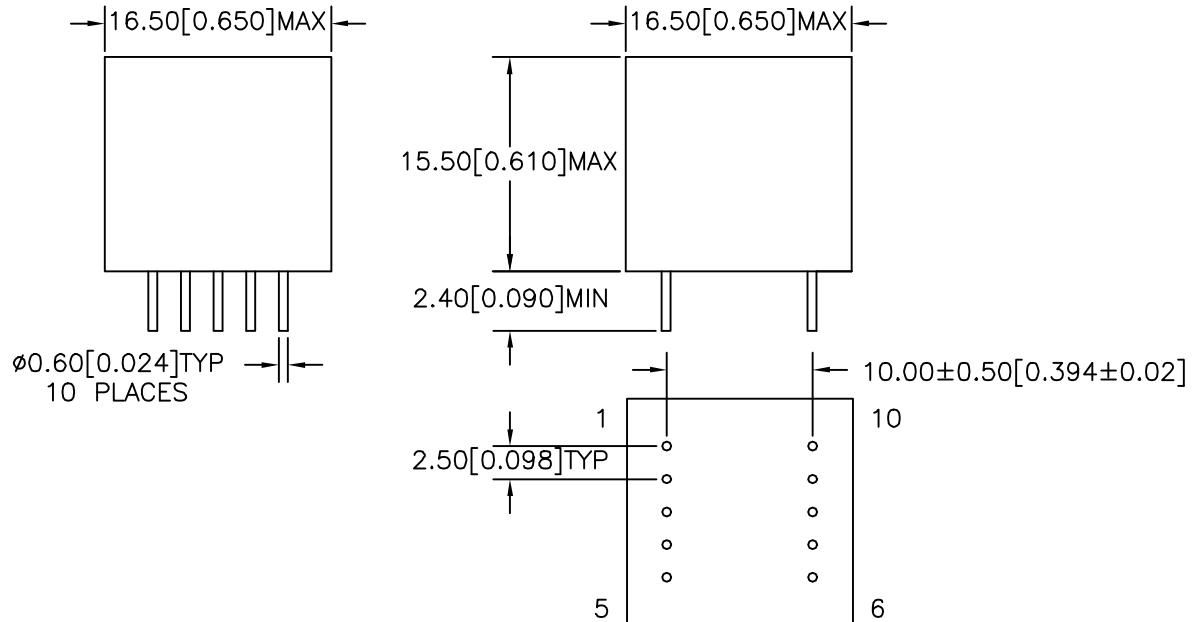

PREPARED BY:

D. Rund

ENGINEER:

M. Pitchai

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

DWG CONTROL NO.
P-A1-12348
ACAD\TTC\A1123481.DWG

REV
PRE

HDSL
TRANSFORMER

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

TTC-4020

MODEL SPECIFICATION

DIM: mm(in) SCL: 2/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.