



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV. Status

PRELIMINARY
01/12/00 MP

PRELIMINARY 1
CHANGED ISO
DRAWING, E &
DESCRIPTION
02/14/00 MP

HDSL transformer designed for use with Brooktree HDSL IC chips BT8921/BT8970 chipsets, at 784kpbs rates


A. Electrical Specifications (@ 25° C)

1. Primary (Line side) Impedance; 135Ω
2. Secondary (IC side) Impedance; 32Ω
3. Frequency Response; ±0.1dB @ 40KHz to 200KHz, 0dBm
4. Insertion Loss; 0.4dB MAX @ 200KHz, 0dBm
5. Longitudinal Balance; 53dB MIN @ 40KHz to 200KHz, 0dBm (Pin 9 grounded)
6. Total Harmonic Distortion; -70dB MAX @ 40KHz, 14dBm
7. Return loss; 20dB MIN @ 40K to 200KHz, 0dBm
8. Primary Open Circuit Inductance; 3.0mH ±6% @ 10KHz, 1.0Vrms Measured (1-5) with 4 and 2 shorted
9. Leakage Inductance; 11μH MAX @ 100KHz, 0.1Vrms Measured (1-5) with 4 & 2 and 9 & 7 shorted
10. DC Current; 160mA
11. DC Resistance; (1-4)+(2-5)=2.5Ω MAX (9-7)=1.0Ω MAX
12. Turns Ratio; (1-4):(2-5)=1:1.00±2% (9-7):(1-5)=1:2.00±2% 4 & 2 shorted
13. Dielectric Strength; 1875Vrms 1 second @ Pri to Sec



B. Marking; TTC-4028, TAMURA, date code and country of origin

C. Safety: Complies with UL1950 3rd Edition and IEC950

D. Schematic

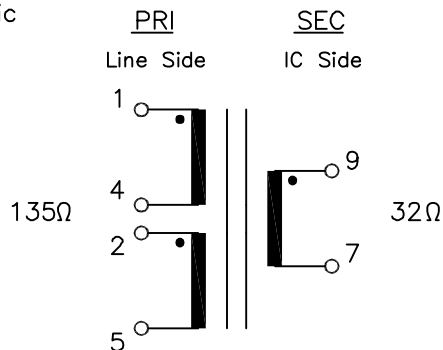

E. Mechanical Specifications

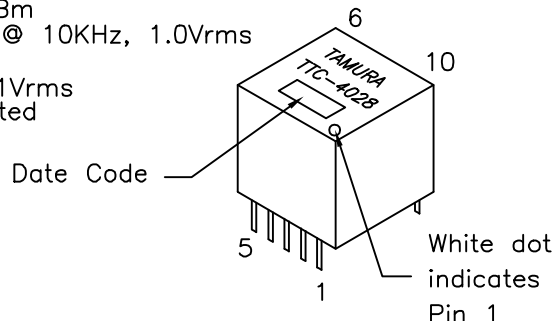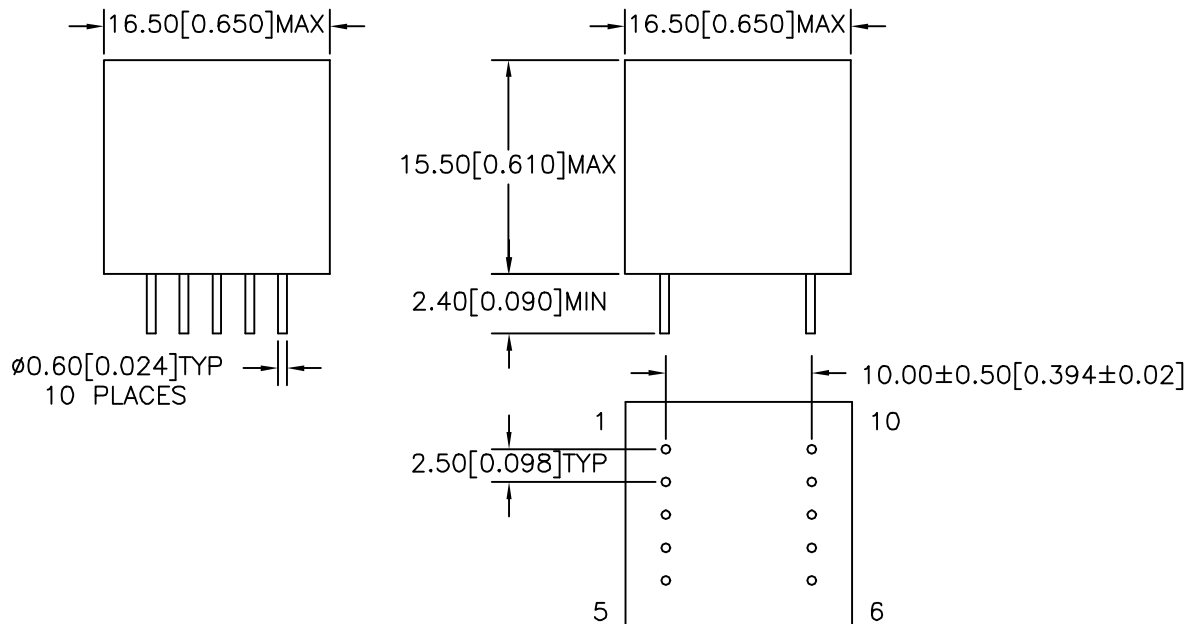

MODEL NUMBER

TTC-4028

PREPARED BY:

D. Rund

ENGINEER:

M. Pitchai

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

DWG CONTROL NO.
P-A1-12297
ACAD\TTC\A1122971.DWG

REV
PR1

HDSL
TRANSFORMER

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

TTC-4028

MODEL SPECIFICATION

DIM: mm(in) SCL: 2/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.