



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Economical And Easy To Install
- Cuts Easily With Scissors
- Reflects Radiant Heat
- Insulates Delicate Wires And Components
- Resists Gasoline And Engine Chemicals

### Put-Ups

Nominal Size	Part #	Wall Thickness ±0.006"	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
3/8"	TTN0.38SV	0.025"	300'	100'	Silver	1.86
1/2"	TTN0.50SV	0.025"	250'	100'	Silver	2.55
5/8"	TTN0.63SV	0.025"	250'	100'	Silver	3.00
3/4"	TTN0.75SV	0.025"	250'	100'	Silver	3.45
7/8"	TTN0.88SV	0.025"	250'	100'	Silver	4.10
1"	TTN1.00SV	0.025"	250'	100'	Silver	4.50
1 1/4"	TTN1.25SV	0.025"	250'	100'	Silver	5.40
1 1/2"	TTN1.50SV	0.025"	250'	100'	Silver	6.20
1 3/4"	TTN1.75SV	0.025"	100'	50'	Silver	7.40
2"	TTN2.00SV	0.025"	100'	50'	Silver	8.70
2 1/2"	TTN2.50SV	0.025"	100'	50'	Silver	10.10
3"	TTN3.00SV	0.025"	100'	50'	Silver	19.00




Cut Cleanly  
Scissor

## Reflective Aluminized Surface Bonded to Insulating Fiberglass

THERMASHIELD creates a buffer between your wires, hoses and cables and the high temperature environments they are required to perform in. ThermaShield is engineered by laminating an aluminum heat shield to a layer of strong fiberglass insulation. This system provides superior protection from radiant heat by reflecting it away from sensitive electronics, wiring and hoses.

THERMASHIELD TUBE (TTN) is designed to easily slip over wires or hoses. The seamless construction provides full coverage and protection, and the flexible sleeving cuts easily with scissors.

■ Colors Available:  
Silver (SV)

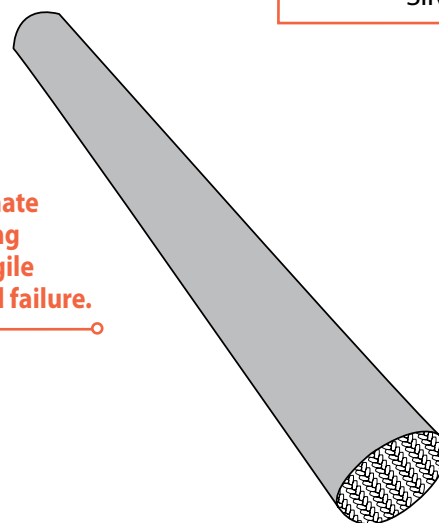

When applied, the aluminum laminate reflects heat away and the insulating fiberglass backing protects the fragile contents from thermal damage and failure.

#### Material

Aluminum Laminated Fiberglass

#### Grade

TTN

#### Wall Thickness

.025"

#### Drawing Number

TF001TT-WD




www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409  
104 Demarest Road • Sparta, NJ 07871

HALOGEN  
FREE FAR-25





**ABRASION** **FLAMMABILITY**

**Abrasion Resistance**  
Very High

Rating \_\_\_\_\_ Non Combustible  
Will not burn

**Abrasion Test Machine**  
Taber 5150

**Abrasion Test Wheel**  
Calibrase H-18

**Abrasion Test Load**  
500g

**Room Temperature**  
73°F

**Humidity**  
55%

**Foil Layer Worn Through**  
1,000 Test Cycle

**Fiberglass Layer Worn Through - Material Destroyed**  
1,200 Test Cycles

**Pre-Test Weight**  
10,925.0 mg

**Post-Test Weight**  
9,607.6 mg

**Test End Loss Of Mass Point Of Destruction**  
1,317.4 mg

**CHEMICAL RESISTANCE**


1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents \_\_\_\_\_ 1  
Aliphatic Solvents \_\_\_\_\_ 1  
Chlorinated Solvents \_\_\_\_\_ 1  
Weak Bases \_\_\_\_\_ 1  
Salts \_\_\_\_\_ 1  
Strong Bases \_\_\_\_\_ 1  
Salt Water 0-S-1926 \_\_\_\_\_ 1  
Hydraulic Fluid MIL-H-5606 \_\_\_\_\_ 1  
Lube Oil MIL-L-7808 \_\_\_\_\_ 1  
De-Icing Fluid MIL-A-8243 \_\_\_\_\_ 1  
Strong Acids \_\_\_\_\_ 2  
Strong Oxidants \_\_\_\_\_ 2  
Esters/Ketones \_\_\_\_\_ 1  
UV Light \_\_\_\_\_ 1  
Petroleum \_\_\_\_\_ 1  
Fungus ASTM G-21 \_\_\_\_\_ 1  
Halogen Free \_\_\_\_\_ Yes  
RoHS \_\_\_\_\_ Yes

**Melt Point**  
ASTM D-2117  
2,048°F (1,120°C)

**Maximum Continuous**  
Mil-I-23053  
491°F (255°C)

**Minimum Continuous**  
-76°F (-60°C)

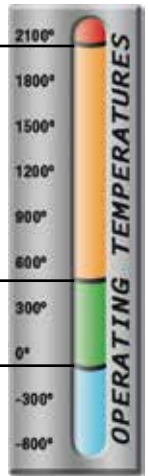

**PHYSICAL PROPERTIES**

Flammability Rating \_ Non Combustible  
Recommended Cutting \_\_\_\_\_ Scissor  
Colors \_\_\_\_\_ 1  
Wall Thickness \_\_\_\_\_ .025