

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Quick Start Guide


### TWR-VF65GS10

For Vybrid Controller Solutions Based on ARM® Cortex®-A5 and Cortex-M4 Processors with the DS-5 Toolchain



TOWER SYSTEM


# Get to know the TWR-VF65GS10

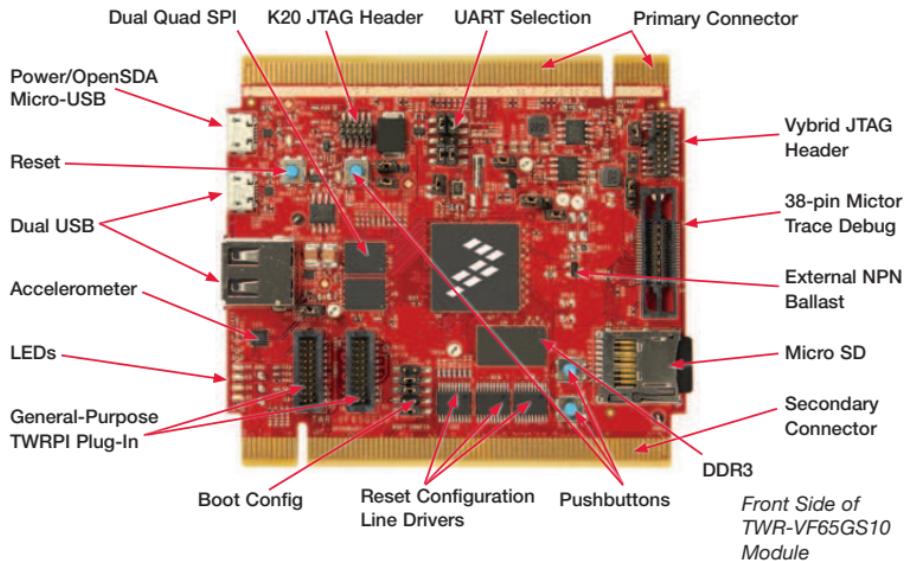

## TWR-VF65GS10 Freescale Tower System

The TWR-VF65GS10 module is a part of the Freescale Tower System, a modular development platform that enables rapid prototyping and tool re-use through reconfigurable hardware. Elevate your design to the next level and begin constructing your Tower System today.

Get to Know the TWR-VF65GS10

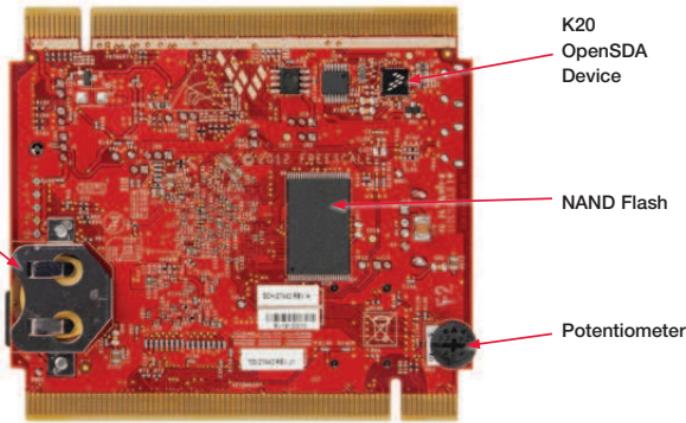

*Back Side of  
TWR-VF65GS10  
Module*



## TWR-VI 65GS10 Features

- Vybrid MVF61NS151CMK50 controller (dual-core Cortex-A5 at 500 MHz + Cortex-M4 at 167 MHz, 1.5 MB SRAM, dual Ethernet, dual USB, advanced security)
- Kinetis K20DX128VFM5 MCU-based OpenSDA circuit
- 1 Gb x 16 (128 MB) DDR3 in 96 FBGA package
- 2 Gb x 16 (256 MB) NAND flash
- Two 128 MB (16 MB) quad I/O serial flash
- Dual USB with on-chip PHY
- Interfaces to TWR-LCD-RGB graphical LCD module
- Four user-controlled status LEDs
- Three mechanical push buttons for user input and one for reset
- Potentiometer and three-axis digital accelerometer
- Micro SD card slot
- Independent battery-operated power supply for real-time clock and tamper detection module

# Step-by-Step Installation Instructions

This Quick Start Guide details how to set up the TWR-VF65GS10 module and run some demo projects on the device.

**1**

## Download Software and Tools

Download installation software and documentation under **“Jump Start Your Design”** at [freescale.com/TWR-VF65GS10](http://freescale.com/TWR-VF65GS10).

**2**

## Configure the Hardware

- Assemble your Tower System development platform per the instructions found in the TWR-ELEV module package, unless the board will be used standalone.
- Insert the dual-headed USB-A side of the provided USB cable into the PC and insert the micro-B end into the OpenSDA USB port (J3) on the TWR-VF65GS10 module. Allow the PC to automatically configure the USB drivers if needed.

# Step-by-Step Installation Instructions

## 3 Locate and Install CDC Device Drivers

- The module will enumerate as a composite “Mass Storage and Serial CDC Device.” The drivers for the CDC functionality can be found on the enumerated drive (for example: F:\TWR-VF65GS).
- Go to that drive to find the CDC drivers and install them.

## 4 Set up Serial Communication

- A USB-to-serial bridge is supported through the USB CDC functionality. The serial port number is viewable in the Device Manager (right click, My Computer>Properties>Device Manager>Port Settings). This allows for serial communication between the Tower module and a terminal program running on the PC via the USB connection.
- Setup a terminal program to use this COM port with the following settings: 115200 baud, eight data bits, no parity, one stop bit. Alternatively, you may use the TWR-SER or TWR-SER2 serial module for serial communication. See the “Introduction to the Vybrid Tower System Module” video clip at [freescale.com/TWR-VF65GS10](http://freescale.com/TWR-VF65GS10) for more details.

## 5 Tilt the Board

- After the TWR-VF65GS10 module powers up, the U-Boot bootloader will load the out-of-box demo from the SD card. The Cortex-A5 core runs the Linux® operating system and uses the Open SDA USB-to-serial bridge. The Cortex-M4 core runs the Freescale MQX™ RTOS and uses the TWR-SER or TWR-SER2 serial module for serial communication. Both operating systems operate independently of each other on their respective cores, but can communicate via software APIs and shared memory.
- Tilt the module to see different LEDs light up—the accelerometer data is being read by MQX on the M4 core and transferred to Linux on the A5 core. You will also see Linux output on the OpenSDA serial connection set up in Step 3.

## 6 Explore the Features

- Follow the “Introduction to the Vybrid Tower System Module” video clip at [freescale.com/TWR-VF65GS10](http://freescale.com/TWR-VF65GS10) to further explore the features and capabilities of the out-of-box demo.

## 7 Start Debugging

- To start debugging with DS-5, the OpenSDA firmware needs to be updated with the CMSIS-DAP application. For more detail, please refer to the “Jump Start Your Design” documentation located at [freescale.com/TWR-VF65GS10](http://freescale.com/TWR-VF65GS10)

# TWR-VF65GS10 Jumper Options

The following is a list of all jumper options on the TWR-VF65GS10. The default settings are shown in bold.

Jumper	Option	Setting	Description
J1	Vybrid VBAT power source - SecureRTC, 32 kHz XOSC, Tamper, and Monitors	1-2	VBAT tied to main Vybrid 3.3 V (VCC_3V3 MCU)
		2-3	VBAT tied to Coin Cell
J4	VCC_3V3 MCU - main Vybrid 3.3 V supply (VDD33 pins)	ON	P3V3 from on-board 3.3 V regulator tied directly to VCC_3V3 MCU
		OFF	Current-measuring device installed instead of jumper
J6	JTAG 5 V supply	OFF	Pin 11 & 13 of JTAG connector floating
		ON	Pin 11 & 13 of JTAG connector tied to 5 V
J7	Tamper loopback	ON	EXT_WM0_TAMPER_IN tied to EXT_WM0_TAMPER_OUT
		OFF	EXT_WM0_TAMPER_IN open; EXT_WM0_TAMPER_OUT open
J13	Accelerometer interrupt	ON	MCU PTB9 pin tied to INT1 of accelerometer
		OFF	Accelerometer Interrupt input untied
J18	3.3 V from Vybrid board to Tower system (applicable only when Elevator not powered with 5 V)	ON	P3V3 tied to P3V3_ELEV
		OFF	Board and Tower System 3.3 V power rails untied

(previous page)

Jumper	Option	Setting	Description															
J19	Onboard 5 V source	1-2	P5V comes from USB Micro-B connector J3 <b>(only option when "OpenSDA" operates)</b>															
		2-3	P5V comes from Peripheral USB OTG Micro-B J8															
J20	Power source for Vybrid USB0 PHY	1-2	Self-powered - USB0_VBUS tied to P5V															
		2-3	Bus-powered - USB0_VBUS tied to VBUS of Peripheral USB OTG Micro-B J8															
J21	Power source for Vybrid USB1 PHY	ON	<b>USB1_VBUS tied to VBUS of Host USB Type-A J12</b>															
		OFF	USB1 PHY unpowered															
J22 Pins 1 to 10	Boot configuration <b>ON/INSTALLED-1,</b> OFF-0  <table border="1"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr><tr><td>2</td><td>4</td><td>6</td><td>8</td><td>10</td></tr><tr><td>1</td><td>3</td><td>5</td><td>7</td><td>9</td></tr></table>	1	2	3	4	5	2	4	6	8	10	1	3	5	7	9	12_345	<a href="#">Switch Settings Detail</a>
1	2	3	4	5														
2	4	6	8	10														
1	3	5	7	9														
10_000	QuadSPI Boot																	
10_110	<b>SD Card Boot</b>																	
10_001	NAND Boot																	
01_xxx	UART/USB Boot																	
00_xxx	Boot From Fuses																	
1-2	SCI1_TX connected to ELEV_UART1_TX																	
1-3	<b>SCI1_TX connected to OpenSDA_UART_RX</b>																	
2-4	<b>SCI2_TX connected to ELEV_UART1_TX</b>																	
3-4	SCI2_TX connected to OpenSDA_UART_RX																	
J23	SCI1_TX and SCI2_TX select	1-2	SCI1_TX connected to ELEV_UART1_TX															
		1-3	<b>SCI1_TX connected to OpenSDA_UART_RX</b>															
		2-4	<b>SCI2_TX connected to ELEV_UART1_TX</b>															
		3-4	SCI2_TX connected to OpenSDA_UART_RX															

# I VRK-VR65GS10 Jumper Settings

(continued from previous page)

Jumper	Option	Setting	Description
J23 <i>continued</i>	SCI1_RX and SCI2_RX select	7-8	SCI1_RX connected to ELEV_UART1_RX
		7-9	<b>SCI1_RX connected to OpenSDA_UART_TX</b>
		8-10	<b>SCI2_RX connected to ELEV_UART1_RX</b>
		9-10	SCI2_RX connected to OpenSDA_UART_TX
J25	Elevator 5 V supply	ON	P5V tied to P5V_ELEV
		OFF	Board and Tower System 5 V power rails untied
R164, R165	USB0 multiplexer selection	A	Connected to Peripheral USB OTG Micro-B connector J8
		B	Connected to Tower System elevator
R21	Optional Ethernet MII interface	A	<b>RMII CLK</b>
		B	MII0 TXCLK
R175 to R181	Optional Ethernet MII interface	None	<b>RMII Interfaces used</b>
		0-Ohm	MII0 Interface used
R182	Optional Ethernet MII interface	A	<b>SAI RX BCLK</b>
		B	MII0 RXCLK
SH10	Vybrid SDRAM controller power	Shorted	<b>Power pins tied directly to onboard 1.5 V source</b>
		Cut	Current measuring device connected across





Visit [freescale.com/TWR-VF65GS10](http://freescale.com/TWR-VF65GS10) for information on the TWR-VF65GS10, including:

- TWR-VF65GS10 user manual
- TWR-VF65GS10 “Introduction to the Vybrid Tower System Module” video clip
- TWR-VF65GS10 schematics
- Vybrid family fact sheets
- Tower System fact sheet

## Support

Visit [freescale.com/support](http://freescale.com/support) for a list of phone numbers within your region.

## Warranty

One (1) year limited warranty. Please visit us at [freescale.com/warranty](http://freescale.com/warranty) for complete warranty information.

For more information, visit [freescale.com/Tower](http://freescale.com/Tower) or [freescale.com/Vybrid](http://freescale.com/Vybrid)

Join the online Tower community at [towergeeks.org](http://towergeeks.org)

Freescale, the Freescale logo and Kinetis are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. Vybrid and Tower are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. ARM and Cortex are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. © 2013, 2014 Freescale Semiconductor, Inc.

