



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

N-Channel JFETs

J308	SST308	U309
J309	SST309	U310
J310	SST310	

PRODUCT SUMMARY					
Part Number	$V_{GS(off)}$ (V)	$V_{(BR)GSS}$ Min (V)	g_{fs} Min (mS)	I_{DSS} Min (mA)	
J308	-1 to -6.5	-25	8	12	
J309	-1 to -4	-25	10	12	
J310	-2 to -6.5	-25	8	24	
SST308	-1 to -6.5	-25	8	12	
SST309	-1 to -4	-25	10	12	
SST310	-2 to -6.5	-25	8	24	
U309	-1 to -4	-25	10	12	
U310	-2.5 to -6	-25	10	24	

FEATURES

- Excellent High Frequency Gain: Gps 11.5 dB @ 450 MHz
- Very Low Noise: 2.7 dB @ 450 MHz
- Very Low Distortion
- High ac/dc Switch Off-Isolation

BENEFITS

- Wideband High Gain
- Very High System Sensitivity
- High Quality of Amplification
- High-Speed Switching Capability
- High Low-Level Signal Amplification

APPLICATIONS

- High-Frequency Amplifier/Mixer
- Oscillator
- Sample-and-Hold
- Very Low Capacitance Switches

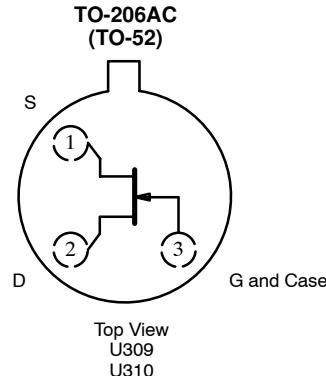
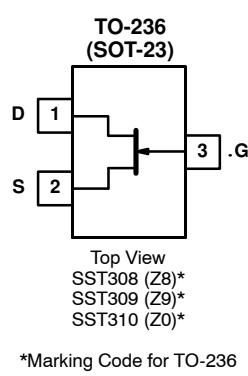
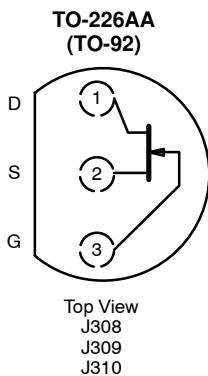
DESCRIPTION

The J/SST/U308 series offers superb amplification characteristics. Of special interest is its high-frequency performance. Even at 450 MHz, this series offers high power gain at low noise.

Low-cost J series TO-226AA (TO-92) packaging supports automated assembly with tape-and-reel options. The SST series TO-236 (SOT-23) package provides surface-mount capabilities

and is available with tape-and-reel options. The U series hermetically-sealed TO-206AC (TO-52) package supports full military processing. (See Military and Packaging Information for further details.)

For similar dual products packaged in the TO-78, see the U430/431 data sheet.



For applications information see AN104.

ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage	-25 V	Operating Junction Temperature	-55 to 150°C
Gate Current : (J/SST Prefixes)	10 mA	Power Dissipation : (J/SST Prefixes) ^a	350 mW
(U Prefix)	20 mA	(U Prefix) ^b	500 mW
Lead Temperature ($1/16"$ from case for 10 sec.)	300°C		
Storage Temperature : (J/SST Prefixes)	-55 to 150°C		
(U Prefix)	-65 to 175°C		

Notes

- a. Derate 2.8 mW/°C above 25°C
- b. Derate 4 mW/°C above 25°C

SPECIFICATIONS FOR J/SST308, J/SST309 AND J/SST310 ($T_A = 25^\circ\text{C}$ UNLESS NOTED)

Parameter	Symbol	Test Conditions	Typ ^a	Limits						Unit
				J/SST308		J/SST309		J/SST310		
Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
Static										
Gate-Source Breakdown Voltage	$V_{(\text{BR})\text{GSS}}$	$I_G = -1 \mu\text{A}$, $V_{DS} = 0 \text{ V}$	-35	-25		-25		-25		V
Gate-Source Cutoff Voltage	$V_{GS(\text{off})}$	$V_{DS} = 10 \text{ V}$, $I_D = 1 \text{ nA}$		-1	-6.5	-1	-4	-2	-6.5	V
Saturation Drain Current ^b	I_{DSS}	$V_{DS} = 10 \text{ V}$, $V_{GS} = 0 \text{ V}$		12	60	12	30	24	60	mA
Gate Reverse Current	I_{GSS}	$V_{GS} = -15 \text{ V}$, $V_{DS} = 0 \text{ V}$	-0.002		-1		-1		-1	nA
		$T_A = 125^\circ\text{C}$	-0.001		-1		-1		-1	μA
Gate Operating Current	I_G	$V_{DG} = 9 \text{ V}$, $I_D = 10 \text{ mA}$	-15							pA
Drain-Source On-Resistance	$r_{DS(\text{on})}$	$V_{GS} = 0 \text{ V}$, $I_D = 1 \text{ mA}$	35							Ω
Gate-Source Forward Voltage	$V_{GS(F)}$	$I_G = 10 \text{ mA}$ $V_{DS} = 0 \text{ V}$	J	0.7		1		1		V
Dynamic										
Common-Source Forward Transconductance	g_{fs}	$V_{DS} = 10 \text{ V}$, $I_D = 10 \text{ mA}$ $f = 1 \text{ kHz}$	14	8		10		8		ms
Common-Source Output Conductance	g_{os}		110		250		250		250	μS
Common-Source Input Capacitance	C_{iss}	$V_{DS} = 10 \text{ V}$ $V_{GS} = -10 \text{ V}$ $f = 1 \text{ MHz}$	J	4	5	5		5		pF
Common-Source Reverse Transfer Capacitance	C_{rss}		SST	4						
			J	1.9	2.5	2.5		2.5		
			SST	1.9						
Equivalent Input Noise Voltage	\bar{e}_n	$V_{DS} = 10 \text{ V}$, $I_D = 10 \text{ mA}$ $f = 100 \text{ Hz}$	6							$\text{nV}/\sqrt{\text{Hz}}$
High Frequency										
Common-Gate Forward Transconductance	g_{fg}	$V_{DS} = 10 \text{ V}$ $I_D = 10 \text{ mA}$	$f = 105 \text{ MHz}$	14						ms
Common-Gate Output Conductance	g_{og}		$f = 450 \text{ MHz}$	13						
Common-Gate Power Gain ^c	G_{pg}		$f = 105 \text{ MHz}$	0.16						
Noise Figure	NF		$f = 450 \text{ MHz}$	0.55						
			$f = 105 \text{ MHz}$	16						dB
			$f = 450 \text{ MHz}$	11.5						
			$f = 105 \text{ MHz}$	1.5						
			$f = 450 \text{ MHz}$	2.7						

Notes

- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- b. Pulse test: $PW \leq 300 \mu\text{s}$ duty cycle $\leq 3\%$.
- c. Gain (G_{pg}) measured at optimum input noise match.

N2B

**SPECIFICATIONS FOR U309 AND U310 ($T_A = 25^\circ\text{C}$ UNLESS NOTED)**

Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit	
				U309		U310			
				Min	Max	Min	Max		
Static									
Gate-Source Breakdown Voltage	$V_{(\text{BR})\text{GSS}}$	$I_G = -1 \mu\text{A}, V_{DS} = 0 \text{ V}$	-35	-25		-25		V	
Gate-Source Cutoff Voltage	$V_{GS(\text{off})}$	$V_{DS} = 10 \text{ V}, I_D = 1 \text{ nA}$		-1	-4	-2.5	-6	V	
Saturation Drain Current ^b	I_{DSS}	$V_{DS} = 10 \text{ V}, V_{GS} = 0 \text{ V}$		12	30	24	60	mA	
Gate Reverse Current	I_{GSS}	$V_{GS} = -15 \text{ V}, V_{DS} = 0 \text{ V}$ $T_A = 125^\circ\text{C}$	-0.002 -0.001		-0.15		-0.15	nA μA	
Gate Operating Current	I_G	$V_{DG} = 9 \text{ V}, I_D = 10 \text{ mA}$	-15					pA	
Drain-Source On-Resistance	$r_{DS(\text{on})}$	$V_{GS} = 0 \text{ V}, I_D = 1 \text{ mA}$	35					Ω	
Gate-Source Forward Voltage	$V_{GS(F)}$	$I_G = 10 \text{ mA}, V_{DS} = 0 \text{ V}$	0.7		1		1	V	
Dynamic									
Common-Source Forward Transconductance	g_{fs}	$V_{DS} = 10 \text{ V}, I_D = 10 \text{ mA}$ $f = 1 \text{ kHz}$	14	10		10		mS	
Common-Source Output Conductance	g_{os}		110		250		250	μS	
Common-Source Input Capacitance	C_{iss}	$V_{DS} = 10 \text{ V}, V_{GS} = -10 \text{ V}$ $f = 1 \text{ MHz}$	4		5		5	pF	
Common-Source Reverse Transfer Capacitance	C_{rss}		1.9		2.5		2.5		
Equivalent Input Noise Voltage	\bar{e}_n	$V_{DS} = 10 \text{ V}, I_D = 10 \text{ mA}$ $f = 100 \text{ Hz}$	6					$\text{nV}/\sqrt{\text{Hz}}$	
High Frequency									
Common-Gate Forward Transconductance	g_{fg}	$V_{DS} = 10 \text{ V}$ $I_D = 10 \text{ mA}$	$f = 105 \text{ MHz}$	14				mS	
Common-Gate Output Conductance	g_{og}		$f = 450 \text{ MHz}$	13					
Common-Gate Power Gain ^{c, d}	G_{pg}		$f = 105 \text{ MHz}$	0.16					
Noise Figure ^d	NF		$f = 450 \text{ MHz}$	0.55					
Notes			$f = 105 \text{ MHz}$	16	14		14	dB	
			$f = 450 \text{ MHz}$	11.5	10		10		
			$f = 105 \text{ MHz}$	1.5		2			
			$f = 450 \text{ MHz}$	2.7		3.5	3.5		

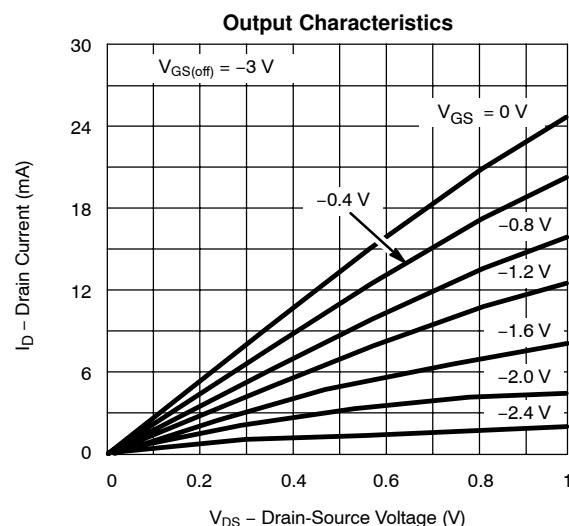
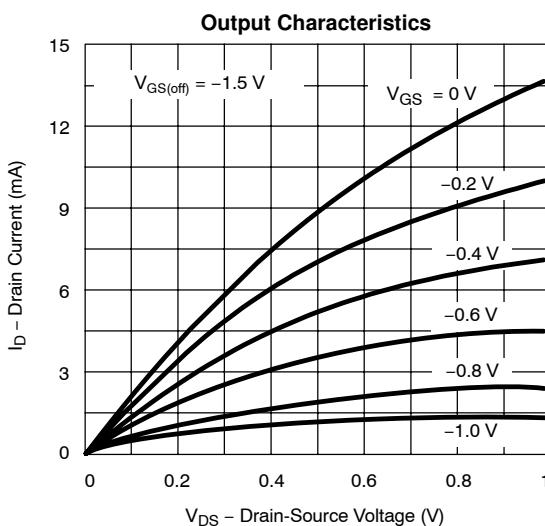
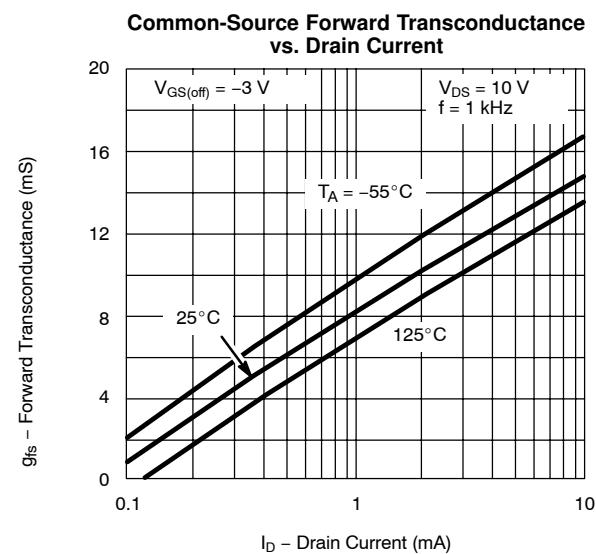
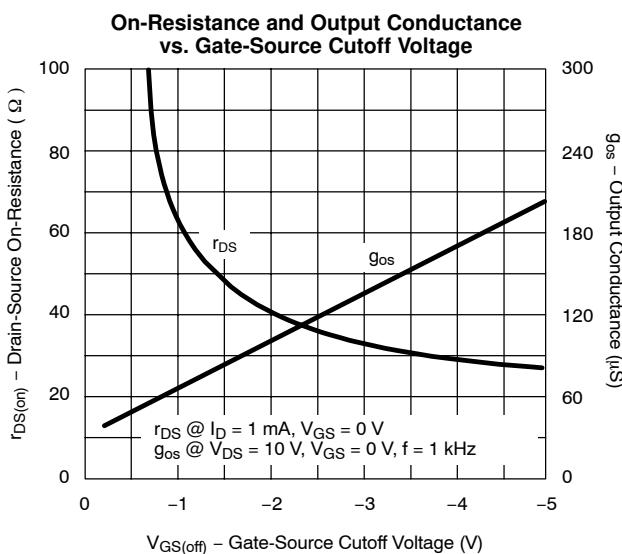
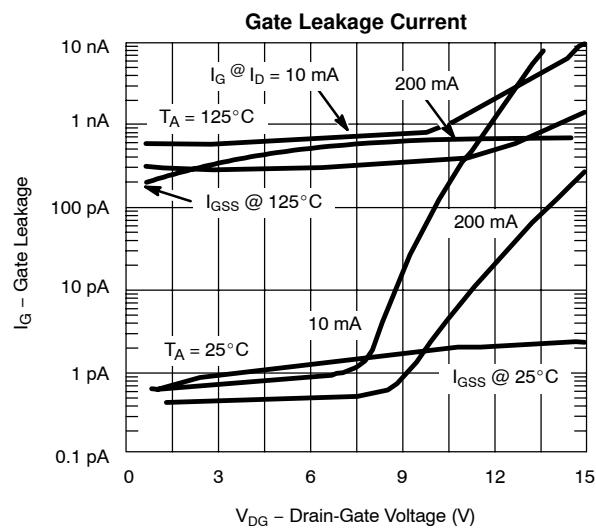
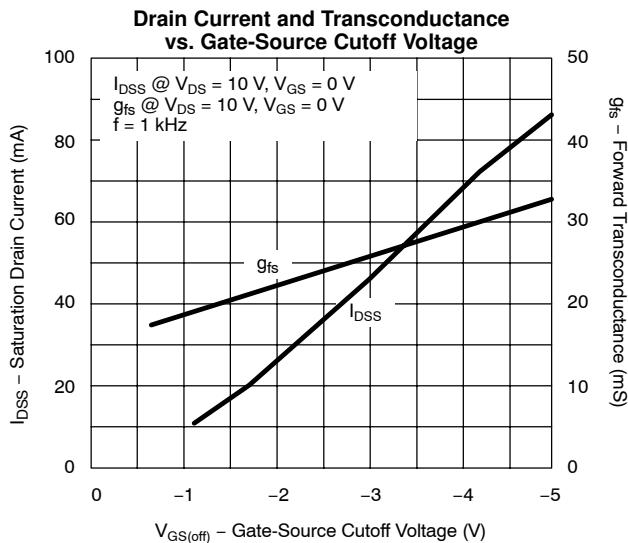
Notes

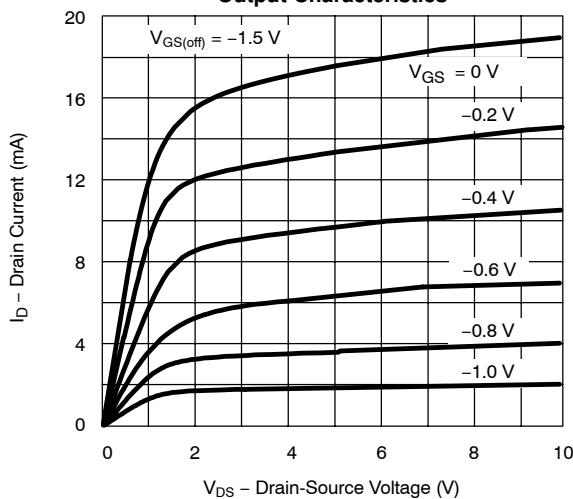
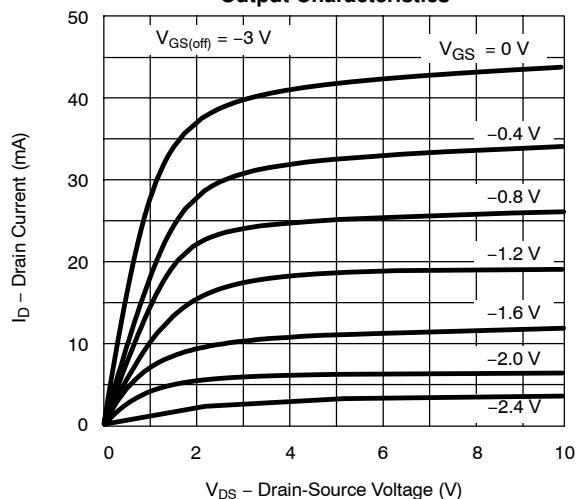
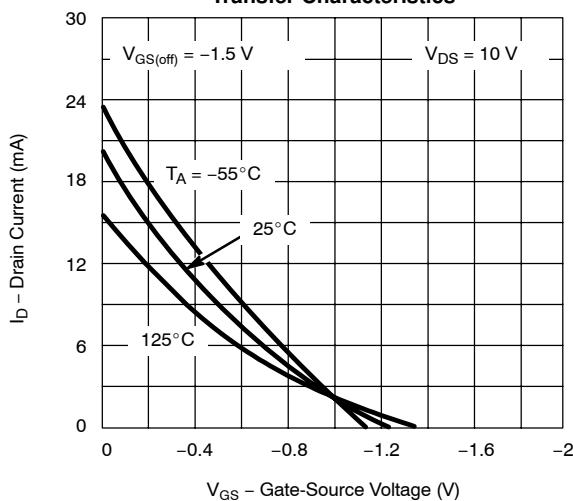
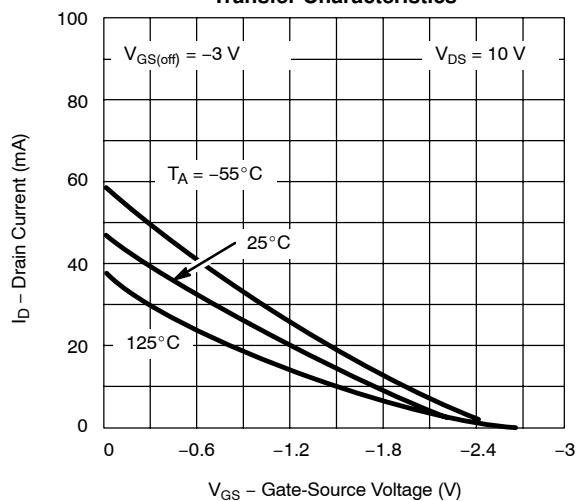
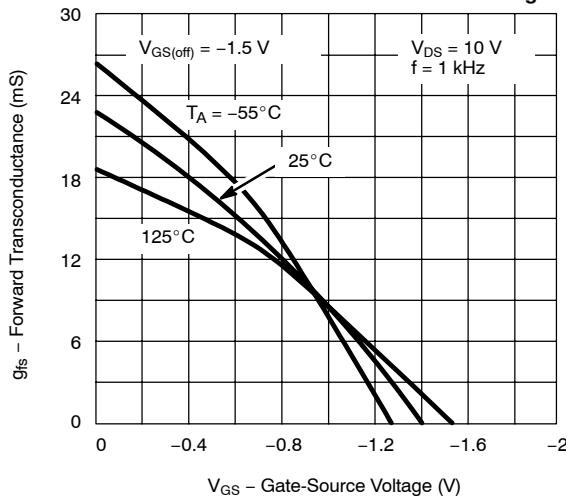
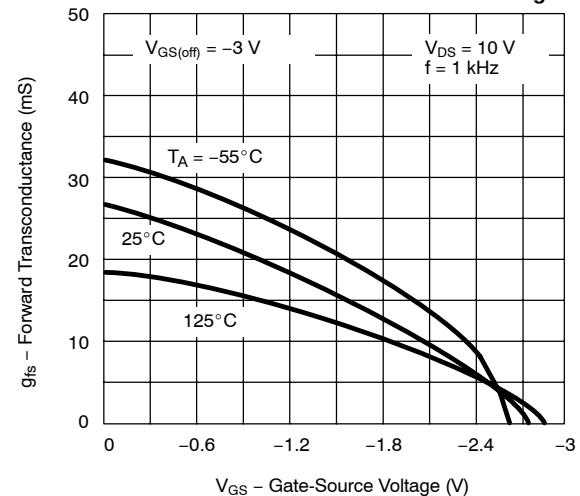
- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- b. Pulse test: PW $\leq 300 \mu\text{s}$ duty cycle $\leq 3\%$.
- c. Gain (G_{pg}) measured at optimum input noise match.
- d. Not a production test.

NZB

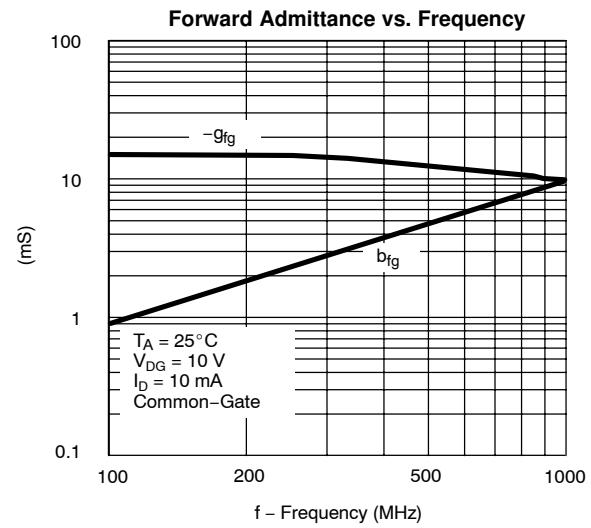
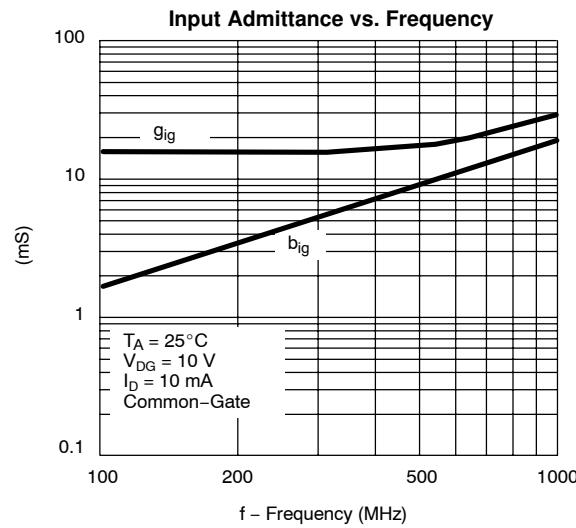
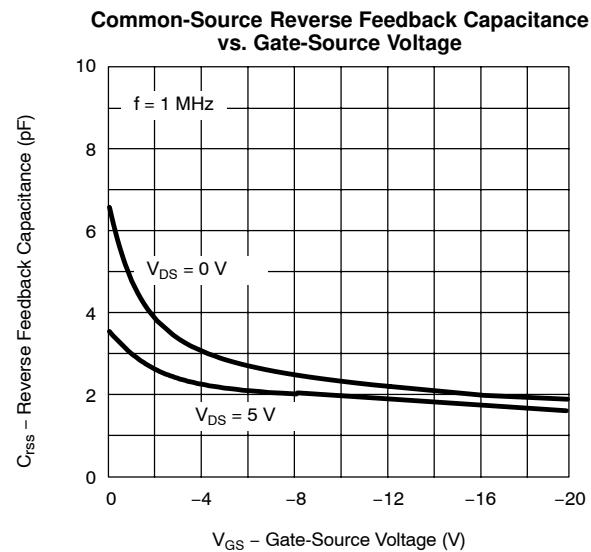
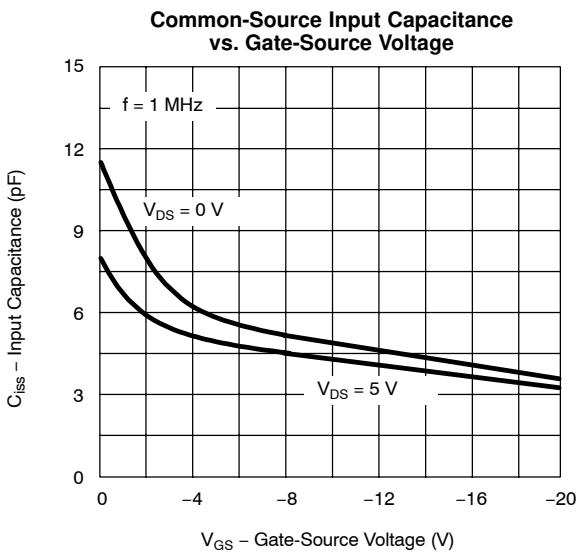
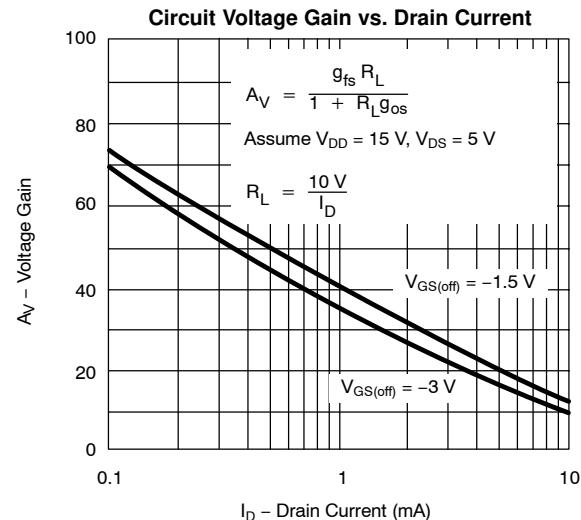
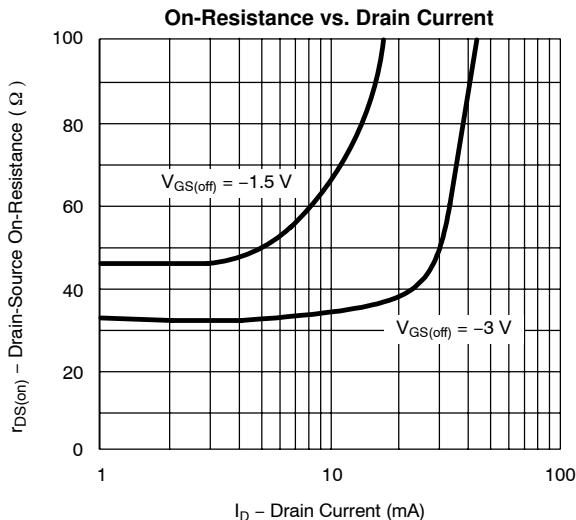
Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

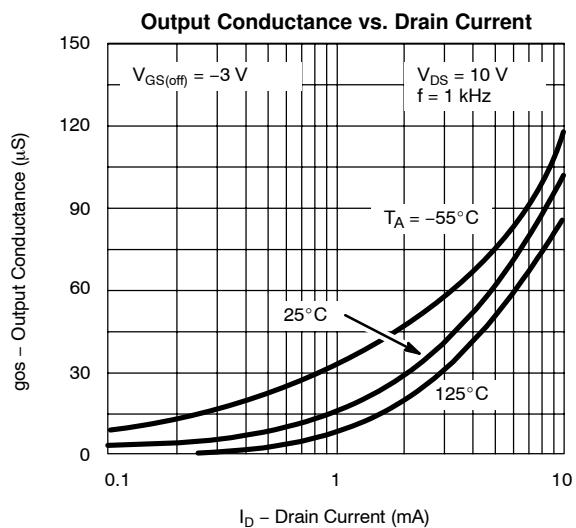
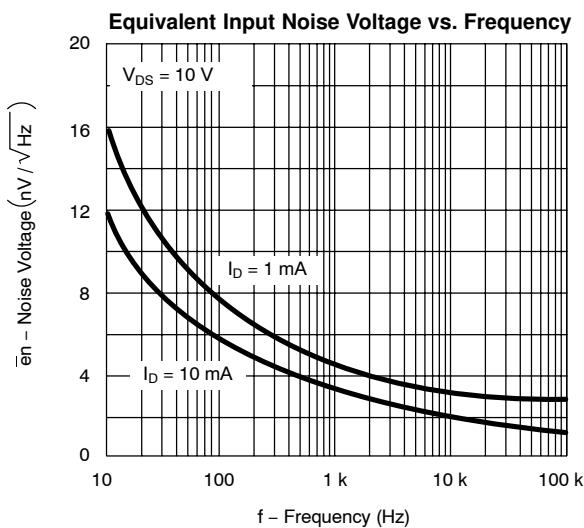
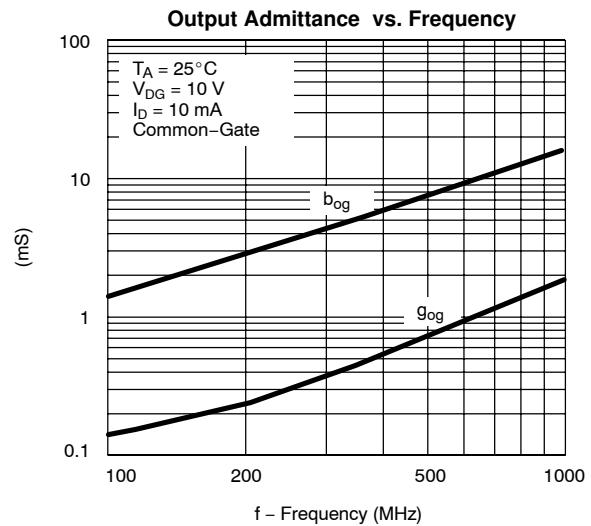
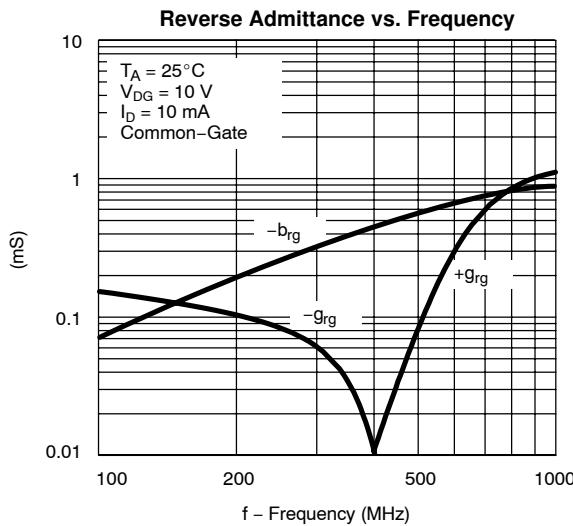
TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)
Output Characteristics

Output Characteristics

Transfer Characteristics

Transfer Characteristics

Transconductance vs. Gate-Source Voltage

Transconductance vs. Gate-Source Voltage


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)




Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.